

119

04-24-2020 LETTING ITEM 119

P.A. SITE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	DIST 8 ITS 2021-1	VARIOUS	3	1
		ILLINOIS	CONTRACT NO. 76M58	




STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

# PROPOSED HIGHWAY PLANS

VARIOUS ROUTES  
SECTION DIST 8 ITS 2021-1  
MAINTAIN & SERVICE  
ALL ITS EQUIPMENT  
VARIOUS COUNTIES

C-98-091-19

- INDEX OF SHEETS:  
1 - COVER SHEET  
2 - SUMMARY OF QUANTITIES  
3 - GENERAL NOTES/WORK ORDER FORM

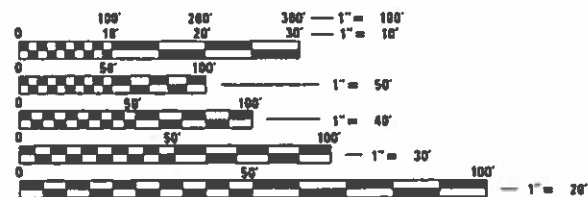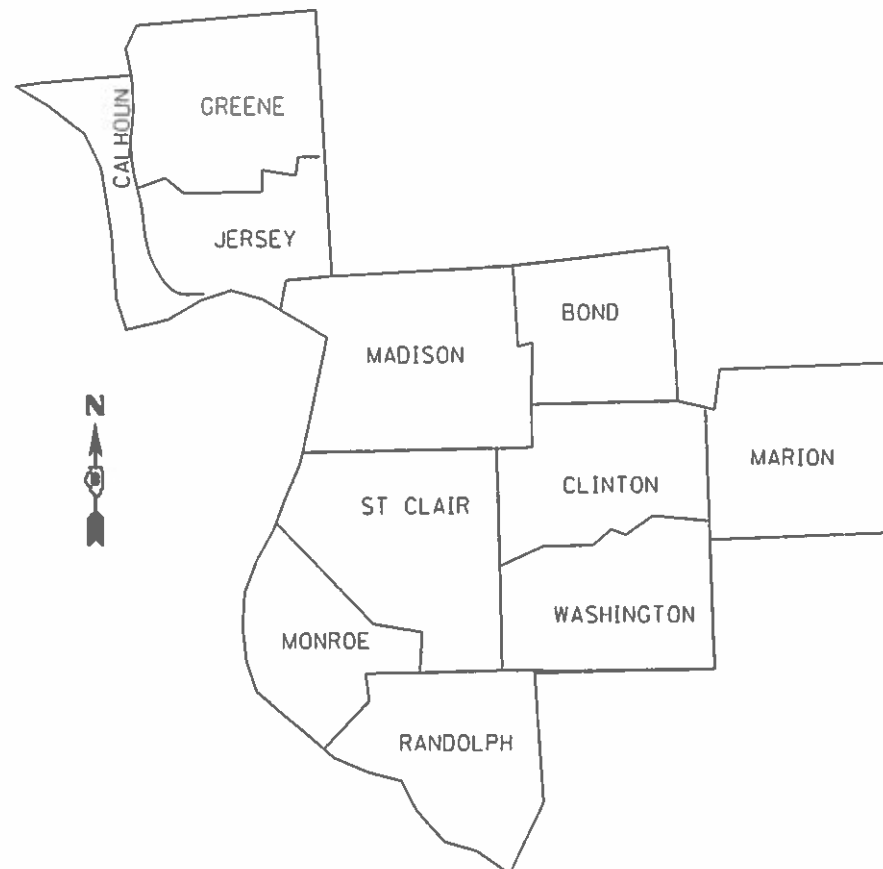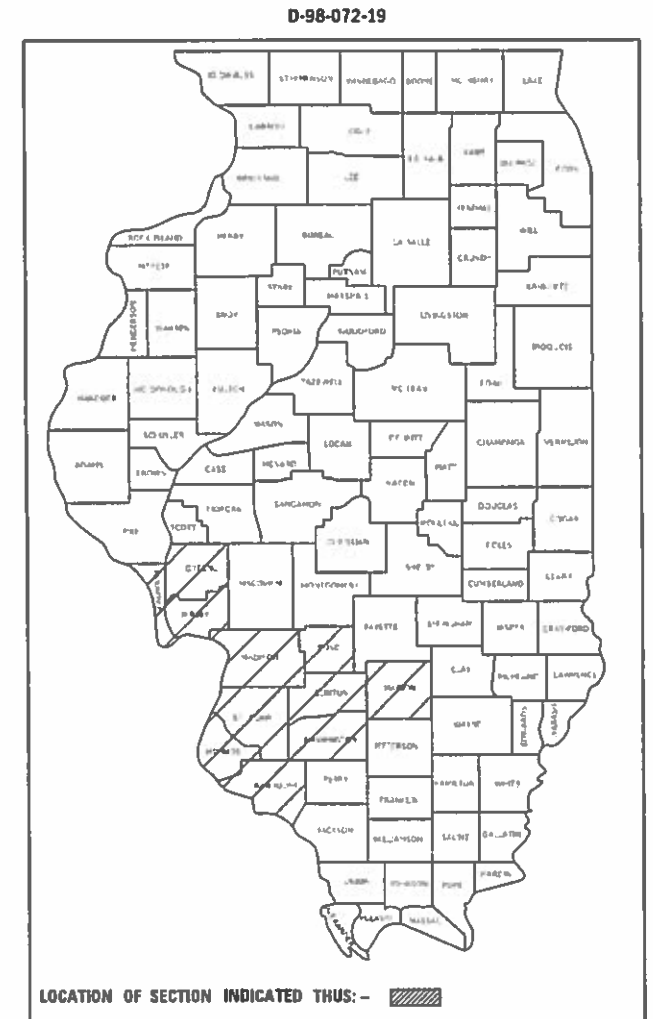

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.  
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATORS  
1-800-892-0123  
OR 811

NOTE: WORK CAN BE LOCATED WITHIN ANY OF THE ABOVE NOTED COUNTIES WITHIN DISTRICT 8/REGION 5.

PROJECT ENGINEER: HERVE GELIN (618) 346-3179  
PROJECT MANAGER: MICHAEL PRESTON (618) 346-3143

CONTRACT NO. 76M58

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

SUBMITTED Jan 14 20 20  
Raikh Roberts  
REGIONAL ENGINEER

March 20 20 20  
Scott A. Etk  
ENGINEER OF DESIGN AND ENVIRONMENT

March 20 20 20  
Gerrard J. [Signature]  
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY  
OF THE STATE OF ILLINOIS



GENERAL NOTES

1. THE LOCATIONS OF THE REPAIR AREAS SHALL BE DETERMINED BY THE ENGINEER.
2. NO MATERIAL SHALL BE LEFT ON OR NEAR THE ROADWAY DURING NON-WORKING HOURS.
3. ANY NECESSARY TRAFFIC CONTROL WILL BE PROVIDED BY THE CONTRACTOR; APPROPRIATE STANDARDS ARE LISTED BELOW.
4. ILLINOIS STATE LAW REQUIRES A 48-HOUR NOTICE TO BE GIVEN TO UTILITIES BEFORE DIGGING. FIELD MARKING OF FACILITIES MAY BE OBTAINED BY CONTACTING J.U.L.I.E. (1-800 892-0123 OR 811) OR FOR NON-MEMBERS THE UTILITY COMPANY DIRECTLY.
5. A FLAGGER SHALL BE REQUIRED AT ALL TIMES WHEN WORKERS OR EQUIPMENT ARE ENCROACHING ON THE LANE OF TRAFFIC.
6. WHEN NO WORK IS BEING PERFORMED, THE FLAGGERS WILL NOT BE REQUIRED. IF THE FLAGGERS ARE NOT PRESENT, THE FLAGGER SIGNS SHALL BE REMOVED OR COVERED.
7. ALL EXCAVATION ADJACENT TO THE EDGE OF PAVEMENT SHALL BE PROTECTED WITH THE EXTENDED LEG BARRICADES AND THE APPROPRIATE LIGHTS.
8. 45 & 55 MPH SIGNS ARE INCLUDED IN ALL INTERSTATE LANE CLOSURES. IF THE LANE CLOSURE DURATION IS LESS THAN 4 HOURS, THE 45 & 55 MPH SIGNS ARE NOT REQUIRED.
9. ANY WORK ORDER MAY BE CANCELLED AT THE ENGINEER'S DISCRETION.
10. NO OVERNIGHT LANE CLOSURES WILL BE ALLOWED.

HIGHWAY STANDARDS

701001-02	701400-09	701451-05
701006-05	701401-12	701456-05
701106-02	701406-12	701601-09
701201-05	701421-08	701606-10
701206-05	701422-10	701701-10
701301-04	701446-09	701901-08



**Work Order                      ITS 1**

**Requested By:** \_\_\_\_\_ **Date:** \_\_\_\_\_ **Time:** \_\_\_\_\_

**Assigned To:** \_\_\_\_\_ **Received From:** \_\_\_\_\_

**Estimated Cost:** \_\_\_\_\_

**Location:** \_\_\_\_\_

**Problem:**

**Ref/Accident #:** \_\_\_\_\_ **Claim #:** \_\_\_\_\_

**Remarks:** \_\_\_\_\_

**Completed By:** \_\_\_\_\_ **Date/Time Completed:** \_\_\_\_\_

MODEL: Default  
FILE: \\hpc1\p1anrom\dat\illinois.gov\PIWDOT\Documents\DOT\_Offices\District 8\Projects\0876M58\CADD\0876M58.dgn

USER NAME = prestonme	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
PLOT DATE = 1/13/2020	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**GENERAL NOTES/  
TYPICAL WORK ORDER FORMS**

SCALE:                      SHEET                      OF                      SHEETS                      STA.                      TO                      STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	DIST 8 ITS 2021-1	VARIOUS	3	3
			CONTRACT NO. 76M58	
		ILLINOIS	FED. AID PROJECT	