


STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION


Sheet S15 of S25

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	81-IHBY-D	ROCK ISLAND	120	44
FED. ROAD DIST. NO. 2	ILLINOIS	FED. AID PROJECT		


Contract # 64C74

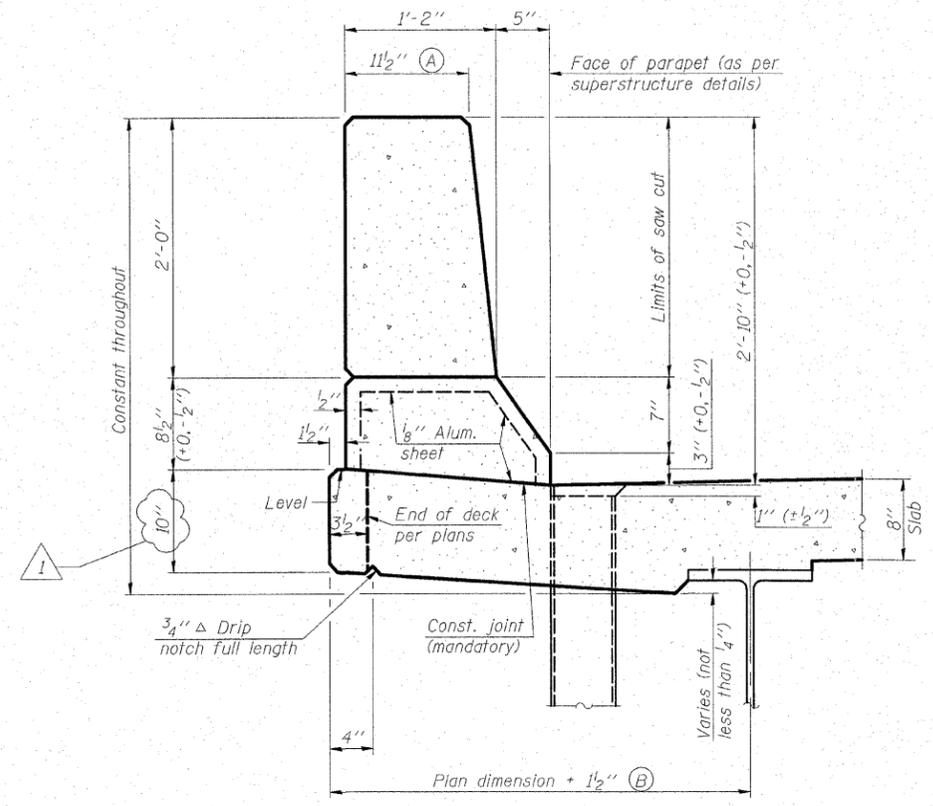


**SECTION**  
(Showing dimensions)

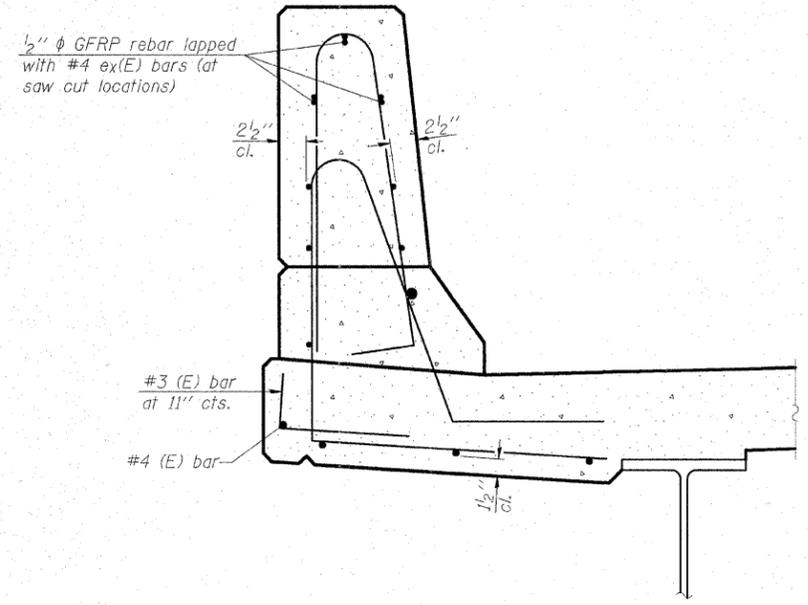

**SECTION**  
(Showing reinforcement clearances for slip forming and additional reinforcement bars)



**#3 (E) BAR**

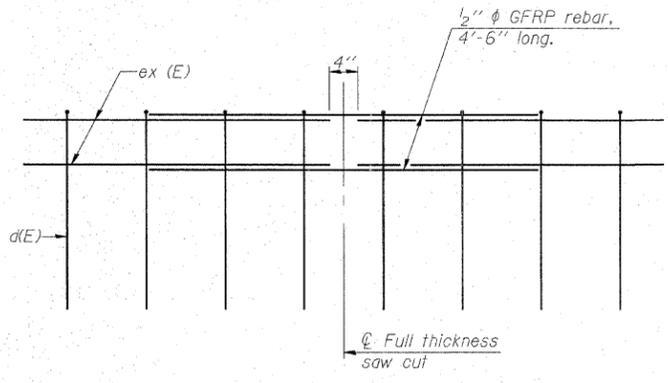

**GFRP REBAR STIFFENING DETAIL**  
(Place as shown in parapet section at each parapet joint location.)

**GENERAL NOTES**

All dimensions shall remain the same as shown on contract plans, except dimensions A and B which are to be revised as shown to provide additional clearance. Additional concrete needed to revise dimension A and B = 0.0165 cu. yds./ft. of parapet. Place aluminum sheet in curb portion at and near piers. Full thickness saw cut at all joint locations in lieu of cork joint filler.

©USERS & ©TIMES & ©FILES  
 ©DATE & ©TIME & ©FILES

**PATRICK**  
ENGINEERING INC.  
ILLINOIS

9-3-07

Revised, April 8, 2008.

ILLINOIS DEPARTMENT OF TRANSPORTATION  
**CONCRETE PARAPET  
SLIPFORMING OPTION**  
INTERSTATE 80 OVER INTERSTATE 88  
F.A.I. ROUTE 80 - SECTION 81-IHBY-D  
ROCK ISLAND COUNTY  
STATION 217+81.50  
EB S.N. 081-0012 & WB 081-0013  
DRAWN BY: A. Yarglooglu  
CHECKED BY: A. Durbak  
DATE: FEBRUARY 27, 2008