



*** REDUCE TO 40' (12 m) O.C. ON CURVES WITH POSTED OR ADVISORY SPEED 45 M.P.H. (70 km/h) OR LESS.

TWO-LANE/TWO-WAY

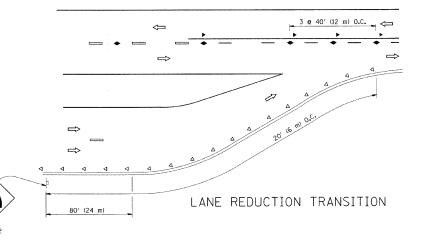



80' (24 m) 0.C.

SEE NOTE B

40' (12 m) 0.C.

(3 m)(3 m)

40' (12 m) 0.C.

SEE NOTE A

MULTI-LANE/UNDIVIDED

SEE NOTE B

SEE NOTE B

O SEE NOTE A

 \Leftrightarrow

80' (24 m) O.C.

MULTI-LANE/DIVIDED

GENERAL NOTES

- 1. MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- 2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- 3. MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

LANE MARKER NOTES

A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.


B REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.

SYMBOLS

- ----- YELLOW STRIPE
- WHITE STRIPE
- ONE-WAY AMBER MARKER
- ONE-WAY CRYSTAL MARKER (W/O)
- ◆ TWO-WAY AMBER MARKER

DESIGN NOTES

- 1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- 2. EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE LINES.
- 3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN THE PLANS.
- MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

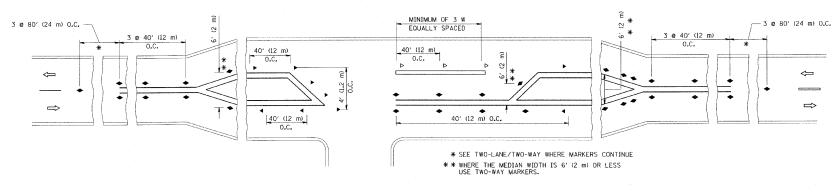

LEFT TURN

All dimensions are in inches (millimeters) unless otherwise shown.

COUNTY SHEETS NO.

COOK 13 11 DESIGNED -T. RAMMACHER 09-19-94 ILE NAME = USER NAME = drivakosgr SECTION TYPICAL APPLICATIONS REVISED -T. RAMMACHER 03-12-99 STATE OF ILLINOIS DRAWN 1617-1-1 RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT) 2729 **DEPARTMENT OF TRANSPORTATION** REVISED -T. RAMMACHER 01-06-00 PLOT SCALE = 50.000 '/ IN. CHECKED CONTRACT NO. 60J69 TC-11 CONTRA SHEET NO. 1 OF 1 SHEETS STA. REVISED - C. JUCIUS 09-09-0