## GENERAL NOTES AND DETAILS

## GENERAL NOTES

THE CONTRACTOR SHALL CAREFULLY PRESERVE ALL PROPERTY MARKS, SECTION OR SUBSECTION MONUMENTS ENCOUNTERED, UNTIL AN OWNER OR AUTHORIZED SURVEYOR OR AGENT HAS WITNESSED OR OTHERWISE REFERENCED THEIR LOCATION. ANY PROPERTY MARKS, SECTION OR SUBSECTION MONUMENTS UNLESS REFERENCED, DAMAGED BY THE CONTRACTOR SHALL BE REPLACED AT THE EXPENSE OF THE CONTRACTOR.

THE CONTRACTOR SHALL REMOVE ALL STRUCTURES WITHIN THE EXISTING RIGHT OF WAY AS DIRECTED BY THE ENGINEER AND AS SHOWN ON THE PLANS. NO ADDITIONAL COMPENSATION WILL BE ALLOWED.

ALL TELEPHONE AND ELECTRIC POLES, GAS PIPES, ETC. IN THE WAY OF THE IMPROVEMENT SHALL BE MOVED BY THE UTILITIES PRIOR TO CONSTRUCTION AND SHALL NOT BE INCLUDED IN THE CONTRACT. THE CONTRACTOR SHALL NOTIFY THE RESPECTIVE UTILITIES TO MAKE THE NECESSARY ADUSTMENTS PRIOR TO THIS CONSTRUCTION.


THE LOCATION AND ELEVATION OF THE VARIOUS UNDERGROUND UTILITIES AS SHOWN ON THE PLANS ARE NOT TO BE TAKEN AS EXACT. THE CONTRACTOR SHALL USE SPECIAL CARE WHEN CONDUCTING CONSTRUCTION OPERATIONS NEAR THEM TO PREVENT DAMAGE.

THE FINAL TOP 4" OF SOIL IN ANY AREA DISTURBED BY THE CONTRACTOR MUST BE ABLE TO SUPPORT VEGETATION.


EXISTING STREET SIGNS AND TRAFFIC SIGNS THAT ARE WITHIN THE CONSTRUCTION LIMITS SHALL BE REMOVED AND RESET BY THE CONTRACTOR. COST OF REMOVING AND RESETTING SHALL BE INCIDENTAL TO EARTH EXCAVATION (SPECIAL).

WHERE THE PROPOSED CONSTRUCTION MEETS AN EXISTING BITUMINOUS SURFACE, OR WHERE SAWING IS STATED ON THE PLANS, THE EXISTING SURFACE SHALL BE SAWED IN A NEAT, STRAIGHT LINE. COST OF SAWING TO BE INCLUDED IN THE CONTRACT UNIT PRICE PER UNIT OF EARTH EXCAVATION (SPECIAL).


ANY TEMPORARY SEEDING THAT IS NECESSARY AS DIRECTED BY THE ENGINEER, SHALL BE PAID AS SEEDING, CLASS 7

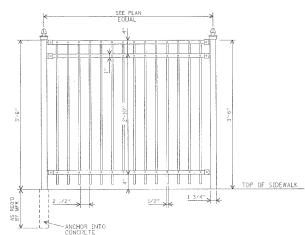

ORNAMENTAL FENCE COMPLETE STA. 23+66 TO STA. 24+82

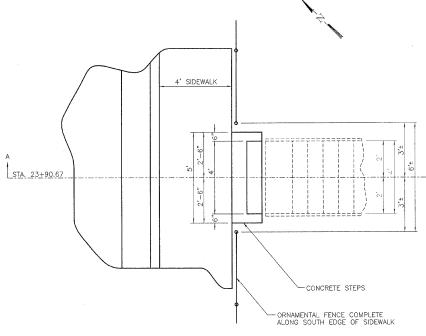


PLAN VIEW

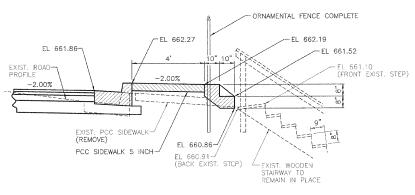


SECTION A-A

## STA. RT. 23+90.67 STAIRS DETAIL

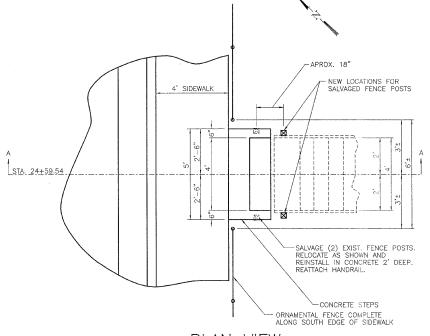

PLAN VIEW

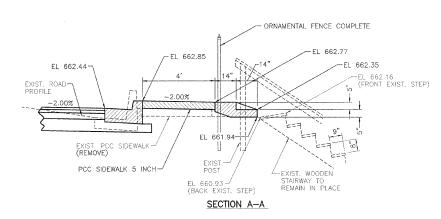

STA. RT. 24+59.54 STAIRS DETAIL

		DIXON - BO	YD STREET -	HORIZONTAL C	ONTROL POINTS
POINT #	STATION	0/S	NORTH	EAST	DESCRIPTION
151	17+27.34	-17.47	1887946.54	2483193.01	PK NAIL
X2886	23+35.23	-15.24	1888244.74	2483702.71	NAIL
3357	26+04.23	22.94	1888392.56	2483930.68	NAIL
	- decreased	DIXON -	BOYD STREET	- VERTICAL E	BENCH MARKS
STATION	0/\$	ROAD	ELEV.		DESCRIPTION
16+72.93	25,59	BOYD	662,41	"M" IN MUELL	ER @ S/W COR, OF BOYD ST. & BRINTON AVE.
20+84.90	-48.22	BOYD	662.4	"0" IN OPE	N @ N/W COR, OF BOYD ST. & DIXON AVE.
27+71.73	-46.53	BOYD	671.34	"M" IN MUELL	ER @ N/W COR. OF BOYD ST. & EVERETT ST.

S:/TRANS/	1050D07.	/COVERET	C.DGN

FILE NAME :	USER NAME = \$USER\$	DESIGNED	REVISED	WILLETT, HOFMANN & ASSOCIATES, INC		F.A. SECTION COUNTY TOTAL SHEE SHEETS NO.
\$FILEL\$		DRAWN	REVISED	CONSULTING ENGINEERS	GENERAL NOTES AND DETAILS	5482 07-00171-00-FP LEE 25 6
	PLOT SCALE - \$SCALE\$	CHECKED	REVISED			CONTRACT NO. 85429
	PLOT DATE = \$3ATE\$	DATE	REVISED	DIXON, IL	SCALE: SHEET NO OF SHEETS STA TO STA	FED. ROAD DIST. NO   ILLINOIS   FED. AID PROJECT