



*** REDUCE TO 40' (12 m) O.C. ON CURVES WITH POSTED OR ADVISORY SPEED 45 M.P.H. (70 km/h) OR LESS.

TWO-LANE/TWO-WAY

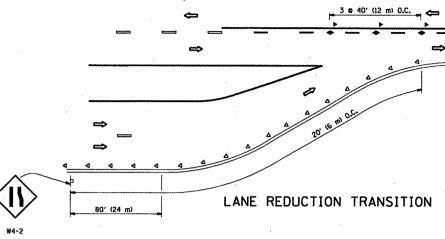

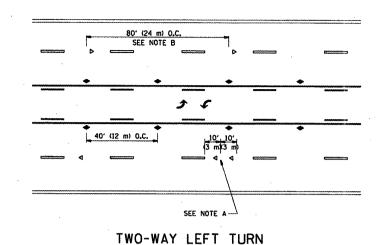

80' (24 m) O.C.


SEE NOTE B

40' (12 m) O.C.

(3 m)(3 m)

SEE NOTE A

MULTI-LANE/UNDIVIDED

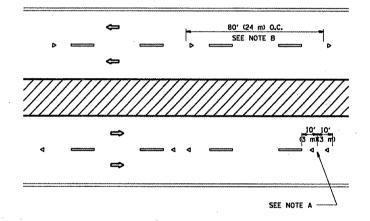

MULTI-LANE/DIVIDED

GENERAL NOTES

- 1. MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- 2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- 3. MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

LANE MARKER NOTES

- B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.
- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.

SYMBOLS

-- YELLOW STRIPE


WHITE STRIPE

- ONE-WAY AMBER MARKED
- ONE-WAY CRYSTAL MARKER (W/O)
- TWO-WAY AMBER MARKER

DESIGN NOTES

1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.

- EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE LINES.
- 3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN THE PLANS.
- 4. MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

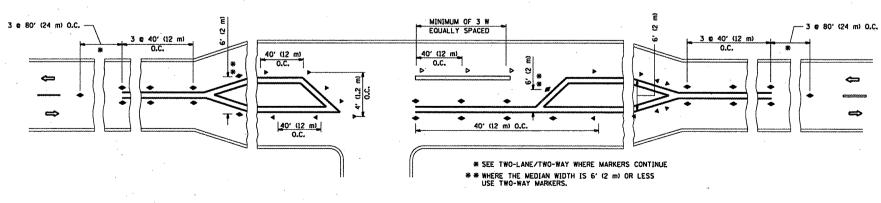

LEFT TURN

All dimensions are in inches (millimeters) unless otherwise shown.

DESIGNED -REVISED - T. RAMMACHER 09-19-94 F.A. SECTION COUNTY TOTAL SHEETS NO.

VAR. 2009-057PCC-PP LK.+MCH. 23 19 TYPICAL APPLICATIONS REVISED - T. RAMMACHER 03-12-99 STATE OF ILLINOIS ::\pw.work\PWIDOT\WILGREENDP\dØ1250 DRAWN stStd.dan RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT) REVISED -T. RAMMACHER 01-06-00 PLOT SCALE = 100.0000 '/ IN. CHECKED -**DEPARTMENT OF TRANSPORTATION** CONTRACT NO. 60448 PLOT DATE = 5/18/2009 DATE REVISED SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA.