

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION



F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D2 REFLECTOR REPL 26-02	VARIOUS	3	1
		ILLINOIS	CONTRACT NO. 46660	

PROPOSED  
HIGHWAY PLANS

INDEX OF SHEETS:

- COVER SHEET, SHEET No. 1
- GENERAL NOTES, SHEET No. 2
- STATE STANDARDS, SHEET No. 2
- SUMMARY OF QUANTITIES, SHEET No. 3

VARIOUS ROUTES  
SECTION D2 REFLECTOR REPL 26-02  
VARIOUS COUNTIES

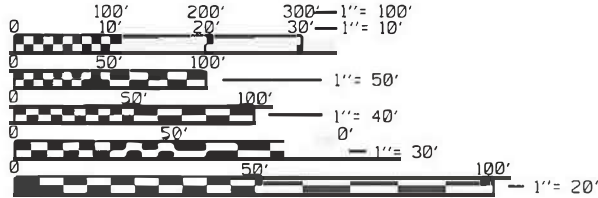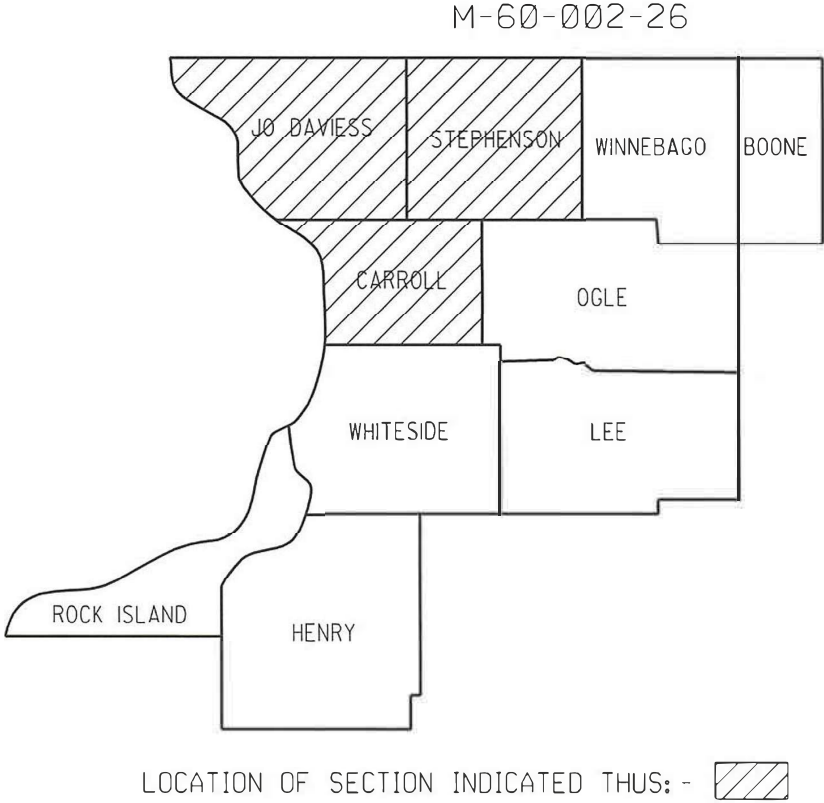

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD  
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT  
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS  
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.  
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION  
1-800-892-0123  
OR 811

PROJECT ENGINEER: TROY EBENEZER (815) 284-5491  
PROJECT MANAGER: KRISTIE NYDEREK (815) 284-5469

CONTRACT NO. 46660

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

SUBMITTED Jan 15 2025  
Julia Shary  
REGIONAL ENGINEER

March 21 2025  
Scott A. Etk  
ENGINEER OF DESIGN AND ENVIRONMENT

March 21 2025  
Harry 5  
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY  
OF THE STATE OF ILLINOIS

GENERAL NOTES

The Department may remove and not install markers in certain locations at the engineer's discretion.

The Department may install markers in certain locations that did not previously have markers at the engineer's discretion.

The locations of the repair areas shall be determined by the engineer.

The work site shall be left in a safe and orderly condition, filling any holes created by the end of the work day.

No material should be left on or near the roadway.

Removal of damaged materials will include loading, hauling, and disposal.

Any necessary traffic control will be provided by the contractor; appropriate standards are listed on Sheet No. 2.

Traffic control shall not be paid for as separate pay items, but shall be considered a part of the contract.

The quantities specified in this contract are only an estimate to allow Contractors to establish unit prices and permit the Department to determine the low bidder. It shall be understood that the unit prices of this contract shall prevail throughout the contract regardless of the quantity.

STATE STANDARDS

701006-05	OFF-RD OPERATIONS, 2L2W, 15' to 24" FROM PAVEMENT EDGE
701101-05	OFF-RD OPERATIONS, MULTI-LANE, 15' to 24" FROM PAVEMENT EDGE
701301-04	LANE CLOSURE, 2L2W, SHORT TIME OPERATIONS
701306-04	LANE CLOSURE, 2L2W, SLOW MOVING OPERATION, DAY ONLY, FOR SPEEDS ≥ 45 MPH
701311-03	LANE CLOSURE, 2L2W, MOVING OPERATION, DAY ONLY
701411-09	LANE CLOSURE, MULTI-LANE, AT ENTRANCE OR EXIT RAMP, FOR SPEEDS ≥ 45 MPH
701426-09	LANE CLOSURE, MULTI-LANE, INTERMITTANT/MOVING OPER, FOR SPEEDS ≥ 45 MPH
701427-05	LANE CLOSURE, MULTI-LANE, INTERMITTANT/MOVING OPER, FOR SPEEDS < 40 MPH
701501-06	URBAN LANE CLOSURE, 2L2W, UNDIVIDED
701502-09	URBAN LANE CLOSURE, 2L2W, BIDIRECTIONAL LEFT TURN LANE
701901-10	TRAFFIC CONTROL DEVICES
781001-04	TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS

MODEL: S:\000\DRAWINGS  
FILE NAME: STPLS

USER NAME = SUSERS	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	GENERAL NOTES & STATE STANDARDS	SCALE: SHEET OF SHEETS STA. TO STA.	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	DRAWN -	REVISED -				VAR.	D2 REFLECTOR REPL 26-02	VARIOUS	2	
PLOT SCALE = SCALES	CHECKED -	REVISED -				CONTRACT NO. 46660				
PLOT DATE = SDATES	DATE -	REVISED -				ILLINOIS FED. AID PROJECT				

SUMMARY OF QUANTITIES

PAYCODE	ITEM DESCRIPTION	UNIT	0021 TOTAL QUANTITY	100% STATE RURAL
78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	15,000	15,000
78100300	REPLACEMENT REFLECTOR	EACH	25,000	25,000
78300200	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	EACH	15,000	15,000

MODEL: \$MODELNAME\$  
FILE NAME: \$FILES\$