
RTE NO.	SECTION	COUNTY	TOTAL	SHEET #
FA 646	125W-1, RS-2	PEORIA	256	24

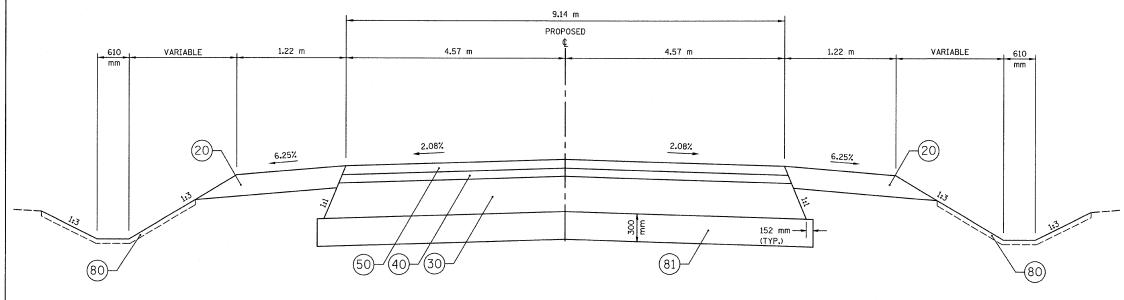

SERVICE DRIVE NO. 5

STA. 0+910.694 TO 0+986.89

LEGEND - EXISTING

- ① P.C.C. PAVEMENT
 ② P.C.C. WIDENING
 ③ FLEXIBLE PAVEMENT
 ④ HOT-MIX ASPHALT OVERLAY, VARIABLE DEPTH

REMOVAL XXXXXX

- 8 PAVEMENT REMOVAL
- 9 PAVED SHOULDER REMOVAL (SPECIAL)
- (1) MEDIAN REMOVAL
 (1) COMBINATION CURB & GUTTER REMOVAL
 (1) HOT-MIX ASPHALT SURFACE REMOVAL (VARIABLE DEPTH)

LEGEND - PROPOSED SHOULDERS

- 20 AGGREGATE SHOULDERS, TYPE B 150MM
 (21) AGGREGATE SHOULDERS, TYPE B, (METRIC TON)
 (22) HOT-MIX ASPHALT SHOULDERS, 200MM
 (23) HOT-MIX ASPHALT SHOULDERS (M TON)

BASE COURSE

- 30 HOT-MIX ASPHALT BASE COURSE, 200MM 31 HOT-MIX ASPHALT BASE COURSE, 250MM

- 33 HOT-MIX ASPHALT BASE COURSE WIDENING, 250MM 34 HOT-MIX ASPHALT BASE COURSE WIDENING, 200MM

BINDER COURSE & LEVELING BINDER COURSE

- 40 POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N70 (38 mm)
- (41) POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N70 (51 mm)
- 42 POLYMERIZED LEVELING BINDER (MACHINE METHOD),
 IL-4.75, N50 (VARIABLE DEPTH)
- (43) POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N70 (VARIABLE DEPTH)

SURFACE COURSE

- 50 POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE,
- MIX "D", N70 (38 mm)
- (51) POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70 (51 mm)

FULL DEPTH PAVEMENT

(T) HOT-MIX ASPHALT PAVEMENT (FULL-DEPTH), 290MM

MISC & STANDARDS

- (80) TOPSOIL FURNISH AND PLACE, 100MM

- (81) SUB-BASE GRANULAR MATERIAL, TYPE A
 (82) COMBINATION CONC C&G, TYPE B-15.60
 (83) PIPE UNDERDRAINS 100MM
 (84) REFER TO STANDARD 482001 (TYPE C SUBBASE)
- 86 STRIP REFLECTIVE CRACK CONTROL

ILLINOIS DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS

REVISIONS

SERVICE DR. NO. 5 SCALE: NONE

DRAWN BY: JRC, JDU CHECKED BY: ECM