




\*\*\* REDUCE TO 40' (12 m) O.C. ON CURVES WITH POSTED OR ADVISORY SPEED 45 M.P.H. (70 km/h) OR LESS.

## TWO-LANE/TWO-WAY

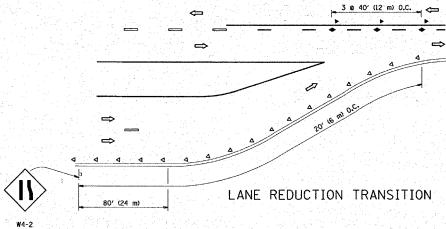


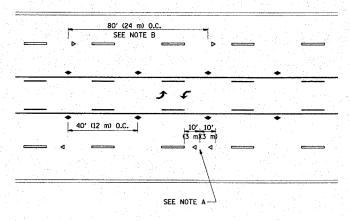

TWO-WAY LEFT TURN

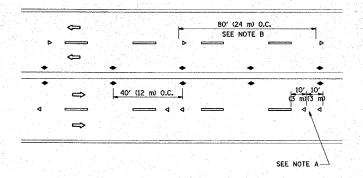

MULTI-LANE/UNDIVIDED

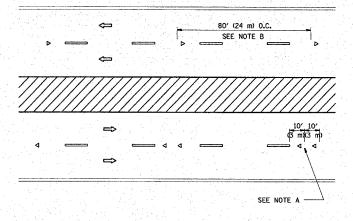

MULTI-LANE/DIVIDED

### GENERAL NOTES

- 1. MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- 2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

## LANE MARKER NOTES

B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.

A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.

#### SYMBOLS

- YELLOW STRIPE

WHITE STRIPE

- ONE-WAY AMBER MARKER
- ONE-WAY CRYSTAL MARKER (W/O)
- ★ TWO-WAY AMBER MARKER

## DESIGN NOTES

- 1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE LINES.
- 3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN THE PLANS.
- 4. MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

# 

LEFT TURN

All dimensions are in inches (millimeters) unless otherwise shown.

TOTAL SHEET SHEETS NO. 26 15 FILE NAME = USER NAME = steedpa DESIGNED REVISED - T. RAMMACHER 09-19-94 SECTION COUNTY TYPICAL APPLICATIONS :\prajects\d137106\sh\_rdwy.dgr STATE OF ILLINOIS 2721 2006-023RS COOK RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT) PLOT SCALE = 50.7515 '/ IN. CHECKED REVISED -T. RAMMACHER 01-06-00 **DEPARTMENT OF TRANSPORTATION** CONTRACT NO. 60B58 TC-11 DATE REVISED SHEET NO. 1 OF 1 SHEETS STA. PLOT DATE = 5/8/2008 FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT