




*** REDUCE TO 40' (12 m) O.C. ON CURVES WITH POSTED OR ADVISORY SPEED 45 M.P.H. (70 km/h) OR LESS.


TWO-LANE/TWO-WAY

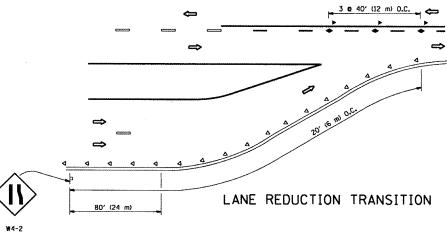

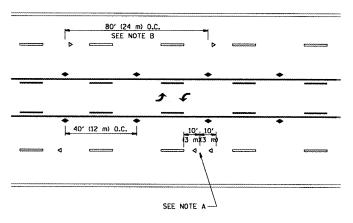

TWO-WAY LEFT TURN

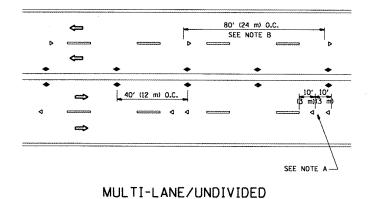

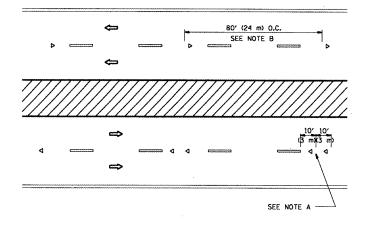

MULTI-LANE/DIVIDED

GENERAL NOTES

- 1. MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- 2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

LANE MARKER NOTES

- B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.
- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.

SYMBOLS

- ---- YELLOW STRIPE
- WHITE STRIPE
- ONE-WAY AMBER MARKER
- ONE-WAY CRYSTAL MARKER (₩/O)
- ◆ TWO-WAY AMBER MARKER

DESIGN NOTES

- 1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE LINES.
- 3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN THE PLANS.
- MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

3 e 80' (24 m) 0.C. 3 e 40' (12 m) 0.C. **	40' (12 m) 0.C.	MINIMUM OF 3 W EQUALLY SPACED A0' (12 m) O.C. A0' (12 m) O.C. * SEE TWO-LANE/TWO-WAY WHERE MARKE	3 e 40' (12 m) 3 e 40' (12 m) 3 e 80' (24 m) 0.C.
		* SEE TWO-LANE/TWO-WAY WHERE MARKE ** WHERE THE MEDIAN WIDTH IS 6' (2 m) USE TWO-WAY MARKERS.	

LEFT TURN

All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = smithkl	DESIGNED -	REVISED - T. RAMMACHER 09-19-94		TOWAL ADDITOATION	F.A. SECTION	COUNTY TOTAL SHEET
\\distIntfs2\users\smithkl\Desktop\CADD	DETAILS\toll.dgn	DRAWN -	REVISED -T. RAMMACHER 03-12-99	STATE OF ILLINOIS	TYPICAL APPLICATIONS	VAR. 2008-046 RS	LAKE 29 26
	PLOT SCALE = 100.000 '/ IN.	CHECKED -	REVISED -T. RAMMACHER 01-06-00	DEPARTMENT OF TRANSPORTATION	RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT)	TC-11	CONTRACT NO. 60E95
DETAIL Street day 6/06/2000 1/66/08 DM Haggarasible	PLOT DATE = 6/26/2008	DATE -	REVISED -		SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.	FED. ROAD DIST. NO. 1 ILLINOIS FED. A	