

Typical Driveway Section

24th Street Resurfacing


18th Avenue to 23rd Avenue

Taken from Accessible Rights-of-Way:

A Design Guide


Published by the U.S. Architectural and

Transportation Barriers Compliance Board

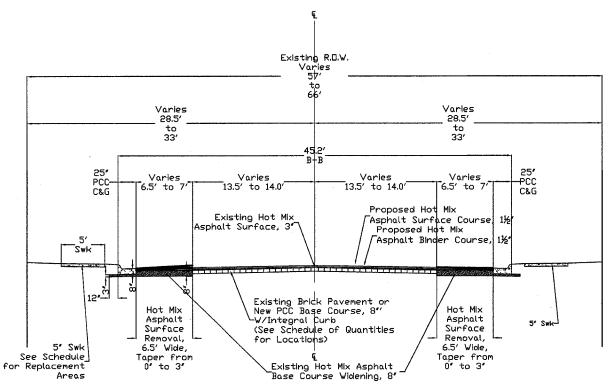

Typical Section 24th Street Resurfacing 18th Avenue to 23rd Avenue

(Sta. 41+75 to Sta. 64+00)

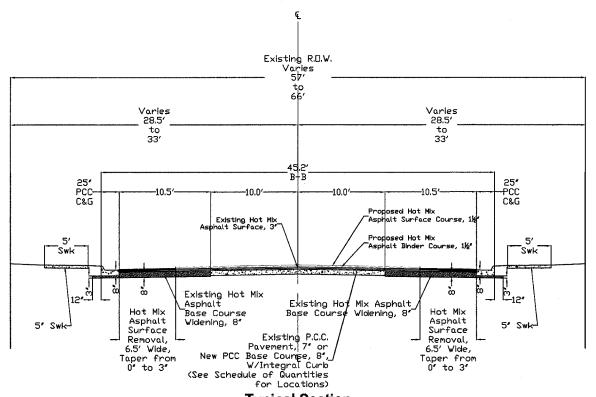

MIXTURE USES	SURFACE PG-64-22 4.0 @ N50	
AC/PG		
DESIGN AIR VOIDS		
MIXTURE COMPOSTION (GRADATION MIXTURE)	IL 9.5 OR IL 12.5	
FRICTION AGGREGATE	D	

MIXTURE USES	LEVEL BINDER		
AC/PG	PG-64-22 4.0 @ N50		
DESIGN AIR VOIDS			
MIXTURE COMPOSTION (GRADATION MIXTURE)	IL 9.5 OR IL 12.5		
FRICTION AGGREGATE	N/A		

Contract # 85434 #06-00180-00-RS TYPICAL SECTION

CITY OF ROCK ISLAND ENGINEERING DIVISION

24th Street Resurfacing 25th Avenue to 31st Avenue

Job Number	Date	3-31-2007
2569	Ву	mdw
Computer Drawing Name	Sheet	2
2569 typ section.dwg		Of

Typical Section
24th Street Resurfacing
23rd Avenue to 25th Avenue
(Sta. 31+50 to Sta. 41+75)