


GUTTER OUTLET ADJACENT TO STABILIZED SHOULDER

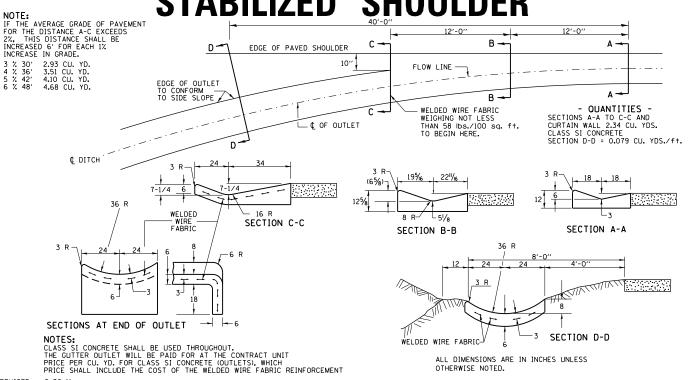

GRADING AROUND WINGWALLS

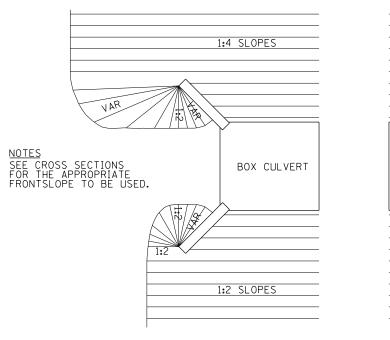



5-27-09


GUTTER OUTLET ADJACENT TO STABILIZED SHOULDER

15.4

GRADING AROUND WINGWALLS

20.4

DETAIL OF HOT-MIX ASPHALT SHOULDER AT GUARD RAIL

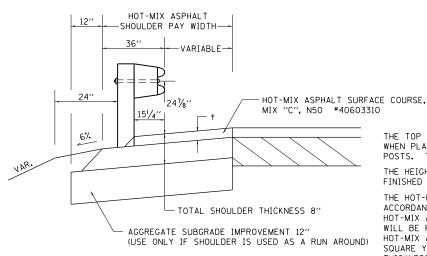

+ = SEE TYPICAL SECTIONS FOR THICKNESS

GENERAL NOTES


THE TOP LIFT SHALL NOT BE PLACED BEHIND THE GUARDRAIL POSTS WHEN PLACING THE TOP LIFT THE RAIL MUST BE REMOVED FROM THE POSTS. THE POST SHALL NOT BE REMOVED.

THE HEIGHT OF THE GUARD RAIL SHALL BE SET 241/8" FROM THE FINISHED SURFACE.


THE HOT-MIX ASPHALT SHOULDER SHALL BE CONSTRUCTED IN ACCORDANCE WITH SECTION 482 EXCEPT THE TOP LIFT SHALL BE HOT-MIX ASPHALT SURFACE COURSE, MIXTURE C. N50, THE WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER TON FOR HOT-MIX ASPHALT SURFACE COURSE, MIXTURE "C", N50 AND SQUARE YARD FOR HOT-MIX ASPHALT SHOULDERS OF THE THICKNESS SPECIFIED. THE REMOVAL & REINSTALLATION OF THE GUARDRAIL WILL BE INCLUDED IN THE COST OF THE HOT-MIX ASPHALT SURFACE COURSE, MIXTURE C, N50.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

DELINEATOR AND POST ORIENTATION



DELINEATORS SHALL BE INSTALLED ACCORDING TO STANDARD 635001 EXCEPT THAT THE POST SHALL BE ROTATED 180°. THE POST WILL HAVE THE WIDE SIDE FACING TRAFFIC AND THE DELINEATOR ATTACHECD AS SHOWN ABOVE.

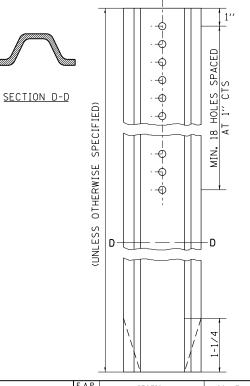

REVISED - 10-03-11 SECTION COUNTY REVISED REGION 2 / DISTRICT 2 STANDARD (83MFT & 103MFT)W ROCK ISLAND 340 213 599 REVISED CONTRACT NO. 64H11 SCALE: 100.0000 / 10.SHEET NO. OF SHEETS STA. REVISED

REVISED - 3-13-13

23.4 PLOT DATE = Wed Mar 20 11:03:38 2013