


SIDE VIEW (SINGLE MEMBER OR DAVIT ARM)

N.T.S.

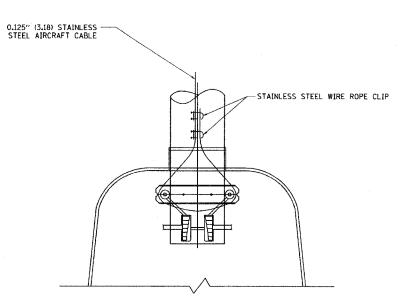

BOTTOM VIEW

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN
- CONTRACTOR SHALL ADJUST THE WIRE CLIP TO ELIMINATE ANY SLACK FROM THE WIRE ROPE.
- 3. THE 0.125" (3.18) STAINLESS STEEL AIRCRAFT CABLE SHALL REMAIN VISIBLE FROM THE GROUND LEVEL
- 4. THE BREAKING STRENGTH OF THE CABLE SHALL BE 1700 LBS. MIN

LUMINAIRE SAFETY CABLE ASSEMBLY SCALE: VERT. HORIZ. DATE: 1/17/2007 CHECKED BY	REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION	
CABLE ASSEMBLY SCALE: VERT. DRAWN BY	NAME	DATE	ILLINOIS DE ARTICE	INT OF TRANSPORTATION
SCALE: HORIZ. DRAWN BY				
DATE: 1/17/2007 CHECKED BY			SCALE: HORIZ.	
			DATE: 1/17/2007	CHECKED BY

REVISION DATE: 01/01/07

PLOT DATE = 1/17/2807 FILE NAME = chypcojects/distad/be701.dgn PLOT SCALE = 560.800 // IN. USER NAME = Lirochd