



## PRISMATIC REFLECTORS




## NOTES

- PRISMATIC REFLECTORS SHALL BE MONO-DIRECTIONAL AND POSITIONED SO THAT THE REFLECTIVE FACE IS FACING THE APPROACHING TRAFFIC.
- 2. PRISMATIC REFLECTORS SHALL BE SECURED IN PLACE WITH AN EPOXY ADHESIVE.
- 3. PRISMATIC REFLECTORS SHALL BE EITHER AMBER OR CRYSTAL IN COLOR.



150' AND LONGER

## TYPICAL PLACEMENT OF ARROWS IN TURN LANES

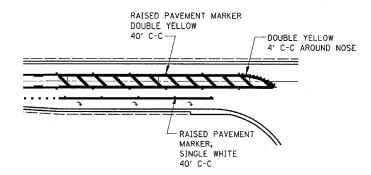

## RAISED REFLECTIVE PAVEMENT MARKERS @ RIGHT TURN LANE

REVISIONS
NAME DATE

PAVEMENT MARKING

SCALE: VERT.
HORIZ.

DRAWN BY

CHECKED BY

2/21/2006