
PLANT LIST

NOTE: QUANTITIES ON THE PLANT LIST ARE PROVIDED FOR INFORMATION ONLY. PLANT QUANTITIES UNDER THE CONTRACT ARE INDICATED ON THE PLANS. IN THE EVENT OF ANY DISCREPANCIES, THE CONTRACT SHALL BE BASED ON THE QUANTITIES SHOWN ON THE PLANS.

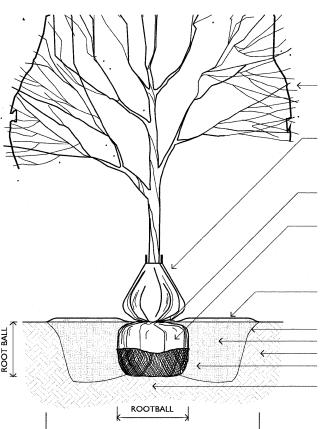

TREE WITH STRONG CENTRAL LEADER (DO NOT PRUNE, STAKE, OR WRAP TREES UNLESS DIRECTED TO DO SO BY THE LANDSCAPE ARCHITECT)

TREE WATERING BAG (SEE SPECIFICATIONS) INSTALL SAME DAY TREE IS PLANTED, BAG TO REMAIN ON TREE AND KEPT FULL THROUGHOUT THE GROWING SEASON DURING FULL WARRANTY PERIOD

CROWN OF ROOT BALL FLUSH WITH FINISH GRADE LEAVING TRUNK FLARE VISIBLE AT THE TOP OF ROOT BALL

REMOVE ALL TWINE, ROPE, WIRE, BURLAP, AND PLASTIC WRAP FROM TOP HALF OF ROOT BALL (IF PLANT IS SHIPPED WITH A WIRE BASKET AROUND THE ROOT BALL, CUT WIRE IN FOUR PLACES AND FOLD DOWN 8" INTO PLANTING

3" DEPTH MULCH LAYER, AFTER SETTLEMENT, IN A 4' DIAMETER RING. DO NOT PLACE MULCH IN CONTACT WITH TREE TRUNK

ROUGHEN EDGES OF PLANTING PIT PLANTING MIXTURE BACKFILL UNEXCAVATED OR EXISTING SOIL TAMP PLANTING MIXTURE AROUND BASE AND UNDER ROOT BALL TO STABILIZE TREE ROOT BALL ON UNEXCAVATED OR TAMPED

EXCAVATE TREE PIT TO BE 3 TIMES WIDER THAN ROOT BALL DIAMETER

DECIDUOUS TREE IN TURF PARKWAY


DECIDUOUS TREE IN TREE GRATE, SECTION PERPENDICULAR TO ROAD SCALE: 1/2" = 1'-0"

TREE WITH STRONG CENTRAL LEADER (DO NOT PRUNE, STAKE, OR WRAP TREES UNLESS DIRECTED TO DO SO BY THE LANDSCAPE ARCHITECT) TREE WATERING BAG (SEE SPECIFICATIONS)
INSTALL SAME DAY TREE IS PLANTED, BAG NEW CONC. BORDER TO REMAIN ON TREE AND KEPT FULL AT BACK OF EXISTING THROUGHOUT THE GROWING SEASON DURING FULL WARRANTY PERIOD CAST IRON TREE GRATE CENTER EXISTING CONC. TRUNK IN TREE GRATE OPENING SIDEWALK NEW CONC. COURTESY STRIP EXTENT OF SOIL EXCAVATION AND STRUCTURAL SOIL BACKFILL TAMPED SOIL AROUND BASE OF ROOT BALL COMPACTED SUBGRADE


LANDSCAPE AREAS **DEPTH** LAWN AREAS (SOD) 6" TOPSOIL VARIES, 12" PLANTING MIX, MIN MEDIAN PLANTERS PER TREE INSTALLATION DETAIL SHADE AND ORNAMENTAL TREES

SOIL DEPTH CHART

NOTE: THE CONTRACTOR IS TO SUPPLY SOIL FILL MATERIAL TO THE DEPTHS INDICATED ON THE



PERENNIAL INSTALLATION DETAIL

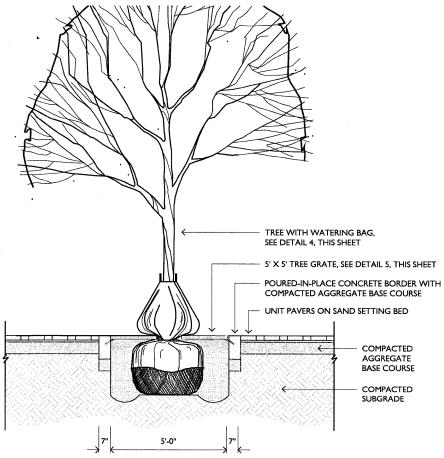

TREE GRATE AND PAVERS, SECTION PARALLEL TO ROAD

. ENGINEERING

WOLFF LANDSCAPE ARCHITECTURE

DESIGNED - TGW / PME REVISED PMB REVISED CHECKED - TGW REVISED DATE -02.06.12 REVISED

STATE OF ILLINOIS

SCALF

SECTION SHEETS **PLANT LIST AND DETAILS** 10-00116-00-SW 40 20 CONTRACT NO. 63631 SHEET NO. 20 OF 40 SHEETS STA. TO STA FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJ. M-TE-00D1(82

DEPARTMENT OF TRANSPORTATION