



#### OPTION 1

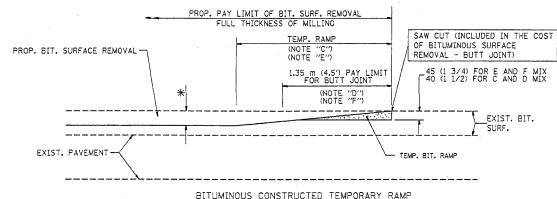

BITUMINOUS CONSTRUCTED TEMPORARY RAMP
(FOR BUTT JOINT AND BIT. TAPER SEE DETAIL BELOW)

## OPTION 2


### TYPICAL TEMPORARY RAMP

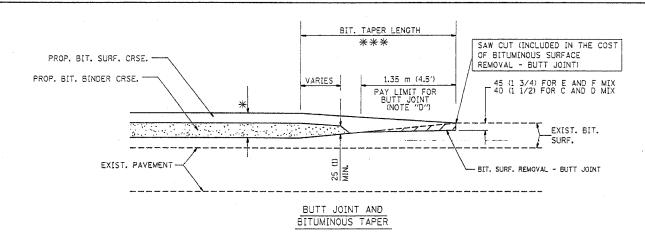


TYPICAL BUTT JOINT AND BITUMINOUS TAPER
FOR MILLING AND RESURFACING

60819



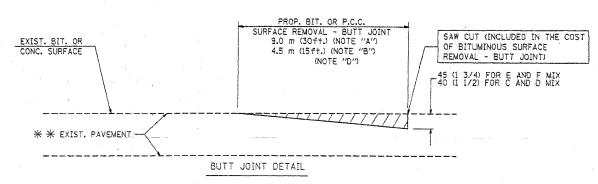

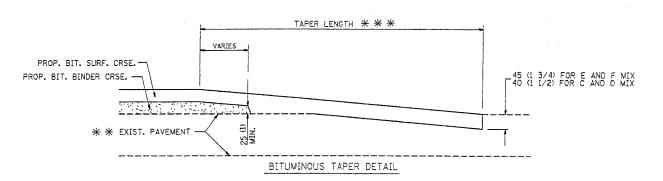

# TYPICAL BUTT JOINT AND BITUMINOUS TAPER FOR RESURFACING ONLY

 $\divideontimes$  PC CONCRETE, BITUMINOUS OR BITUMINOUS RESURFACED PAVEMENT.

#### NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.
- C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING BITUMINOUS SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED BITUMINOUS COURSES.
- E: TAPER THE TEMP. RAMP AT A RATE OF 900 (3 ft.) PER INCH OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 1.35 m (4.5') TEMP. BIT. RAMP WILL BE PAID AS "BITUMINOUS SURFACE REMOVAL BUTT JOINT".
- G: SEE ARTICLE 406.18 AND 406.24 OF THE STANDARD SPECIFICATIONS FOR "BITUMINOUS AND PCC SURFACE REMOVAL, BUTT JOINT".
- \* SEE TYPICAL SECTIONS FOR MILLING THICKNESS.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.

ILLINOIS DEPARTMENT OF TRANSPORTATION

BUTT JOINT AND BITUMINOUS TAPER DETAILS

BASIS OF PAYMENT:

THE BUTT JOINT WILL BE PAID FOR PER SQUARE METER (SQUARE YARD.)
AS "BITUMINOUS SURFACE REMOVAL - BUTT JOINT" OR
AS "PORTLAND CEMENT CONCRETE SURFACE REMOVAL - BUTT
JOINT".

09/09/94 10/25/94 03/21/97 SCALE: NON

SCALE: NONE

DATE PLOTTED: 03/08/29

E DRAWN 8Y

ED:03/08/2004 CHECKED 8Y

B0400-05 (VI=8032)

REVISION DATE: 04/06/01

03/08/2004 w:\diststd\bd32.dgn VI=BD32 GUILLAUMEFP