


COLLAR DETAIL (DIRECT PIPE CULVERT EXTENSION)

CONNECTION COLLAR CLASS SI CONCRETE

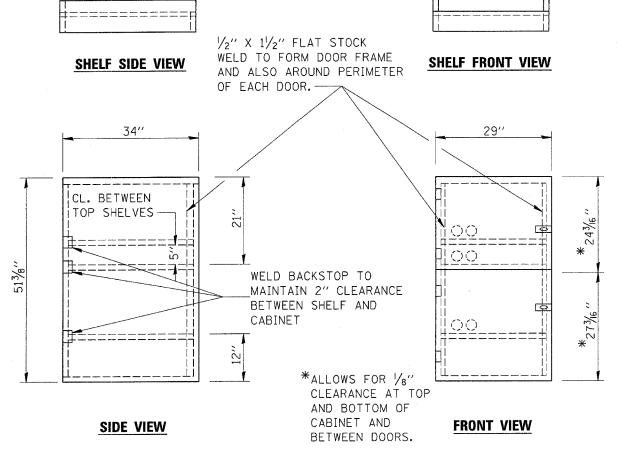

2" ACCESS HOLES IN REAR OF CABINET

NOTES: 1. USE 16 GAUGE STEEL FOR CABINET.

- 2. THE TOP SHELF SHALL SLIDE IN OR OUT WITH THE TOP DOOR OPEN.
- 3. ALL HINGES AND HASPS WILL BE WELDED TO THE CABINET.
- 4. ALL EDGES SHALL BE GROUND SMOOTH.
- 5. TWO (2" DIA.) ACCESS HOLES WILL BE REQUIRED FOR EACH SHELF.
- 6. CABINET SHALL BE PAINTED WITH TWO COATS OF FLAT PAINT.
- 7. 2 EACH MATCHING KEY PADLOCKS, WITH 3 KEYS PROVIDED, MASTER MODEL 3 T OR EQUIVALENT.
- 8 A EACH PLAIN STEEL NON-PEMOVABLE PIN NO HOLE ATTYATT

SQUARE CORNER HINGES TO BE WELDED ON.	
9. 2 EACH EXTRA HEAVY, PLAIN STEEL, FIXED STAPLE, NO HOLE, 7 1/4 " HASPS TO BE WELDED ON.	
- FLAT STOCK DIMENSIONS VARY DEPENDING ON TYPE OF ROLLER ASSEMBLY.	
LOCKABLE COMPUTER CABINET	

DATE = 4/21/2005
NAME = #FILEL\*
SCALE = \*SCALE\*
NAME = \*USER\*

**DETAILS** 

ILLINOIS DEPARTMENT OF TRANSPORTATION

SCALE: VERT.

DRAWN BY CHECKED BY