

EROSION AND SEDIMENT CONTROL NOTES:

UNLESS OTHERWISE INDICATED, ALL VEGETATIVE AND STRUCTURAL EROSION AND SEDIMENT CONTROL PRACTICES WILL BE CONSTRUCTED ACCORDING TO MINIMUM STANDARDS AND SPECIFICATIONS IN THE IDOT STANDARD SPECIFICATIONS FOR ROAD & BRIDGE CONSTRUCTION, LATEST REVISION.

A COPY OF THE APPROVED EROSION AND SEDIMENT CONTROL PLAN SHALL BE MAINTAINED ON THE SITE AT ALL TIMES.



THE CONTRACTOR IS RESPONSIBLE FOR INSTALLATION OF ANY ADDITIONAL EROSION CONTROL MEASURES NECESSARY TO PREVENT EROSION AND SEDIMENTATION AS DETERMINED BY THE ENGINEER.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR SWEEPING PUBLIC & DEVELOPMENT STREETS WHEN DEBRIS HAS BEEN TRACKED AND OR WASHED ON THEM. THE CONTRACTOR SHALL BE RESPONSIBLE TO SWEEP THE STREETS IF DIRECTED TO DO SO BY THE ENGINEER. THE CONTRACTOR IS ALSO RESPONSIBLE TO CONTROL DUST ON THE SITE IN ACCORDANCE WITH PRACTICES IN THE IDOT STANDARD SPECIFICATIONS FOR ROAD & BRIDGE CONSTRUCTION, LATEST REVISION.

EROSION FABRIC IS NECESSARY FOR SILT TRAPS INSTALLED AT ALL STORM STRUCTURES WITH OPEN LIDS. ALL STORMWATER INLETS SHALL BE PROTECTED PER THE DETAILS. AFTER EACH RAINFALL EACH INLET SHALL BE INSPECTED. ANY INLET PROTECTION THAT HAS FAILED OR IS DAMAGED SHALL BE REPAIRED AS SOON AS POSSIBLE. SEDIMENT SHALL BE REMOVED AS NECESSARY TO PROVIDE FOR THE CONTINUED EFFECTIVENESS OF THE INLET PROTECTION TECHNIQUE IN USE.

ALL EROSION AND SEDIMENT CONTROL DEVICES SHALL BE INSTALLED AND STABILIZED PRIOR TO SITE CLEARING AND GRADING. ALL EROSION AND SEDIMENT CONTROL PRACTICES SHALL BE MAINTAINED THROUGHOUT THE DURATION OF THE PROJECT. ALL EROSION AND SEDIMENT CONTROL STRUCTURES SHALL BE INSPECTED WEEKLY AND AFTER EACH 1/2" RAINFALL EVENT AND 6" SNOWFALL EVENT AND AN INSPECTION RECORD SHALL BE MAINTAINED BY THE CONTRACTOR AT THE JOB SITE FOR THE DURATION OF THE PROJECT. THE CONTRACTOR SHALL BE RESPONSIBLE TO PERFORM THESE INSPECTIONS AND TO MAINTAIN ALL EROSION AND SEDIMENT CONTROL DEVICES IN SUCH A MANNER THAT THEY CONTINUE TO FUNCTION FOR THE DURATION OF THEIR INTENDED USE. THE CONTRACTOR SHALL BE RESPONSIBLE TO PERFORM ALL TEMPORARY SEEDING.

ALL DISTURBED AREAS SHALL BE STABILIZED WITH TEMPORARY SEEDING WITHIN 14 DAYS FOLLOWING THE END OF ACTIVE CONSTRUCTION.

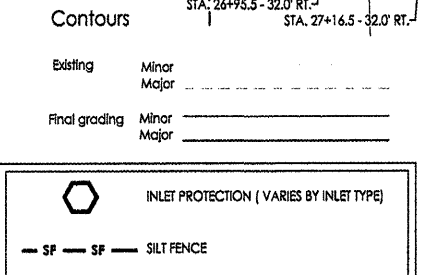

Date	Revision	By
5/12/11	REVISED PER IDOT REVIEW LETTER (DATED APRIL 27)	JAB
11/11/11	REVISED PER IDOT/FHWA MEETING (JULY 20, 2011)	JAB
2/08/12	REVISED PER IDOT REVIEW LETTER (DATED JANUARY 19, 2012)	JAB
2/24/12	REVISED PER IDOT E-MAILS (FEBRUARY 15 & 18, 2012)	JAB

**Safe Routes to School
Grading & Storm Water Pollution Prevention Plan**

CHECKED BY: KCB DATE: 02/18/11	DRAWN BY: JAB DATE: 02/18/11	Sheet 10 of 15
-----------------------------------	---------------------------------	-------------------

3000_BASE.dwg