



PAVEMENT MARKINGS AT RAILROAD-HIGHWAY GRADE CROSSING



* MINIMUM DISTANCE
 400' FOR 55 MPH
 250' FOR 45 MPH
 100' FOR 35 MPH OR LESS


NOTES:
 THE TRANSVERSE SPREAD OF THE "X"
 MAY VARY ACCORDING TO LANE WIDTH.
 ON MULTI-LANE ROADS, THE STOP LINES
 SHALL EXTEND ACROSS ALL APPROACH
 LANES AND SEPARATE RXR SYMBOLS SHALL
 BE PLACED ADJACENT TO EACH OTHER
 IN EACH LANE.

WHEN THE PAVEMENT MARKING SYMBOL
 IS USED, A PORTION OF THE SYMBOL
 SHOULD BE LOCATED DIRECTLY ADJACENT
 TO THE ADVANCE WARNING SIGN (W10-1).

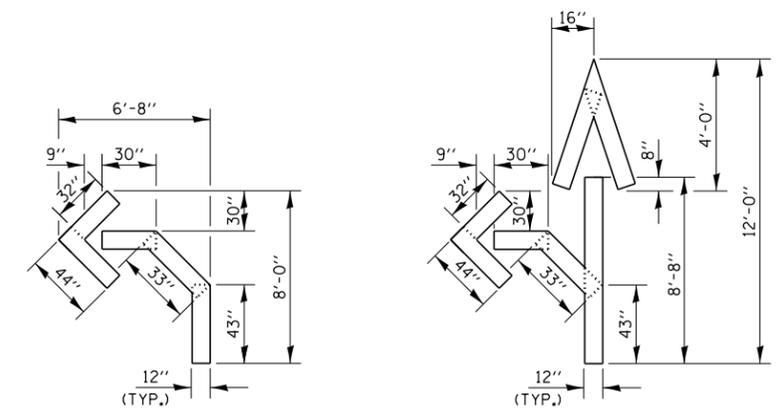


QUANTITY
 12" LINE = 16 LIN. FT.
 OR 4" LINE = 48 LIN. FT.

QUANTITY
 12" LINE = 29 LIN. FT.
 OR 4" LINE = 87 LIN. FT.

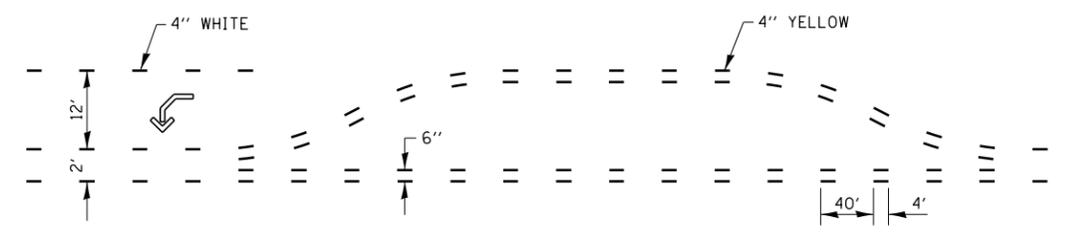

SHORT-TERM PAVEMENT MARKING FOR MEDIANS AND ARROWS

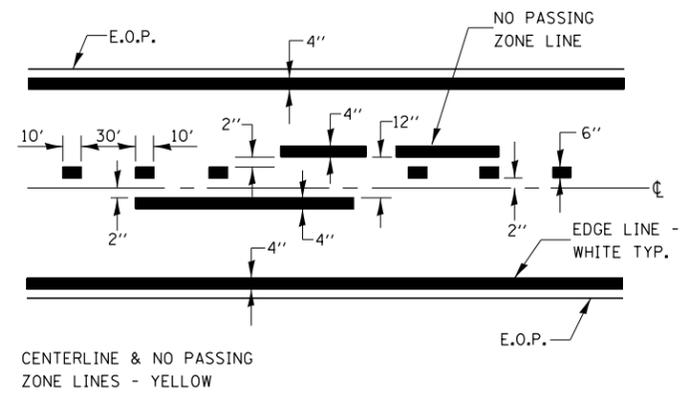

PAVEMENT MARKING

FILE NAME =	USER NAME = carpenterdj	DESIGNED -	REVISED -
c:\pwork\work\pwork\carpenterdj\d0119037\0366429-details.dgn		DRAWN -	REVISED -
	PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
MODELNAME	PLOT DATE = 6/11/2014	DATE -	REVISED -

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

DETAILS			
SCALE:	SHEET	OF SHEETS	STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
840	(140)RS-7 & (141)RS-4	KANKAKEE	13	11
CONTRACT NO. 66429				
ILLINOIS FED. AID PROJECT				