



MIXTURES TABLE

	POLY HMA SURFACE	POLY HMA BINDER	HMA SHOULDERS 4" FOR STAGING	HMA SHLDS 6"	HMA SHLDS 6" FOR GUARDRAIL STABILIZATION	HMA SHOULDERS 1 1/2" FOR FINAL LIFT
PG GRADE	SBS-PG70-22	SBS-PG70-22	PG64-22	PG64-22	PG64-22	PG64-22
DESIGN AIR VOIDS	4.0% @ N90	4.0% @ N90	4.0% @ N70	4.0% @ N70	2.0% @ N30	4.0% @ N70
MIXTURE COMPOSITION	IL 9.5	IL 19.0 FG	IL 19.0 FG	IL 19.0 FG	IL 19.0L	IL 9.5
FRICTION AGGREGATE	MIXTURE D					MIXTURE C
DENSITY TEST METHOD	PFP	PFP	CORES/ CORRELATION	CORES/ CORRELATION	SATISFACTION OF ENGINEER	CORRELATION

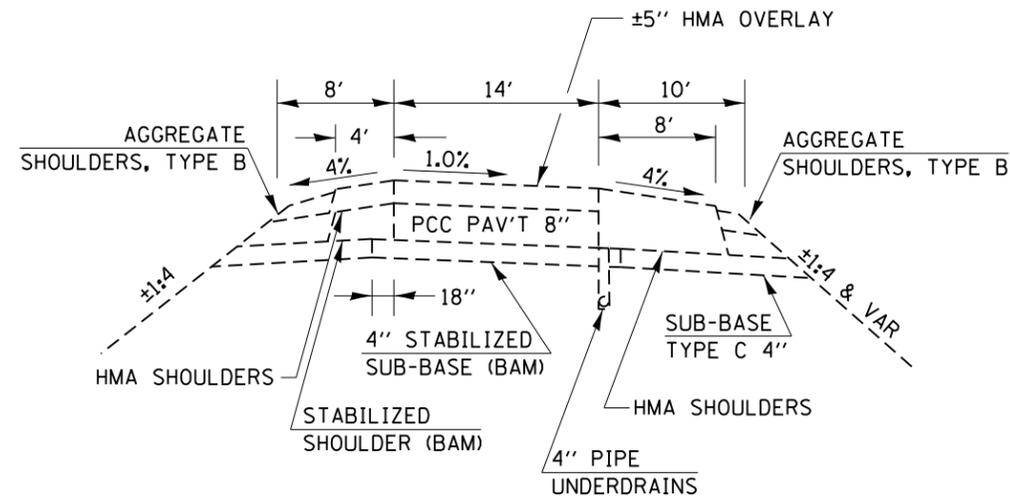


EXISTING TYPICAL SECTION

RAMPS

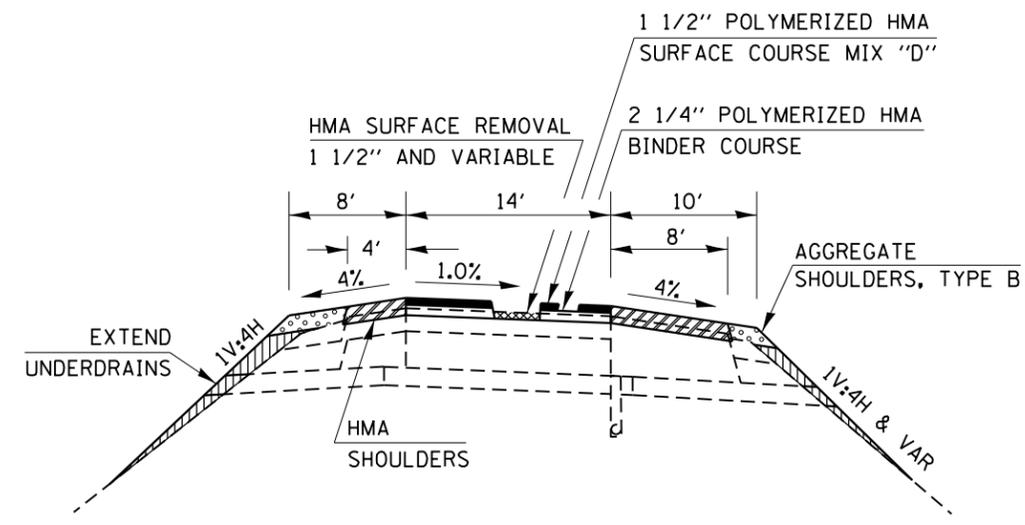

PROPOSED TYPICAL SECTION

RAMPS

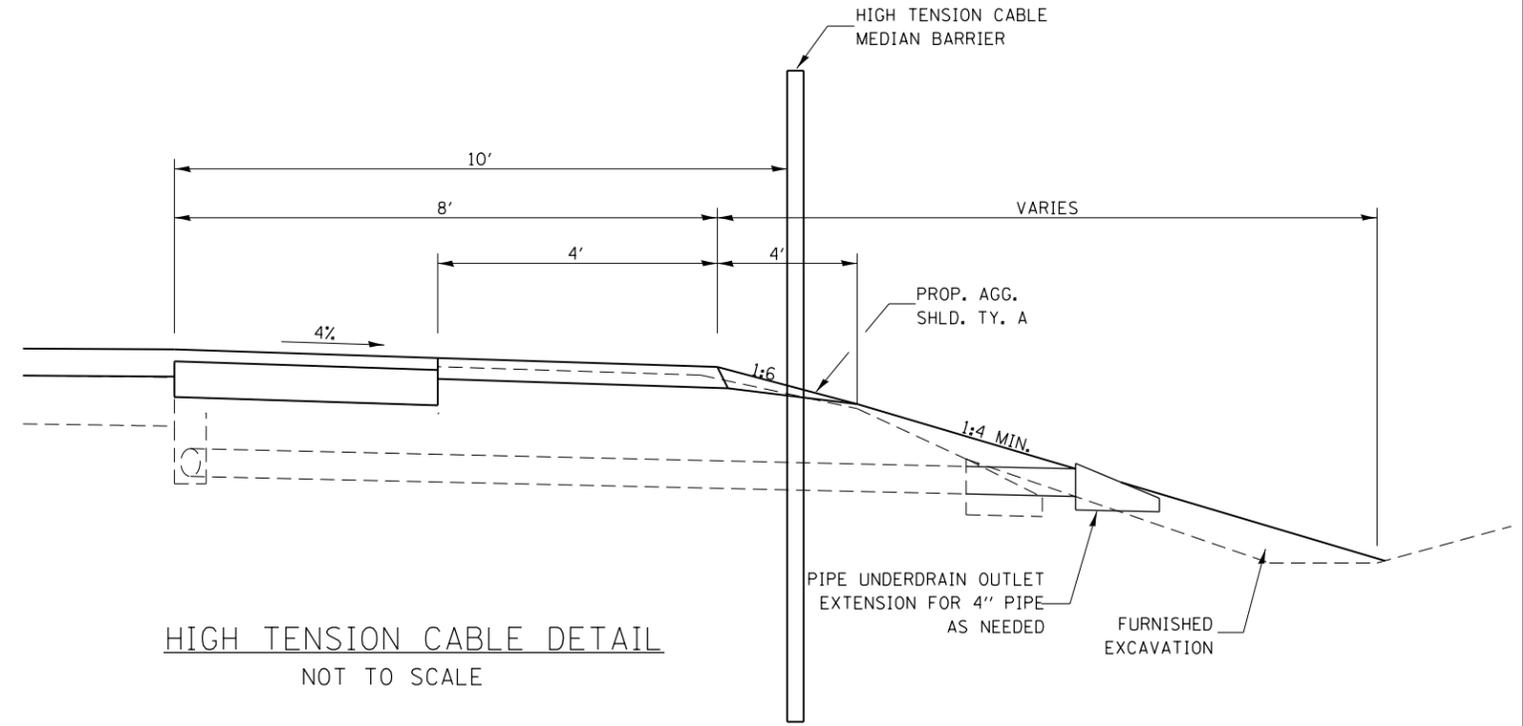

HIGH TENSION CABLE DETAIL
NOT TO SCALE

NOTES

- SEVERAL LOCATIONS MAY REQUIRE ADDITIONAL FILL TO PROVIDE A MINIMUM 1:4 FORESLOPE. THIS MATERIAL WILL BE PAID FOR AS "FURNISHED EXCAVATION".
- EXISTING PIPE UNDERDRAIN STRUCTURES MAY NEED TO BE ADJUSTED TO MATCH THE PROPOSED SLOPE, AND WILL BE PAID AS "PIPE UNDERDRAIN OUTLET EXTENSION FOR 4" PIPE".