



LOOP:	SIZE:	MODE:	QUADRA-POLE:	DELAY:
D1,D2,D3	6' X 6'	NORMAL	NO	0
D4,D5	6' X 8'	DELAY	NO	15
D6	6' X 8'	EXTENDED	NO	0

THE FOLLOWING CABLES SHALL BE WIRED TO COMMON AMPLIFIERS:  
(D1,D2,D3),(D4,D5),(D6)

NUMBER OF TURNS REQUIRED  
IN DETECTOR LOOPS

6 X 6		LOOP SIZE
		2 TURNS
0	545	3 TURNS
546	818	4 TURNS
819	1145	5 TURNS
1146	1527	6 TURNS
1528	1964	7 TURNS
1965	2455	8 TURNS
2456	3000	9 TURNS
		10 TURNS

THE NUMBERS IN THE TABLE REPRESENT THE LENGTH OF ELECTRIC CABLE FROM THE LOOP TO THE CABINET

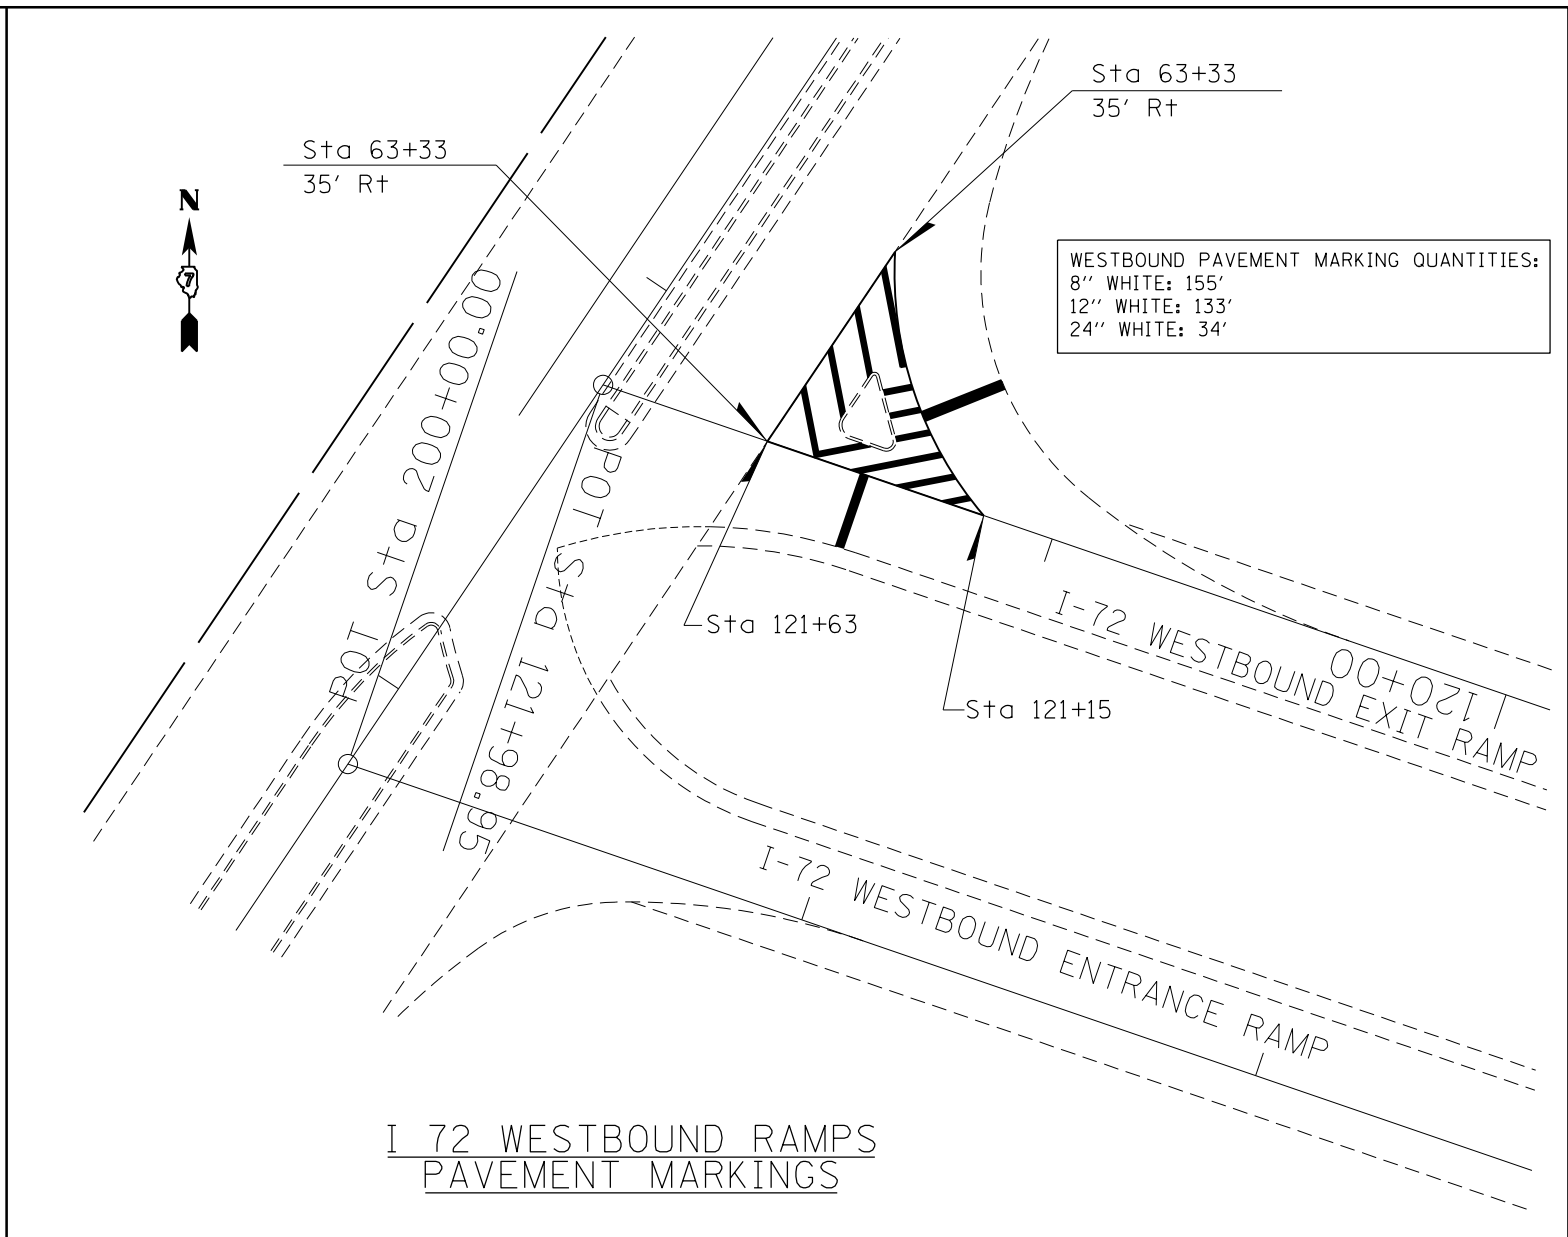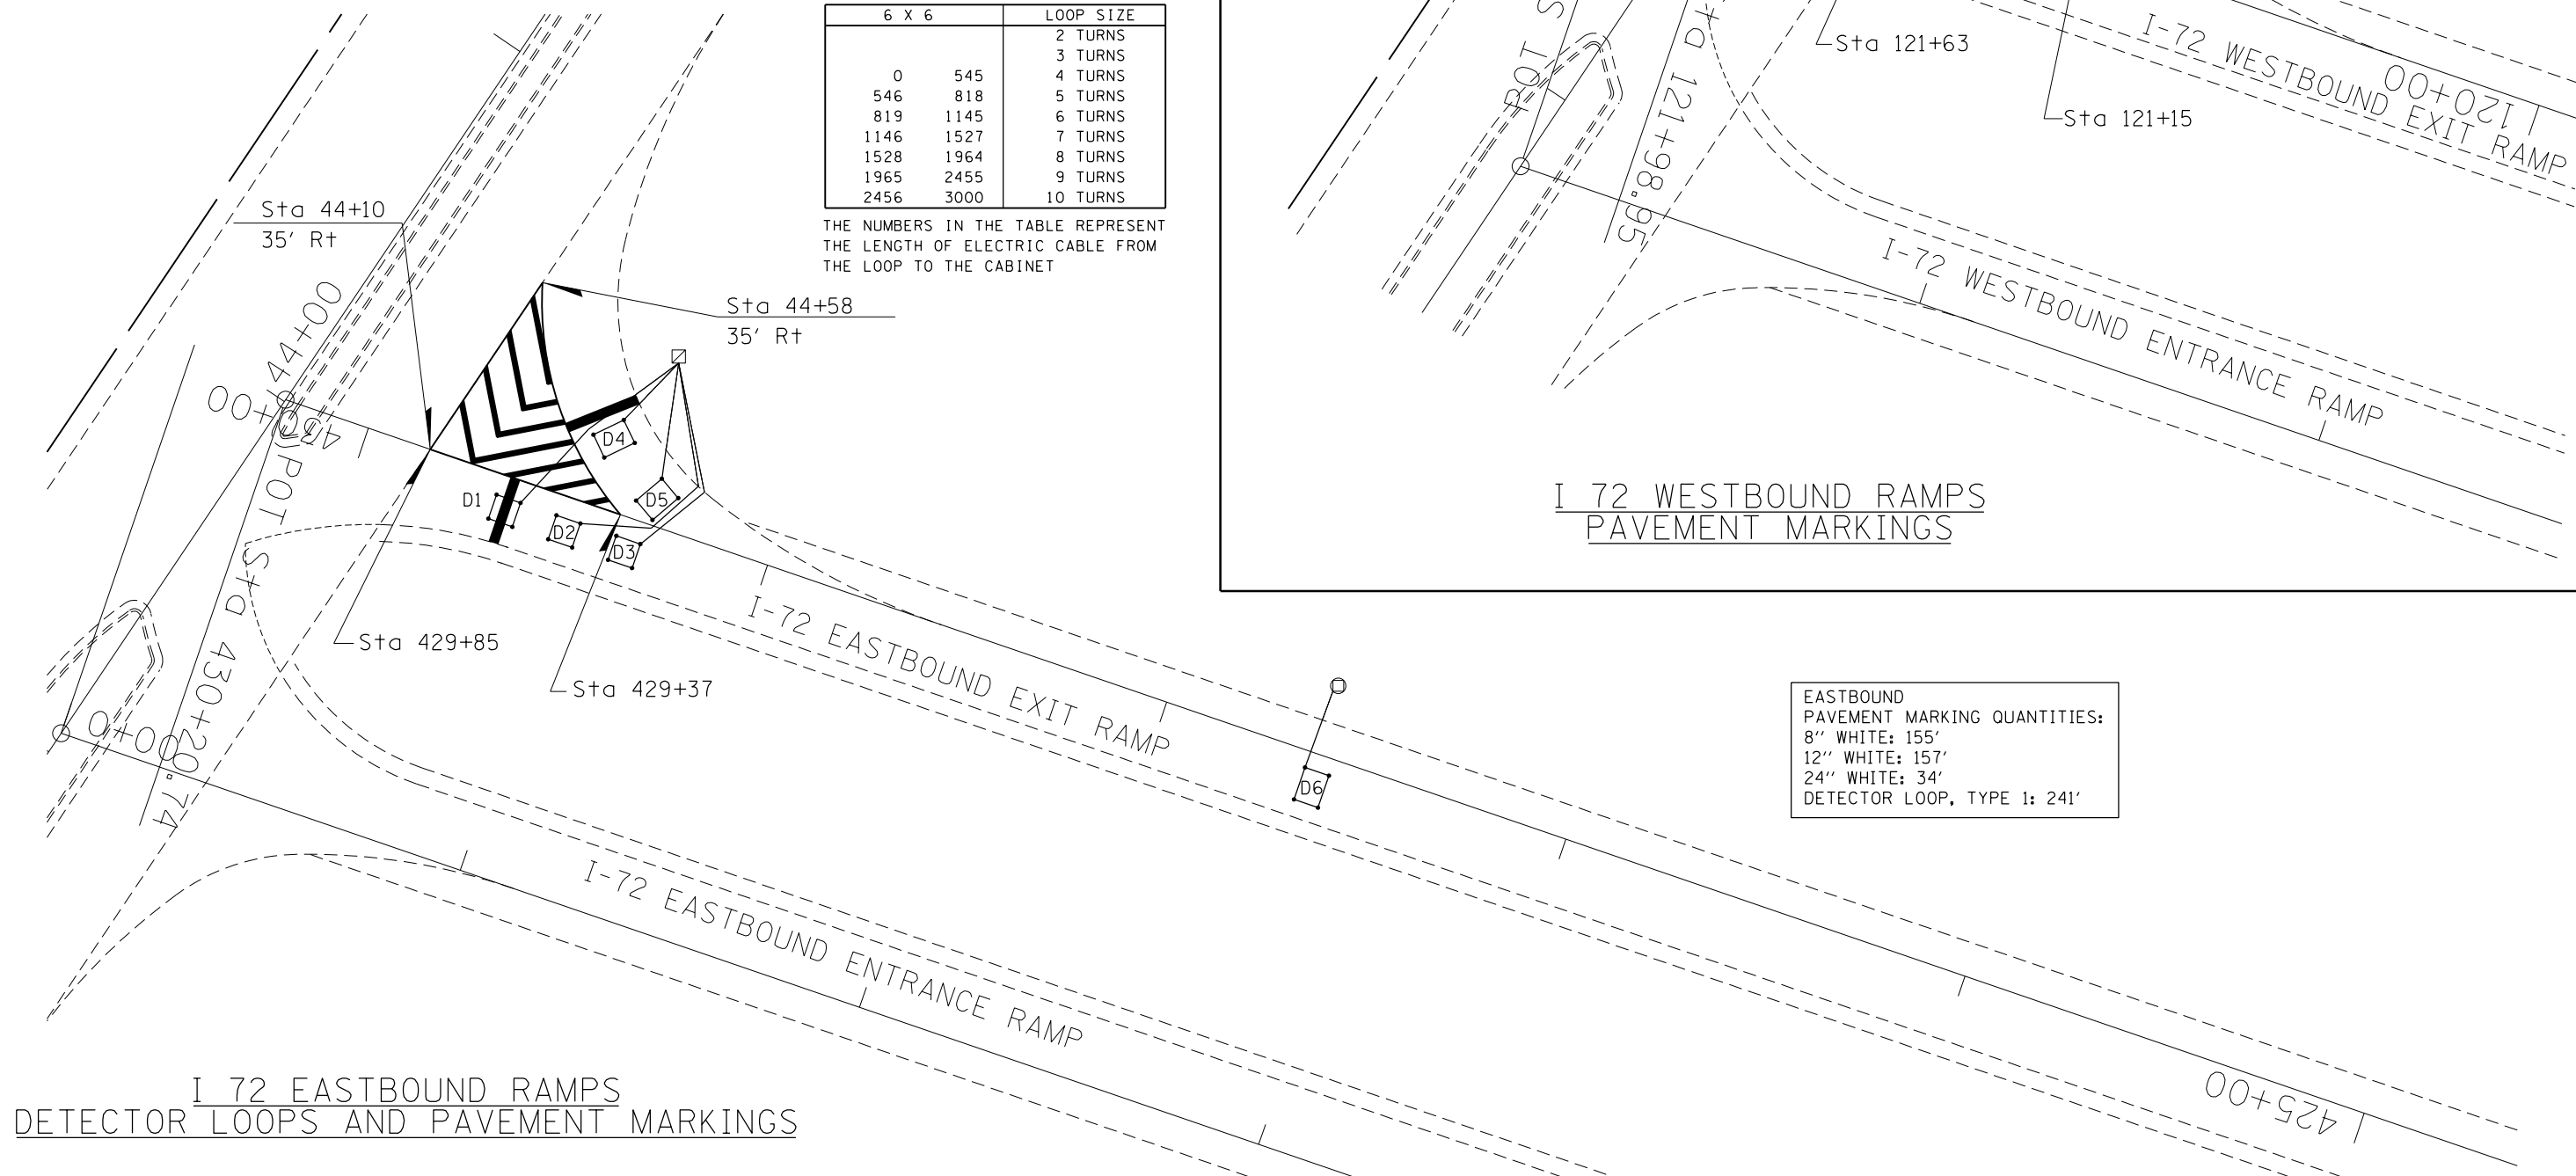

I 72 EASTBOUND RAMPS  
DETECTOR LOOPS AND PAVEMENT MARKINGS

EASTBOUND  
PAVEMENT MARKING QUANTITIES:  
8" WHITE: 155'  
12" WHITE: 157'  
24" WHITE: 34'  
DETECTOR LOOP, TYPE 1: 241'