




*** REDUCE TO 40' (12 m) O.C. ON CURVES WITH POSTED OR ADVISORY SPEED 45 M.P.H. (70 km/h) OR LESS.

TWO-LANE/TWO-WAY

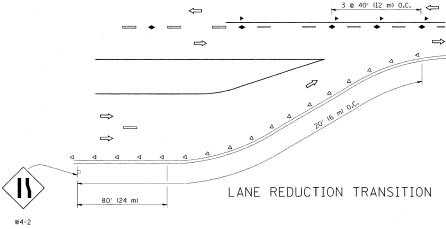




TWO-WAY LEFT TURN

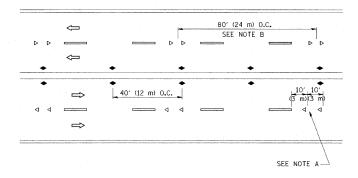

MULTI-LANE/UNDIVIDED

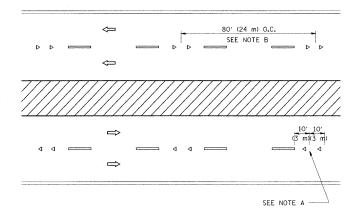

MULTI-LANE/DIVIDED

GENERAL NOTES

- MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- 2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

LANE MARKER NOTES

- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.
- B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.

SYMBOLS

- ---- YELLOW STRIPE
- WHITE STRIPE
- ONE-WAY AMBER MARKER
- ONE-WAY CRYSTAL MARKER (₩/0)
- ◆ TWO-WAY AMBER MARKER

DESIGN NOTES

- 1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE LINES.
- 3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN THE PLANS.
- MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

SEE TWO-LANE/TWO-WAY WHERE MARKERS CONTINUE ** WHERE THE MEDIAN WIDTH IS 6' (2 m) OR LESS ** WINIMUM OF 3 W EQUALLY SPACED ** BO' (24 m) O.C. ** SEE TWO-LANE/TWO-WAY WHERE MARKERS CONTINUE ** WHERE THE MEDIAN WIDTH IS 6' (2 m) OR LESS USE TWO-WAY MARKERS.

LEFT TURN

All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = drivakosgn	DESIGNED -	REVISED	T. RAMMACHER 09-19-94
c:\pw_work\pwidot\drivakosgn\d0108315\tc	II.dgn	DRAWN -	REVISED	-T. RAMMACHER 03-12-99
	PLDT SCALE = 50.000 '/ IN.	CHECKED -	REVISED	-T. RAMMACHER 01-06-00
	PLOT DATE = 9/9/2009	DATE -	REVISED	- C. JUCIUS 09-09-09

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

	TYPICAL APPLICATIONS							
	RAISED	REFLECTIVE	PAVEMENT	MARKERS	(SNOW-PLOW	RESISTANT)		
SCALE:	NONE	SHEET NO	. 1 OF 1	SHEETS :	STA.	TO STA.		