
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

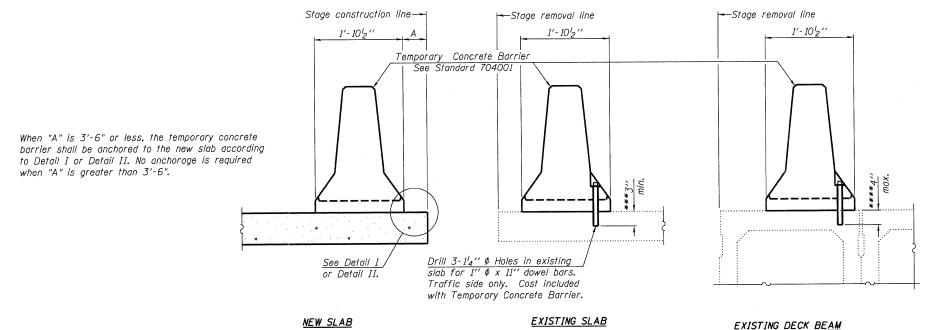

NOTES

Detail I - With Bar Splicer or Couplers: Connect one (1) 1"x7"x10" steel P to the top layer of couplers with 2-58" ♦ bolts screwed to coupler at approximate © of each barrier panel.


Detail II - With Extended Reinforcement Bars: Connect one (I) 1"x7"x 10" steel P_c to the concrete slab or concrete wearing surface with 2-5g" ϕ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate & of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier. The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

SECTIONS THRU SLAB OR DECK BEAM


- *** Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.
- **** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

-Extended #5 bars

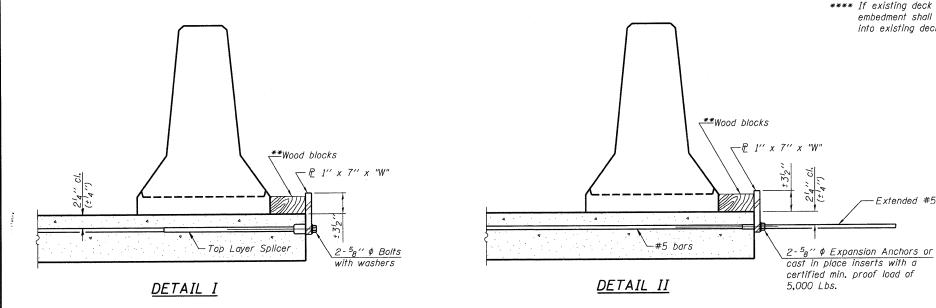

R-27

7-1-10

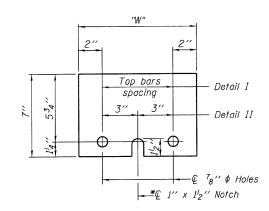

STEEL RETAINER & 1" x 7" x 10"

* Required only with Detail II

TEMPORARY CONCRETE BARRIER STRUCTURE NO. 016-2119

DESIGNED EV CHECKED PC PSTEIN DRAWN JCP CHECKED JPO CHICAGO, ILLINOIS 60661-1259

with the steel retainer plate.

"W" = Top bars spacing + 4"

** Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact

EIN	SHEET	NO. S46	F.A.I. RTE.	SECT	ΓΙΟΝ		COUNTY	TOTAL SHEETS	SHEE NO.
			94	1314	B-1		COOK	110	82
TEL 312 454 9100 FAX 312 559 1217 www.epsteinglobal.com	S52	SHEETS					CONTRACT	NO. 60)F65
			ILLINOIS FED. AID PROJECT						