STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

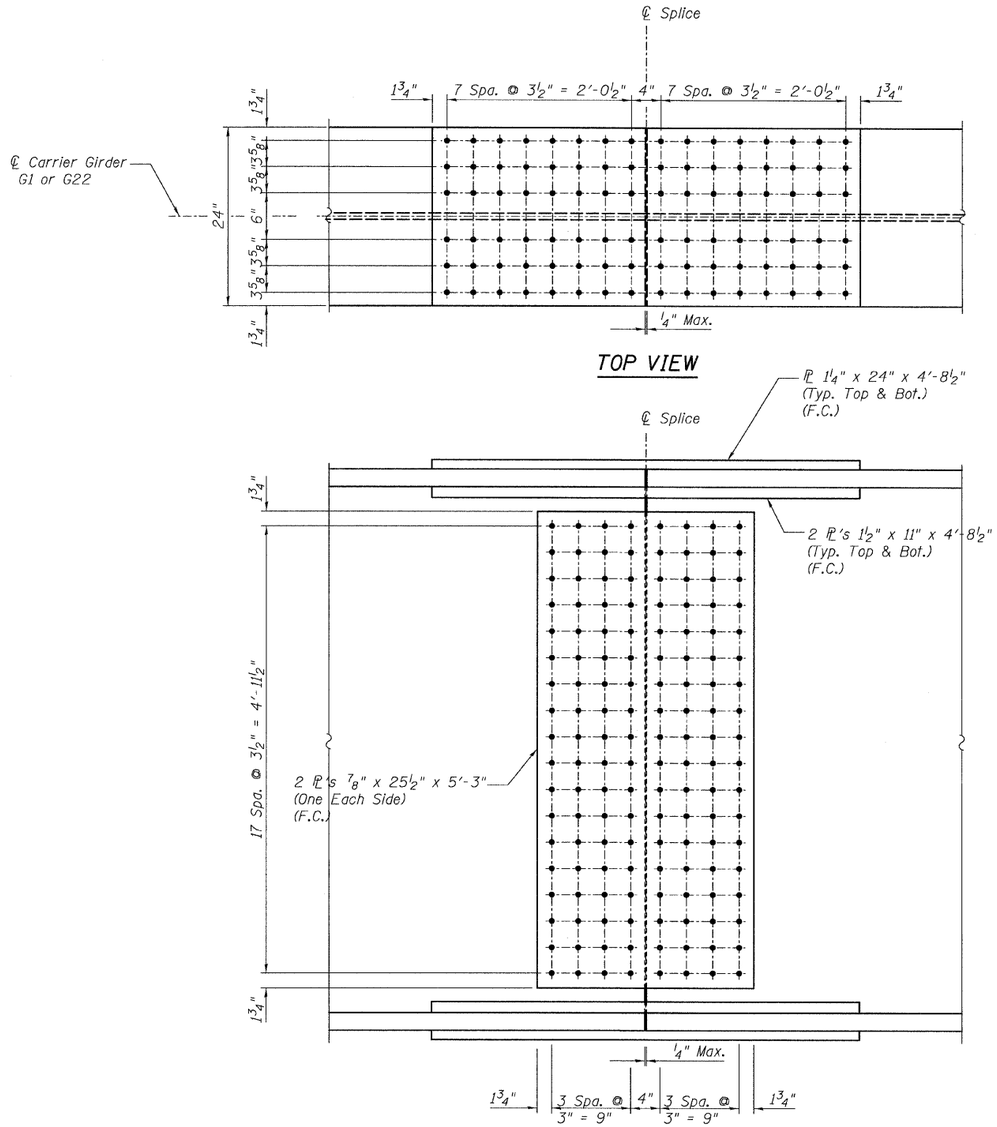

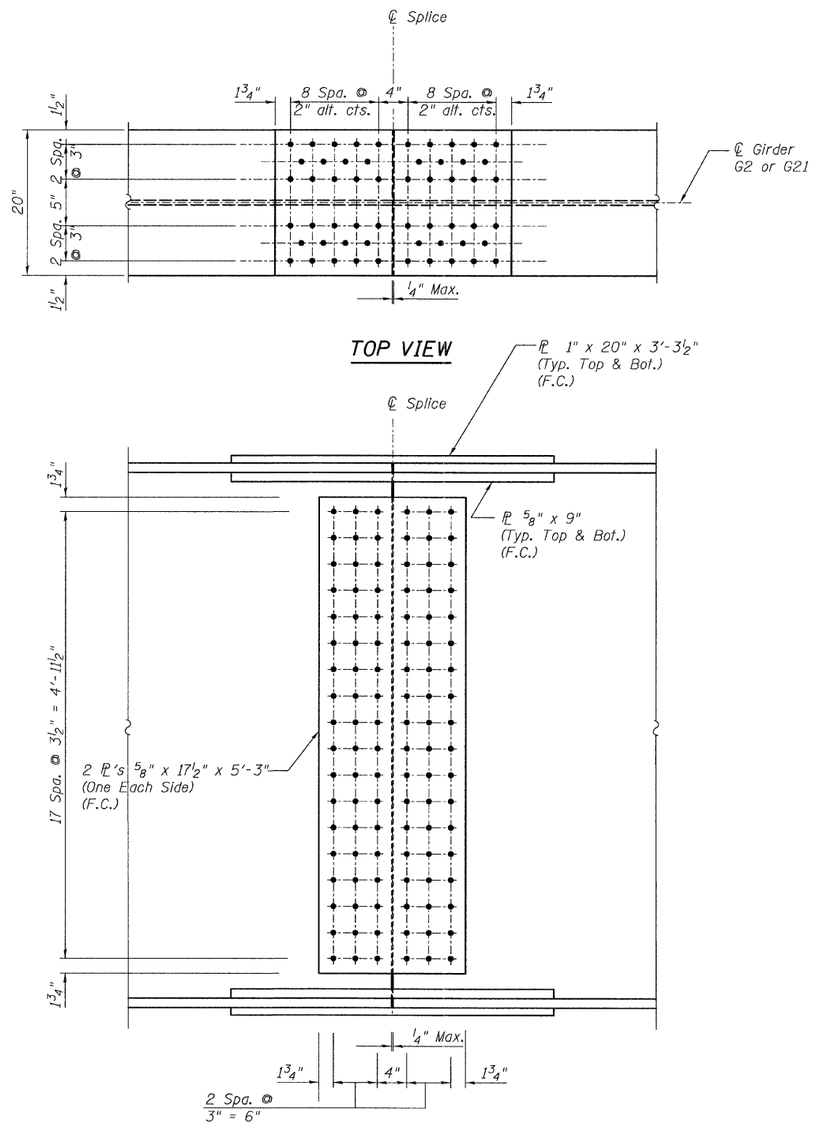

NOTES:

1. All splice materials to be AASHTO M 270 Grade 50.
2. All bolts shall be 1" ϕ with 1 1/16" ϕ holes for G1 and G22 Field Splices and ⅞" ϕ with 15/16" ϕ holes for G2 and G21 Field Splices.
3. F.C. denotes fracture critical material, AASHTO Zone II.

FIELD SPLICES
CENTRAL / I-55
STRUCTURE NO. 016-0724

TYLIN INTERNATIONAL

DESIGNED	JMA
CHECKED	AMD,
DRAWN	JMA
CHECKED	AMD,
DATE	08/02/10

REVISIONS	
NAME	DATE

SHEET NO. 52
137 SHEETS

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
55	0711.2R & 1011.1BR	COOK	200	82
		CONTRACT NO. 60L39		
FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT		

8/5/2010

p:\01345\beam and bearing fabrication\I55c2frame1t11.dgn 2:42:12 PM