



(FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW)

### OPTION 1

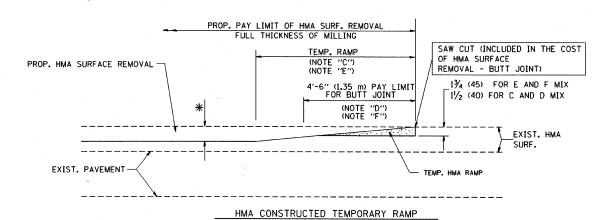

# OPTION 2 TYPICAL TEMPORARY RAMP

(FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW)

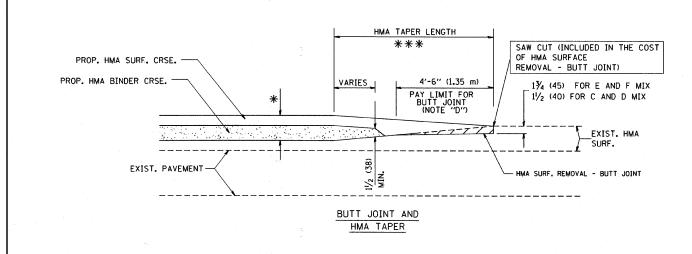

## TYPICAL BUTT JOINT AND HMA TAPER FOR MILLING AND RESURFACING


FILE NAME = USER NAME = geglionobt DESIGNED - M. DE YONG REVISED - R. SHAH 10-25-94
Wi\distatd\22x34\bd32.dgn DRAWN - REVISED - A. ABBAS 03-21-97
PLOT SCALE = 58.8000 '/ IN. CHECKED - REVISED - M. GOMEZ 04-06-01
PLOT DATE = 1/4/2008 DATE - 06-13-90 REVISED - R. BORO 01-01-07

PROP. HMA OR PCC
SURFACE REMOVAL - BUTT JOINT
30'-0" (9.0 m) (NOTE "A")
15'-0" (4.5 m) (NOTE "B")

(NOTE "D")

\*\* \* EXIST. PAVEMENT

BUTT JOINT DETAIL

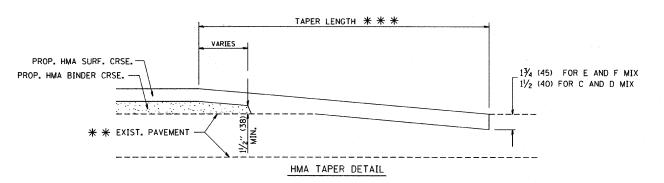

### TYPICAL BUTT JOINT AND HMA TAPER FOR RESURFACING ONLY

\* \* PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.

#### NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.
- C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
- E: TAPER THE TEMP. RAMP AT A RATE OF 3'-0" (900 mm) PER 1 INCH (25 mm) OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 4'-6" (1.35 m) TEMP. RAMP IS INCLUDED IN COST OF HMA SURFACE REMOVAL BUTT JOINT
- G: SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".
- \* SEE TYPICAL SECTIONS FOR MILLING THICKNESS.

### BASIS OF PAYMENT:

THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD (SQUARE METER)
FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL- BUTT JOINT".

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN,

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	BUTT JOINT AND							SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	HMA TAPER DETAILS						2552	10-00148-00-RS BD400-05 BD32	DuPAGE CONTRACT	24 NO. 63	18 3506
	SCALE: NONE	SHEET NO. 1	OF 1	SHEETS	STA.	TO STA.	FED. RO	DAD DIST. NO. 1 ILLINOIS FED.		NO, O	500