
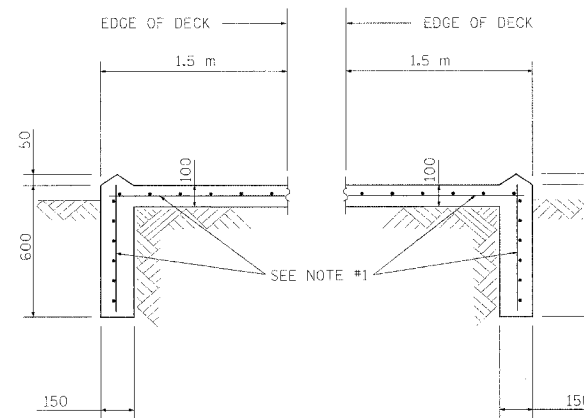
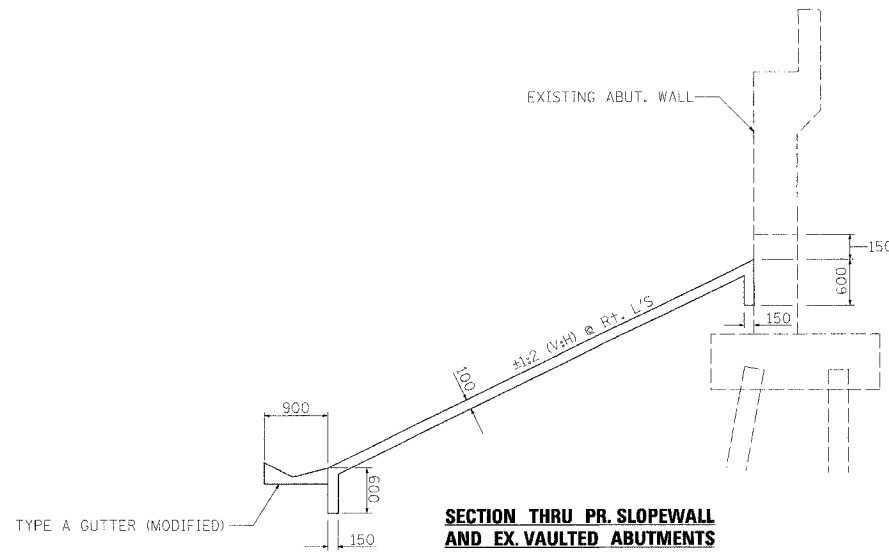


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
74	(72-7)R-3	PEORIA	1360	1007
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		

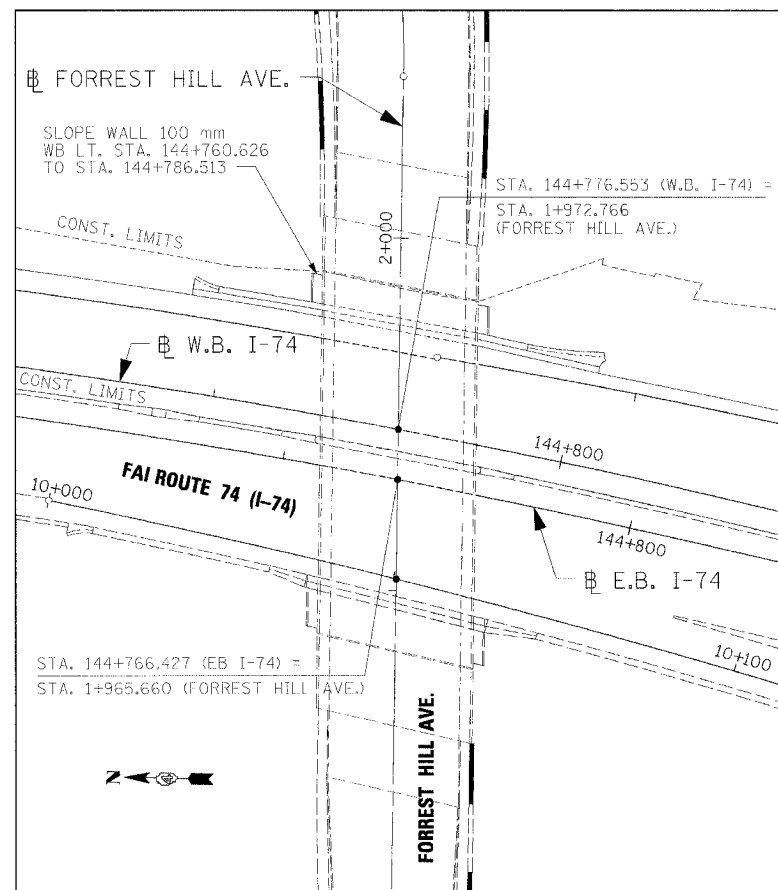

BILL OF MATERIAL

ITEM	UNIT	QUANTITY
SLOPE WALL 100 MM	M2	174

- NOTES:
- SLOPE WALL SHALL BE REINFORCED WITH WELDED WIRE FABRIC, 152 X 152 - MW25.8 X MW25.8, WITH A MASS OF 2.91 KG/M2. (COST INCLUDED WITH SLOPE WALL 100 MM)
 - ALL DIMENSIONS ARE IN MILLIMETERS (MM) UNLESS OTHERWISE NOTED.
 - SEE THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION FOR ADDITIONAL SLOPE WALL INFORMATION.

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION
NAME	DATE	
		<p>FORREST HILL AVENUE SLOPE WALL 100 MM DETAIL SHEET</p> <p>DRAWN BY CAM CHECKED BY ROY</p> <p>DATE 11/23/04</p>

