


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
74	*	PEORIA	1360	1009
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

72(7,8,9,9-1R-2

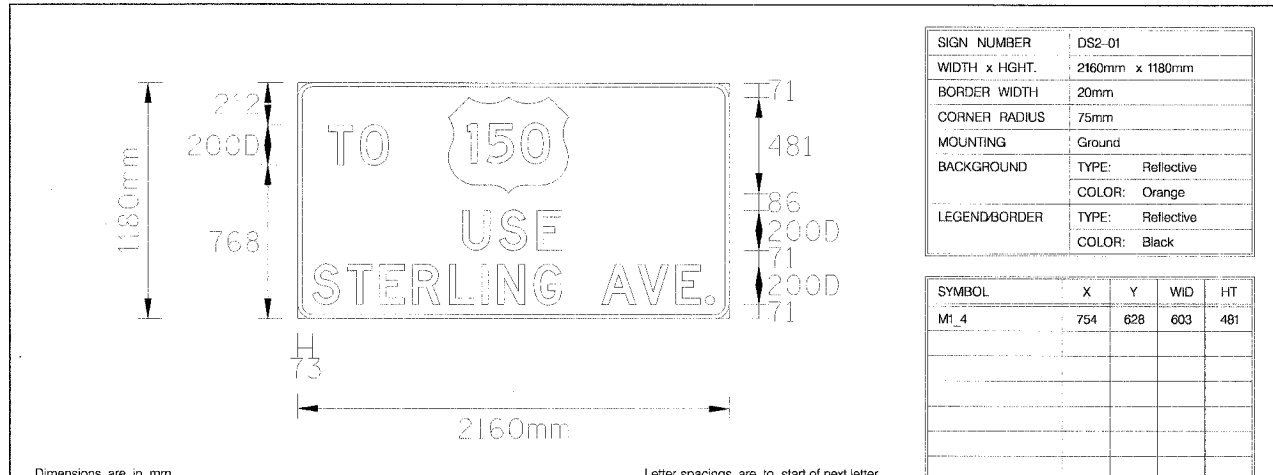


SIGN NUMBER	DS2-01
WIDTH x HGHT.	2160mm x 1180mm
BORDER WIDTH	20mm
CORNER RADIUS	75mm
MOUNTING	Ground
BACKGROUND	TYPE: Reflective COLOR: Orange
LEGEND/BORDER	TYPE: Reflective COLOR: Black

SYMBOL	X	Y	WID	HT
M1.4	754	628	603	481

Dimensions are in mm Letter spacings are to start of next letter

LETTER POSITIONS (X)													LENGTH	SERIES SIZE						
	T	O																		
151	161	143	1705													304	D200			
	U	S	E																	
825	184	186	124	841														494	D200	
	S	T	E	R	L	I	N	G	A	V	E									
73	174	162	162	186	162	80	184	138	200	182	190	149	45	73					2014	D200

DS2-01
TEMPORARY SIGN PANEL ASSEMBLY, 2.55 SQ M.
WB LT. STA. 144+795.000.

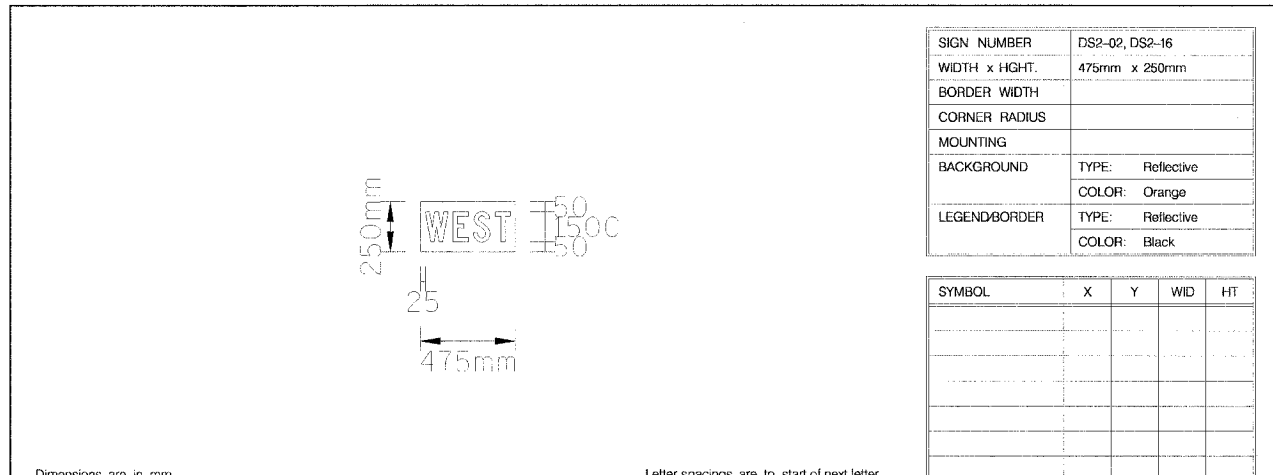

SIGN NUMBER	DS2-02, DS2-16
WIDTH x HGHT.	475mm x 250mm
BORDER WIDTH	
CORNER RADIUS	
MOUNTING	
BACKGROUND	TYPE: Reflective COLOR: Orange
LEGEND/BORDER	TYPE: Reflective COLOR: Black


SYMBOL	X	Y	WID	HT

Dimensions are in mm Letter spacings are to start of next letter

LETTER POSITIONS (X)						LENGTH	SERIES SIZE	
	W	E	S	T				
25	138	102	110	76	24		426	C150

DS2-02
COMPOSITE TEMPORARY SIGN OVERLAY, 0.12 SQ M.
GALE AVENUE RT. 99+575.000.

DS2-16
COMPOSITE TEMPORARY SIGN OVERLAY, 0.12 SQ M.
GALE AVENUE LT. 100+470.000.

 CLARK ENGINEERS, INC.	REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION SIGN PANEL DETAILS DRAWN BY RDY CHECKED BY LSA DATE 11/23/04
	NAME	DATE	