

*** REDUCE TO 40' 112 m) 0.C. ON CURVES WITH POSTED OR ADVISORY SPEED 45 M.P.H. 170 km/hl 0R LESS.

TWO-LANE/TWO-WAY

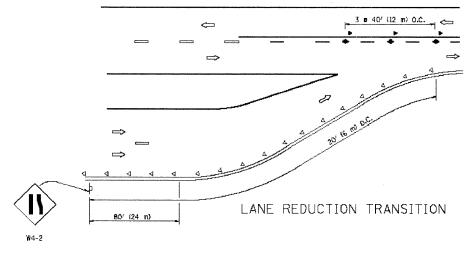

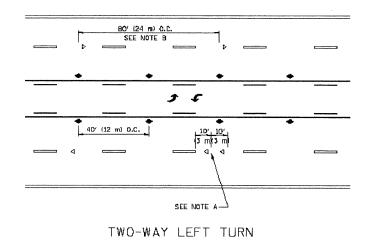

BC' (24 m) O.C.


SEE NOTE B

40' (12 m) O.C.

B mils m

SEE NOTE A

MULTI-LANE/UNDIVIDED

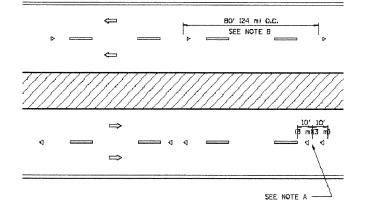

MULTI-LANE/DIVIDED

GENERAL NOTES

- MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- 2. MARKERS USED ADJACENT TO SQLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- MARKERS THROUGH TANGENTS LESS THAN SOO' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

LANE MARKER NOTES

B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 MLP.H (20 km/h) LOWER THAN POSTED SPEEDS.

A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.

SYMBOLS


- YELLOW STRIPE

WHITE STRIPE

- ◆ ONE-WAY AMBER MARKER
- ONE-WAY CRYSTAL MARKER (W/O)
- ◆ TWO-WAY AMBER MARKER

DESIGN NOTES

- 1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE LINES.
- 3, THE EXACT MARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN THE PLANS.
- MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

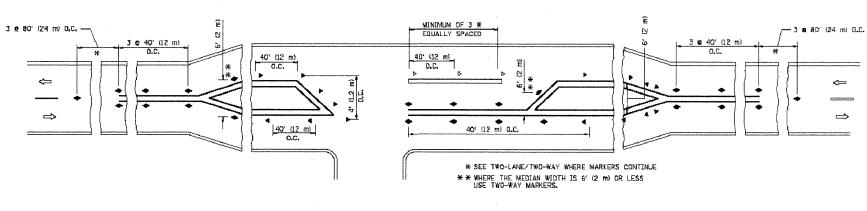

LEFT TURN

All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME = USER NAME = gegliendbt DESIGNED -REVISED - T. RAMMACHER 09-19-94 TOTAL SHEET SHEETS NO. 14 12 SECTION COUNTY TYPICAL APPLICATIONS Wi\dsetatd\22x34\tall.dgn DRAWN REVISED -T. RAMMACHER 03-12-99 STATE OF ILLINOIS 2729 09-00056-00-RS соок RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT) PLOT SCALE = 60.000 '/ IN. CHECKED -REVISED -T. RAMMACHER 01-06-00 **DEPARTMENT OF TRANSPORTATION** TC-11 CONTRACT NO. 63256 PLOT DATE = 1/4/2008 DATE REVISED -SHEET NO. 1 OF 1 SHEETS STA. FEO. ROAD DIST. NO. 1 | ILLINOIS | FED. AID PROJECT ARA-9003 (349)

E.H.E. PROJECT NO. 612-09-10101