

ROUTE NO.	SECTION 03-08111-00-BR	SHEET NO.	2
COUNTY	OGLE	JOB NO.	10
PROJECT	BR05-14160		

**GENERAL NOTES**

Existing Structures (Including Foundations, Walls, Cisterns, Wells Or Other Underground Structures) Within The Right Of Way Shall Be Removed In Accordance With Article 501.02 And 501.03 Of The Standard Specifications, Without Additional Compensation, Unless Otherwise Noted In The Plans Or Special Provisions.

The Contractor Shall Seed All Disturbed Areas Within The Project Limits.

No Overhaul Has Been Computed And None Shall Be Paid For From Any Source.

The Final Top Four Inches Of Soil In Any Right-Of-Way Area Disturbed By The Contractor Must Be A Cohesive Soil Capable Of Supporting Vegetation.

The New Number For This Structure Will Be S.N. 071-332B

The Contractor Shall Be Responsible For Protecting Utility Property During Construction Operations As Outlined In Article 107.31 Of The Standard Specifications.

The Utilities Located Within The Project Limits Or Immediately Adjacent To The Project Construction Limits Include:

COMED      NICOR      Gallatin River Communications      Insight Communications  
 123 Energy Ave.      4651 Linden Road.      2296 N. Henderson St.      115 N. Galena Ave.  
 Rockford, IL 61109      Rockford, IL 61109      Galesburg, IL 61401      Dixon, IL 61021

A Minimum Of 48 Hours Advance Notice Is Required For Non-Emergency Work.

A Nationwide 404 Permit Has Been Issued For This Project And The Conditions Of That Permit Must Be Adhered To.




When Mulch With Emulsified Asphalt Is Applied, It Will Be The Contractor's Responsibility To Cover Or Protect All Traffic Signs, Guardrail And Curbs. Any Signs, Guardrail Or Curbs Which Become Covered With Asphaltic Material Shall Be Cleaned By The Contractor At His Own Expense.

Where Section Or Subsection Monuments Are Encountered, The Engineer Shall Be Notified Before Such Monuments Are Removed. The Contractor Shall Protect And Carefully Preserve All Property Markers, Monuments And Right-Of-Way Pins Until The Owner, An Authorized Surveyor, Or Agent Has Witnessed Or Otherwise Referenced Their Location.


Existing Mail Boxes, Street Signs And Traffic Signs That Are Within The Construction Limits Shall Be Removed And Reset By The Contractor. Cost Of Removing And Resetting To Be Included In The Contract Unit Price Bid Per Cubic Yard For Earth Excavation.

**SCHEDULE OF QUANTITIES**

AGGREGATE SURFACE COURSE, TYPE B		
LOCATION	TON	REMARKS
STA. 6+50 - STA. 8+11	72	4" DEPTH, TAPER
STA. 8+11 - STA. 9+81	94	4" DEPTH
STA. 10+19 - STA. 12+00	89	4" DEPTH, TAPER
F.E.L. STA. 9+26	16	8" DEPTH
F.E.R. STA. 8+74	14	8" DEPTH
<b>TOTAL</b>	<b>285 TON</b>	
AGGREGATE BASE COURSE, TYPE B		
LOCATION	TON	REMARKS
STA. 6+50 - STA. 8+11	143	8" DEPTH, TAPER
STA. 8+11 - STA. 9+81	189	8" DEPTH
STA. 10+19 - STA. 12+00	178	8" DEPTH, TAPER
<b>TOTAL</b>	<b>510 TON</b>	
SEEDING CLASS II, (SPECIAL)		
LOCATION	ACRES	REMARKS
LT. & RT. STA. 6+50 - STA. 12+00	0.40	
<b>TOTAL</b>	<b>0.40 ACRES</b>	
EROSION CONTROL BLANKET		
LOCATION	SQ YD	REMARKS
LT. & RT. STA. 9+66 - STA. 9+85	53	AROUND WINGWALLS
LT. & RT. STA. 10+15 - STA. 10+35	76	AROUND WINGWALLS
<b>TOTAL</b>	<b>129 SQ YD</b>	
TREE REMOVAL (6 TO 15 UNITS DIAMETER)		
LOCATION	UNITS	REMARKS
LT. STA. 6+77	24	10 1/4", 10 10"
LT. STA. 6+93	10	10 10"
<b>TOTAL</b>	<b>34 UNITS</b>	
TREE REMOVAL (OVER 15 UNITS DIAMETER)		
LOCATION	UNITS	REMARKS
LT. STA. 6+81	17	10 17"
LT. STA. 6+84	34	20 17"
<b>TOTAL</b>	<b>51 UNITS</b>	

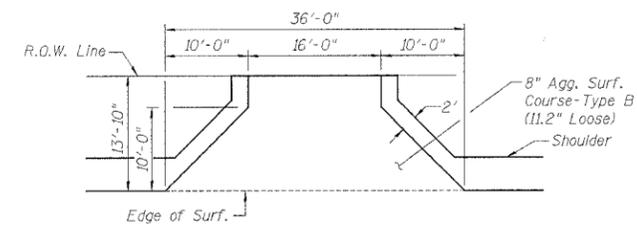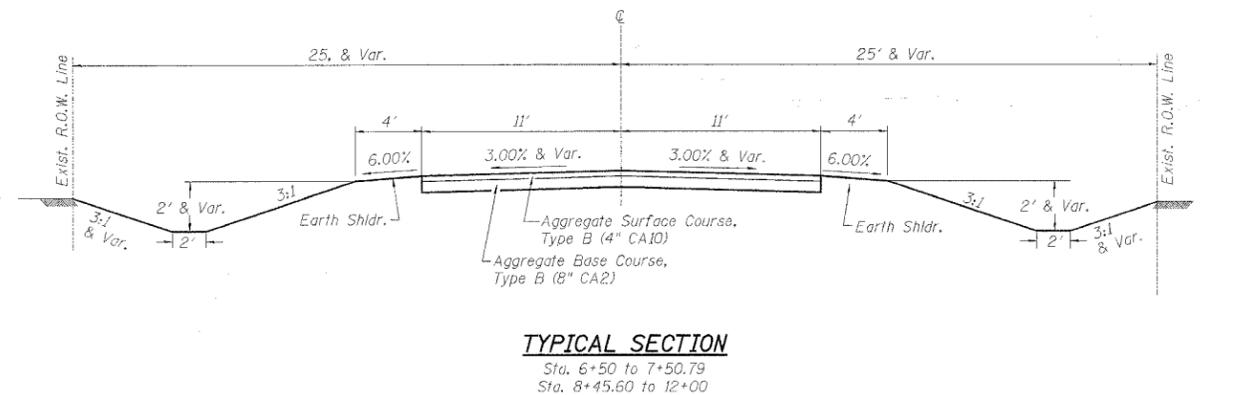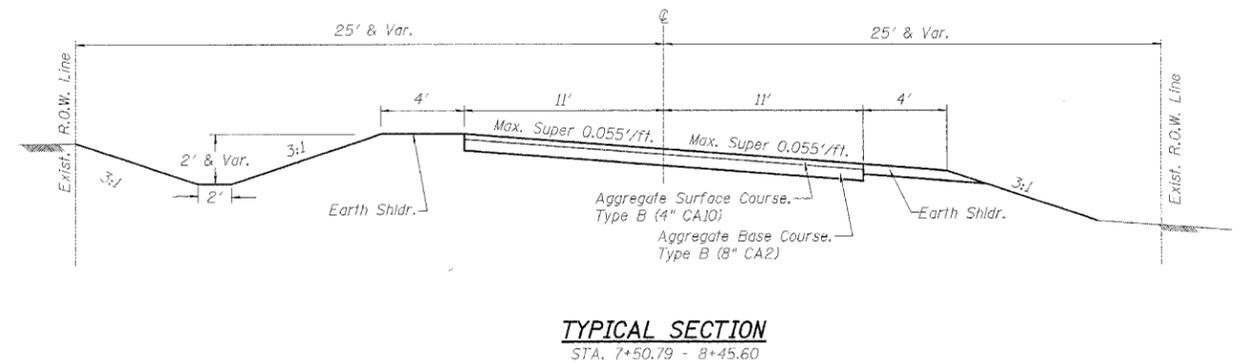

FIELD ENTRANCE LEFT STA. 8+74

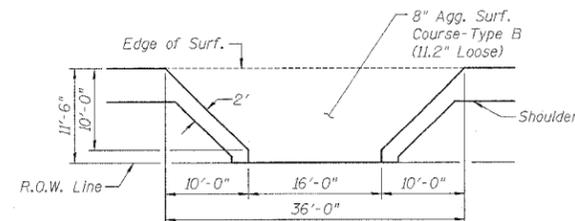

FIELD ENTRANCE RIGHT STA. 9+26

**PAVEMENT STRUCTURAL DESIGN**

Structural Design Traffic (S.D.T.) = Year 2013 P.V. 90  
 S.U. 5 } 100 ADT  
 M.U. 5 }

Class IV Road  
 Ogle County Soil Survey: AASHTO Soil Type A-6 & 7.  
 $E_{R1} = 3.0 \text{ KSI}$   
 Use 12" Aggregate Base (Ogle Co. Standard)  
 Pavement Design Procedures Memorandum #95-11 To County Engineers/Superintendents Of Highways, Municipal Engineers /Directors Of Public Works, Consulting Engineers Was Used.

GENERAL NOTES, SCHEDULES, AND TYPICAL SECTIONS  
 ANTERIOR ROAD OVER UNNAMED STREAM  
 SECTION 03-08111-00-BR  
 OGLE COUNTY  
 WHA # 1024003