
## STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

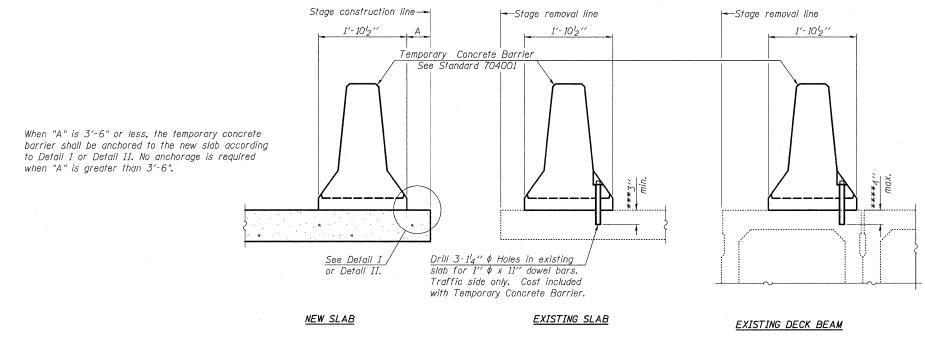

## NOTES

Detail I - With Bar Splicer or Couplers:

Connect one (1) I'' x 7' 'x ''W'' steel P to the top layer of couplers with 2-58" \$\phi\$ bolts screwed to coupler at approximate \$\mathbb{C}\$ of each barrier panel.

Detail II - With Extended Reinforcement Bars:

Connect one (1) 1" x 7" x "W" steel P to the concrete slab or concrete wearing surface with 2-5" \$\phi\$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate \$\mathbb{Q}\$ of each barrier panel.


Cost of anchorage is included with Temporary Concrete Barrier.


The 1" x 7" x "W" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

## SECTIONS THRU SLAB OR DECK BEAM

- \*\*\* Dimension shown is minimum required embedment into concrete.

  If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.
- \*\*\*\* If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

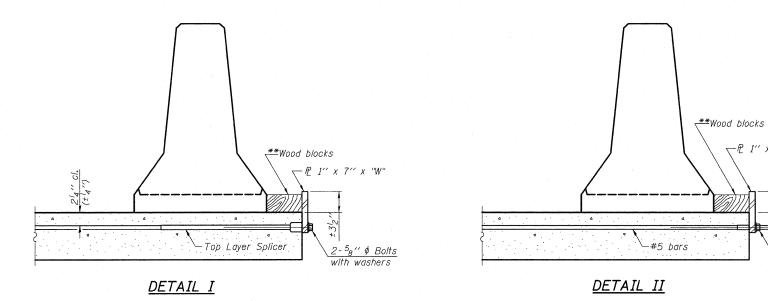

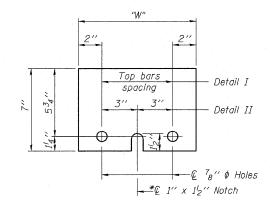

STEEL RETAINER P 1" x 7" x "W"

\* Required only with Detail II

\*\* Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact

"W" = Top bars spacing + 4"

with the steel retainer plate.

## Wight

Wight & Company
2500 North Frontage Road, Darien, II 60561
630.969.7000 630.969.7979 fax
Design Firm Registration 184–000451

-Extended #5 bars

2-5<sub>8</sub> " ∮ Expansion Anchors or

cast in place inserts with a certified min. proof load of

5,000 Lbs.

TEMPORARY CONCRETE BARRIER
FOR STAGE CONSTRUCTION
STRUCTURE NO. 016-2630

		•				
SHEET NO.16	F.A.U. RTE.	SECTION		COUNTY	TOTAL SHEETS	SHEE NO.
	3537	3264-T		COOK	110	60
19 SHEETS				CONTRACT	NO. 60	H44
	ILLINOIS FED. AID PROJECT					

efault G: \ENG\06-6790-17 Lake St Triple Box Culvert\

7/2011 10:56:30 AM Default

DESIGNED MAS
CHECKED BJM

BRT

DRAWN

CHECKED

R-27

1/27/2011

7-1-10