
LEGEND


- 1 EXISTING HMA SURFACING, ± 4.50"
- (2) EXISTING P.C. CONCRETE BASE COURSE, ± 9.50"
- (3) EXISTING COMB. CONC. CURB & GUTTER, TYPE B-6.24
- (4) EXISTING COMB. CONC. CURB & GUTTER, TYPE M-4.24
- (5) EXISTING HMA SHOULDER
- 6 EXISTING SUB-BASE GRANULAR MATERIAL, TYPE B, 4"
- (7) EXISTING AGGREGATE SHOULDER, TYPE B
- 8 EXISTING CONCRETE MEDIAN
- *(9) PROPOSED COMB. CONC. C&G REMOVAL AND REPLACEMENT
- (10) PROPOSED HMA SURFACE REMOVAL, 2-1/4"
- PROPOSED POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, 3/4"
- (12) PROPOSED HMA SURFACE COURSE, MIX "D", N70, 1-1/2"
- (13) PROPOSED AGGREGATE WEDGE SHOULDER, TYPE B
- 4) PROPOSED GRADING AND SHAPING OF SHOULDERS

NOTE:

- * LOCATIONS TO BE DETERMINED IN THE FIELD BY THE ENGINEER
- " THE CONTRACTOR SHALL MILL FIRST PRIOR TO PATCHING".

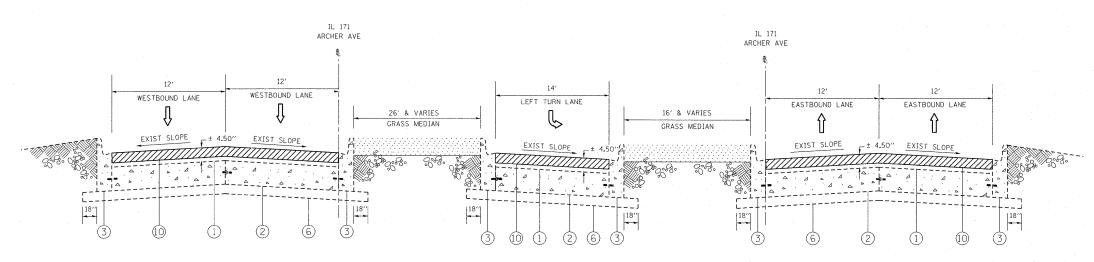

IL 171 (ARCHER AVE)
EXISTING TYPICAL SECTION
88TH AVE. INT. TO STA. 84+07
STATION EQUIVALENT:
STA. 85+00 (EB) = STA. 240.16 (WB)

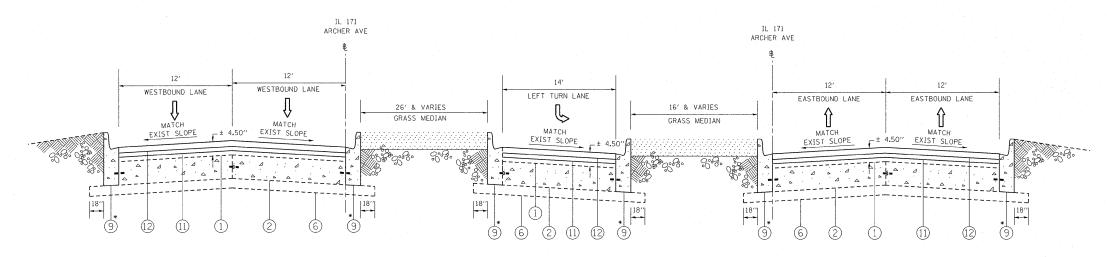

IL 171 (ARCHER AVE)
PROPOSED TYPICAL SECTION
88TH AVE. INT. TO STA. 84+07
STATION EQUIVALENT:
STA. 85+00 (EB) = STA. 240.16 (WB)

| F | ILE NAME = | USER NAME = galbanyr | DESIGNED - | REVISED - | STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION | | IL 171 (ARCHER AVENUE) | | | | F.A.U. | SECTION | COUNTY | TOTAL SHEET |
|---|---|--|--------------------------|-----------|--|--------|--|--|--|---------|----------|---------------------------|----------------------|-------------|
| c | :\pw_work\pwidot\galbanjr\d0194557\D152 | 310-sht-plan.dgn PLOT SCALE = 50.0000 '/ IN. PLOT DATE = 2/12/2011 | DRAWN - CHECKED - DATE - | REVISED - | | | | | | 3565 | B-R-2-RS | COOK | 37 7 CT NO. 60K54 | |
| | | | | | | | EXISTING AND PROPOSED TYPICAL SECTIONS | | | | 3333 | | | |
| L | | | | REVISED - | | SCALE: | E: SHEET NO. OF SHEETS STA. TO | | | TO STA. | | ILLINOIS FED. AID PROJECT | | |