
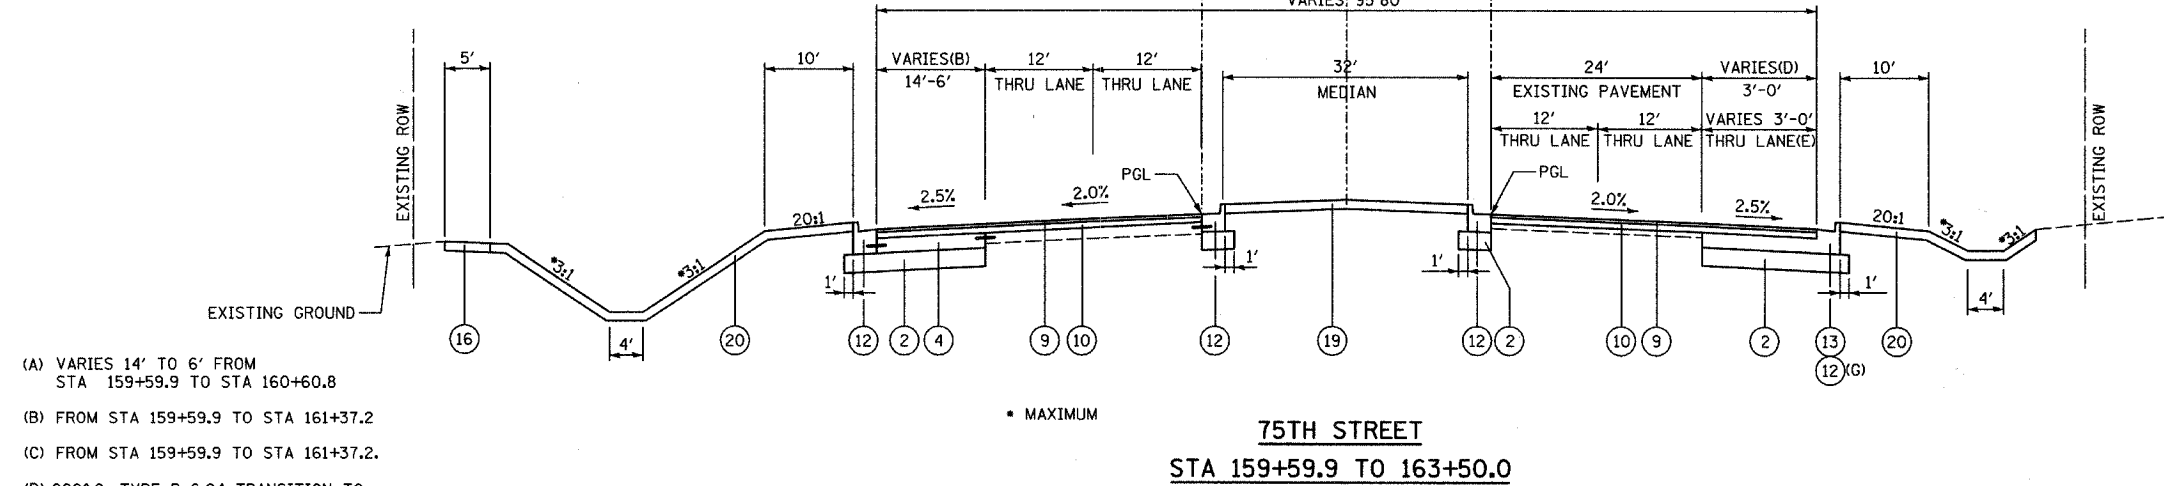
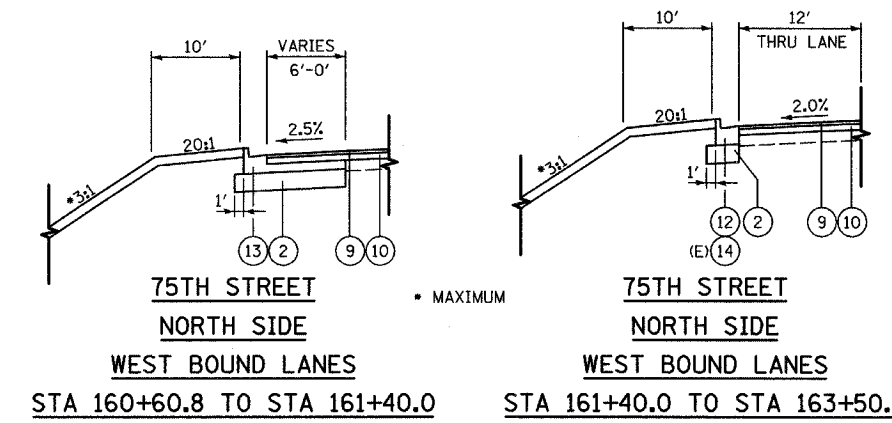
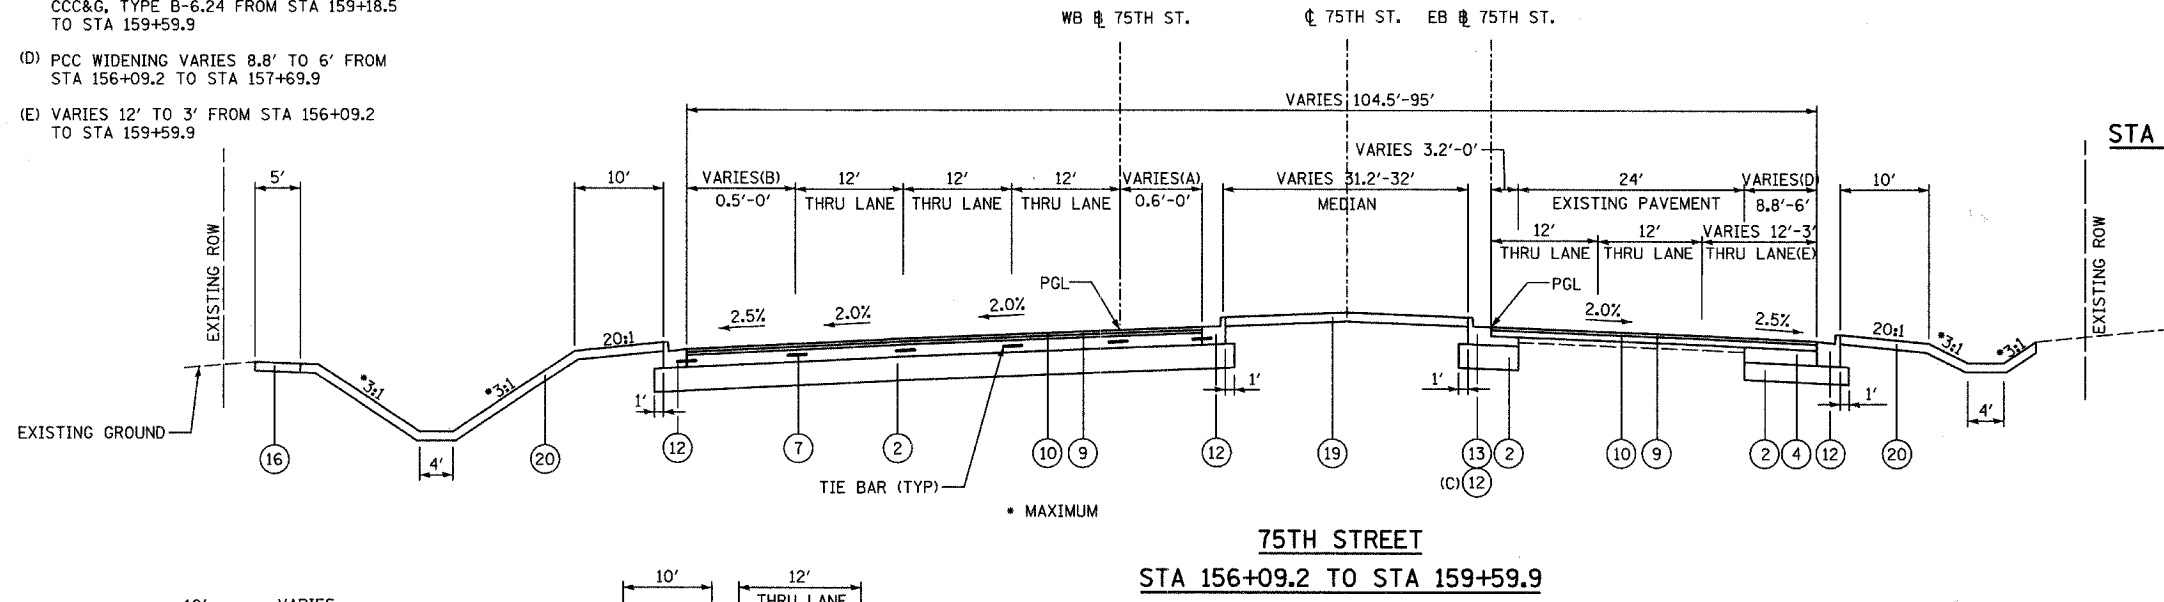


- (A) VARIES 0.6' TO 0' FROM STA 156+09.2 TO 156+18.5
- (B) VARIES 0.5' TO 0' FROM STA 156+09.2 TO 156+18.5
- (C) CCC&G, TYPE B-6.24 (SPECIAL) FROM STA 156+09.2 TO STA 159+18.5  
CCC&G, TYPE B-6.24 FROM STA 159+18.5 TO STA 159+59.9
- (D) PCC WIDENING VARIES 8.8' TO 6' FROM STA 156+09.2 TO STA 157+69.9
- (E) VARIES 12' TO 3' FROM STA 156+09.2 TO STA 159+59.9

**NOTE:**  
SEE RIVER ST PROPOSED TYPICAL FOR ALTERNATE SOUTH SIDE TREATMENT FROM STA 155+09.0 TO STA 156+00.3

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2552	00-00114-00-PV	DuPAGE	563	29
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		
<b>CONTRACT NO. 63024</b>				




- (A) VARIES 14' TO 6' FROM STA 159+59.9 TO STA 160+60.8
- (B) FROM STA 159+59.9 TO STA 161+37.2
- (C) FROM STA 159+59.9 TO STA 161+37.2
- (D) CCC&G, TYPE B-6.24 TRANSITION TO CCC&G, TYPE M-4.24 (VARIABLE WIDTH GUTTER FLAG) FROM STA 162+82.0 TO STA 162+85.0  
CCC&G, TYPE M-4.24 (VWGF) GUTTER VARIES 2'-8' FROM STA 162+85.0 TO 163+50.0
- (E) CCC&G, TYPE B-6.24 FROM STA 161+10.5 TO STA 163+19.8  
GUTTER FLAG WIDTH VARIES FROM 2'-8' FROM STA 163+19.8 TO STA 163+50.0

- LEGEND:**
- (1) GEOTECHNICAL FABRIC FOR GROUND STABILIZATION
  - (2) AGGREGATE SUBGRADE 12"
  - (3) SUBBASE GRANULAR MATERIAL, TYPE B 9"
  - (4) PORTLAND CEMENT CONCRETE BASE COURSE 10"
  - (5) HOT-MIX ASPHALT SURFACE COURSE, MIX "C", NSO 1 1/2"
  - (6) LEVELING BINDER (MACHINE METHOD), NSO 1 1/2"
  - (7) PORTLAND CEMENT CONCRETE BASE COURSE 8 1/2"
  - (8) AGGREGATE BICYCLE PATH
  - (9) POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", NSO 1 3/4"
  - (10) POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, IL-19.0, NSO 2 1/4"
  - (11) COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12
  - (12) COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24
  - (13) COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24 (SPECIAL)
  - (14) COMBINATION CONCRETE CURB AND GUTTER, TYPE M-4.24 (VARIABLE WIDTH GUTTER FLAG)
  - (15) CONCRETE MEDIAN SURFACE, 4"
  - (16) PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH
  - (17) HOT-MIX ASPHALT SHOULDERS, 6"
  - (18) STEEL PLATE BEAM GUARDRAIL, TYPE A OR B (SEE PROPOSED PLANS)
  - (19) LANDSCAPED MEDIAN (SEE LANDSCAPING PLANS)
  - (20) LANDSCAPED AREA (SEE LANDSCAPING PLANS)
  - (21) RETAINING WALL (SEE STRUCTURAL PLANS)
  - (22) COMBINATION CONCRETE CURB AND GUTTER, TYPE M-2.24
  - (23) CONCRETE MEDIAN
  - (24) PIPE UNDERDRAINS 6"

REVISIONS	
NAME	DATE

INTERSECTION IMPROVEMENT  
WASHINGTON STREET - 75th STREET  
PROPOSED TYPICAL SECTIONS  
75TH STREET  
SHEET 7 OF 11

CONSULTANT  
**TYLIN INTERNATIONAL**

City of  **Naperville**

DRAWN: \_\_\_\_\_ SHEET NO. \_\_\_\_\_  
 CHECKED: \_\_\_\_\_  
 APPROVED: \_\_\_\_\_  
 DATE: APRIL 11, 2008  
 SCALE: NONE  
 JOB NO.: P-91-494-00 PROJECT NO.: M-CMM-7003 (985)

4/11/2008 10:25:52 AM