


₡ IL ROUTE 47-12'-7" 11'-0' 11'-0" 5'-0" VARIES 4'-0" TO 2'-8 3/4" 4'-0" 26'-0" 26'-0" (12)-14) 14) (13) (10)(8)(9)(11) (11)(9)(8)(10)


PROPOSED TYPICAL SECTION

STA. 29+10.0 TO STA. 29+73.5

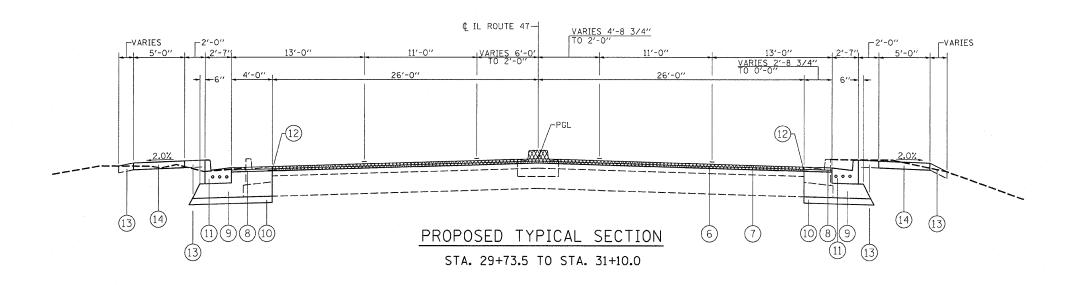

## LEGEND

- 1) EXISTING 13" BITUMINOUS BASE COURSE
- EXISTING 3" BITUMINOUS BINDER COURSE
- EXISTING 1 1/2" BITUMINOUS CONCRETE SURFACE COURSE
- EXISTING COMBINATION CONCRETE CURB AND GUTTER TY. B - 6.24
- EXISTING CONCRETE MEDIAN TY. SB 6.12 \*
- HMA SURFACE REMOVAL, VARIABLE DEPTH \*\*
- PROPOSED 1 1/2" HMA SURFACE COURSE
- PROPOSED 1" LEVELING BINDER COURSE
- PROPOSED HMA BASE CSE. WID., VARIABLE DEPTH \*\*\*
- PROPOSED SUB-BASE GRANULAR MATERIAL, TYPE A 4"
- PROPOSED COMBINATION CONCRETE CURB AND GUTTER TY. B - 6.24
- STRIP REFLECTIVE CRACK CONTROL TREATMENT
- TOPSOIL FURNISH AND PLACE, 4" (TYP.)
- PROPOSED PCC SIDEWALK 4"
  - \* RAISED MEDIAN STA. 28+20.1 TO 31+10.0 TO BE REMOVED
  - \*\* VARIABLE DEPTH MILLING (2.5" AVG.) TO BE USED TO RELOCATE CROWN TO MIDDLE OF ROADWAY AS NECESSARY (SEE CROSS SECTIONS FOR EXISTING CROWN LOCATION)
  - \*\*\* THE TOP' LIFT OF BASE COURSE WIDENING SHALL BE A POLYMERIZED HMA IL 19.0 N90 BINDER MIX - MINIMUM THICKNESS OF 21/4".

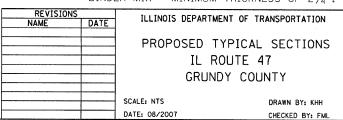

IL ROUTE 47 - TYPICAL SECTIONS

DATE NAME SCALE NAME