


## STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

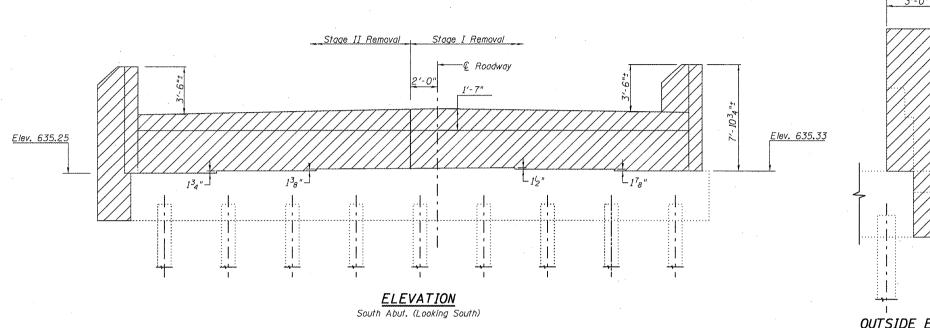

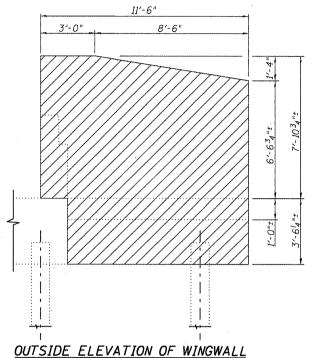



Stage II Removal Stage I Removal \*Existing vertical reinforcement to remain. Cut to fit new construction. Rdwy. -Sta. 677+48.12 Bk. of Abut. -- 1'-6"  $\downarrow$  A

Existing vertical reinforcement extending into the new construction shall be cleaned and incorporated into the new construction. Cost included with Concrete Removal. Hatched area indicates Concrete Removal.

Cross hatched area indicates Slopewall Removal. Existing reinforcement not extending into the areas of new construction shall be cut at the removal line and removed. Exposed portion shall be cleaned and coated with a layer of epoxy. Cost included with Concrete Removal.

## BILL OF MATERIAL

Item	Unit	Total
Concrete Removal	Cu. Yd.	20.0
Slopewall Removal	Sq. Yd.	5

(Sheet 1 of 2)
CONCRETE REMOVAL STRUCTURE NO. 059-0041 (N.B.)

31 SHEETS

SECTION A-A

--- Slopewall Removal

TOTAL SHEET NO. F.A.I. RTE. SECTION COUNTY SHEET NO. 26 Macoupin 137 132 55 (59, 68)RS-3, BR CONTRACT NO. 72921 FED. ROAD DIST. NO. 6 | ILLINOIS | FED. AID PROJECT

AREVISED SHEET 4/20/11

PLAN

South Abut.