

APPLICATION RATES

THE FOLLOWING RATES OF APPLICATION HAVE BEEN USED IN CALCULATING PLAN QUANTITIES:


GRANULAR MATERIALS	2.05	TON / CU YD
RIPRAP	1.75	TON / CU YD
BITUMINOUS MATERIALS PRIME COAT	0.05	LB / SQ FT (REGULAR)
	0.025	LB / SQ FT (FOG COAT)
HMA RESURFACING (BINDER, SURF) (112 LBS)	0.056	TON/SQ YD*IN

SIGNATURES

MIXTURE REQUIREMENT

THE FOLLOWING MIXTURE REQUIREMENTS ARE APPLICABLE FOR THIS PROJECT				
MIX NUMBER:	1	2	3	4
MIX USE:	INTERSTATE MAINLINE PAVEMENT & RAMP (POLYMER HMA BINDER)	INTERSTATE MAINLINE PAVEMENT AND RAMP (POLYMER HMA SURF COURSE)	INTERSTATE SHOULDERS, HMA SHOULDERS, 8" (TOP LIFT 2" MIN.)	HMA SHOULDERS, 8" (LOWER LIFTS)
AC/PG:	SBS PG 70-22	SBS PG 70-22	PG 64-22	PG 64-22
DESIGN AIR VOIDS:	4.0% @ N90	4.0% @ N90	4.0% @ N50	4.0% @ N50
MIXTURE COMPOSITION:	IL 19.0, FG	IL 9.5	IL 9.5	IL 19.0
FRICTION AGGREGATE:	N/A	MIX E	MIX C	N/A
QUALITY MANAGEMENT:	PFM	PFM	QC/QA	QC/QA

ASPHALT PAVING LIFT DIAGRAM

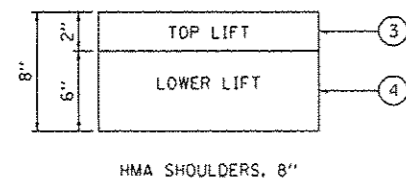

DISTRICT SIX

EXAMINED 7/3 20 14
Michelle Ph for John Negand
 OPERATIONS ENGINEER

EXAMINED June 30 20 14
Ron Chamberlain
 PROJECT IMPLEMENTATION ENGINEER

EXAMINED July 11 20 14
Jeffrey R. Morgan
 PROGRAM DEVELOPMENT ENGINEER