


LOOP DESIGNATION	NUMBER OF TURNS	READING AT HANDHOLE OR JUNCTION BOX				READING AT CONTROLLER			
		CALCULATED		METERED		CALCULATED		METERED	
		$\mu\eta$	Ω	$\mu\eta$	Ω	$\mu\eta$	Ω	$\mu\eta$	Ω
IL 4 & BRUNS LANE									
ELF	4	144	0.42			214	10.75		
ERF	4	141	0.36			211	10.69		
ERE	4	145	0.44			200	8.56		
ELE	4	142	0.38			197	8.50		
ERS	4	145	0.44			184	6.20		
ELS	4	142	0.38			181	6.14		
ELB	2	179	0.62			215	5.93		
ELT	2-4-2	324	0.93			360	6.24		
NAS	2	184	0.74			207	4.13		
NAP	2-4-2	330	1.06			352	4.45		
NRT	2-4-2	460	1.29			483	4.68		
WLT	2-4-2	324	0.93			332	2.17		
WLB	2	179	0.63			187	1.87		
WRS	4	142	0.38			152	1.81		
WLS	4	145	0.44			154	1.88		
WRE	4	143	0.39			168	4.11		
WLE	4	145	0.45			170	4.18		
WRF	4	141	0.35			181	6.29		
WLF	4	144	0.42			184	6.36		
SRT	2-4-2	462	1.34			471	2.65		
SAP	2-4-2	329	1.06			338	2.37		
SAS	2	184	0.74			193	2.05		
IL 4 & PALOMINO ROAD									
NLF	4	142	0.38			198	8.72		
NRF	4	140	0.32			196	8.66		
NRE	4	141	0.36			182	6.41		
NLE	4	139	0.31			180	6.36		
NLS	4	144	0.43			170	4.20		
NRS	4	142	0.37			167	4.14		
NLB	2	176	0.62			198	3.88		
NLT	2-4-2	308	0.90			331	4.16		
WAS	2	177	0.78			178	0.91		
WAF	2-4-2	316	1.09			317	1.22		
WRT	2-4-2	263	0.84			264	0.97		
SLT	2-4-2	308	0.89			317	2.25		
SLB	2	2	0.05			11	1.41		
SLS	4	5	0.12			33	4.34		
SRS	4	7	0.18			36	4.41		
SLE	4	4	0.11			48	6.54		
SRE	4	7	0.17			50	6.61		
SLF	4	4	0.10			62	8.75		
SRF	4	6	0.16			65	8.81		
EAS	2	174	0.72			203	4.99		
EAP	2-4-2	314	1.04			343	5.31		
ERT	2-4-2	261	0.78			290	5.05		

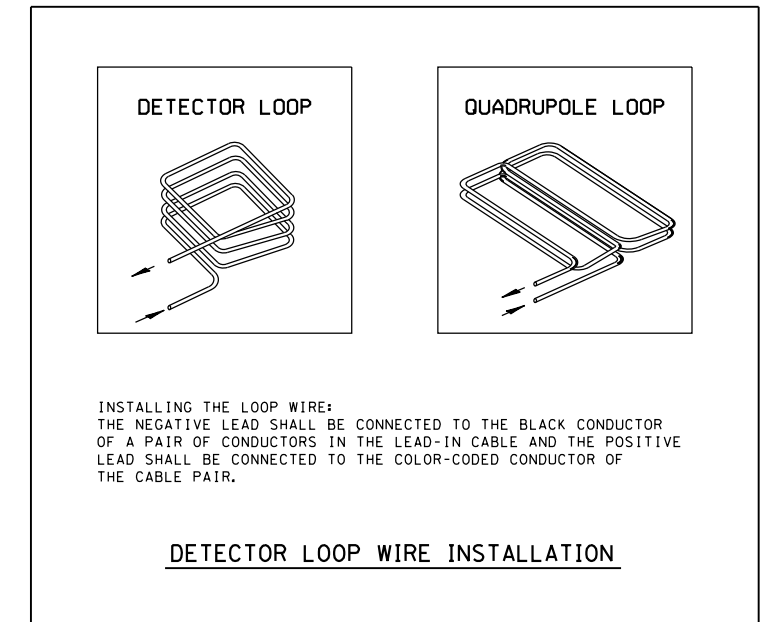

- DETECTOR NOTES:**
1. THE DETECTOR LOOP SHALL BE CENTERED IN THE LANE IN WHICH IT IS SHOWN. ANY ADJUSTMENTS ARE TO BE MADE ONLY AT THE DIRECTION OF THE ENGINEER.
 2. THE DETECTOR LOOPS SHALL CONSIST OF THE NUMBER OF TURNS AS SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER.
 3. ACCEPTANCE OF THE LOOPS AS METERED SHALL BE DETERMINED BY THE ENGINEER.
 4. ALL DETECTOR WIRES SHALL BE MARKED WITH WATERPROOF LABELS USING THE WIRING IDENTIFICATION SHOWN ON THE PLANS. THE + AND - OF EACH LOOP MUST BE USED TO IDENTIFY CURRENT FLOW. ALWAYS CONNECT THE BLACK WIRE OF EACH PAIR TO THE NEGATIVE (-) LOOP WIRE.
 5. ALL QUADRAPOLE LOOPS SHALL BE 2-4-2 DESIGN.
 6. THE CONTRACTOR SHALL CONTACT DISTRICT 6 OPERATIONS FOR ASSISTANCE IN DETECTOR LOOP LAYOUT AT LEAST 48 HOURS BEFORE INSTALLING DETECTOR LOOPS (Ph. # 217-782-7314)