




PAYMENT LIMITS FOR PRECAST CONCRETE BOX CULVERTS

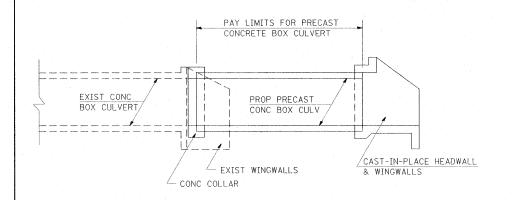


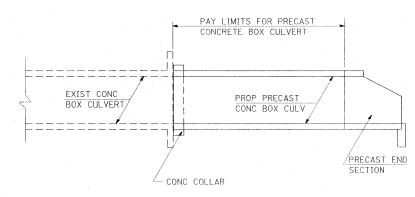

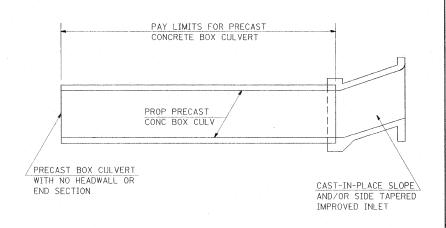

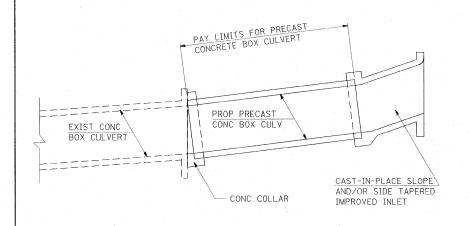

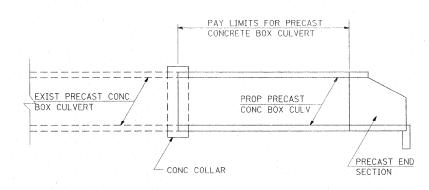

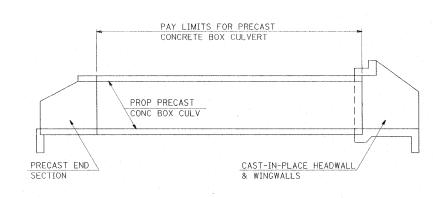

NEW CULVERTS

CULVERT EXTENSIONS

NOTES:

WHEN PRECAST CONCRETE BOX CULVERTS ARE SPECIFIED ON THE PLANS, THEY WILL BE MEASURED BY THE FOOT. THE OVERALL LENGTH SHALL BE MEASURED OUT-TO-OUT OF THE PRECAST SEGMENTS ALONG THE CENTERLINE OF THE CULVERT. THE BOX CULVERT END SECTIONS WILL BE MEASURED AS EACH. CAST-IN-PLACE COLLARS WILL NOT BE PAID FOR SEPERATELY, BUT SHALL BE INCLUDED IN THE COST OF THE PRECAST CONCRETE BOX CULVERT. SEE ARTICLE 540.08 OF THE STANDARD SPECIFICATIONS ADOPTED JANUARY

THE TERM "BOX CULVERT END SECTION" AS USED HEREIN SHALL BE DEFINED AS EITHER PRECAST END SECTIONS OR CAST-IN-PLACE HEADWALLS AND WINGWALLS CONSTRUCTED AS SHOWN IN THE PLANS.

THROUGHOUT THESE PLANS, QUANTITIES SHOWN FOR CLASS SI CONCRETE AND REBARS TO BE USED IN COLLARS, HEADWALLS, WINGWALLS OR IMPROVED INLETS FOR PRECAST CONCRETE BOX CULVERTS ARE PROVIDED FOR INFORMATION AND BIDDING ONLY, AND SHALL NOT BE PAID FOR SEPERATELY.

| REVISIONS | | REVISIONS | | REVISIONS | | REVISED | RE

CONTRACT NO. 78172

			STD. 9-81 [REVISED]
FILE NAME = USER NAME = colemn DESIGNED	REVISED	PAYMENT LIMITS FOR	F.A.I. SECTION
c:\pw_work\pwidot\colemm\d0169788\78172 sht_misc.dgn DRAWN -	REVISED STATE OF ILLINOIS		57 *
PLOT SCALE = 50.0000 '/ IN. CHECKED -	REVISED DEPARTMENT OF TRANSPORTATION	PRECAST CONCRETE BOX CULVERTS	
PLOT DATE = 2/3/2011 DATE -	REVISED -	SCALE: SHEET NO. OF SHEETS STA. TO STA.	ILLINOIS FED. A
			(41-2-1,41-3,41-3-1)R-1