

-DUCT BANK SHALL TRANSITION TO (OR BE)

REINFORCED CONCRETE ENCASED DUCT WHERE

3 FT. MIN. BEYOND HANDHOLE. DIRECT BURY

DUCT (WITHOUT CONCRETE ENCASEMENT) DOES

NOT RÈQUIRE REBAR & CONCRETE ENCASEMENT

-#3 TIE BARS.

#4 REBAR.

AT INTERFACE TO HANDHOLE.

-EXTEND NO. 4 REBAR INTO HANDHOLE APPROX 3". PROVIDE 90" "L" HOOK

ON REBAR TERMINATION IN HANDHOLE.

PROVIDE CONDUIT BUSHING OR BELL

AT TERMINATION IN HANDHOLE (TYP.)

(TYP.) OR EXTEND REBAR EPOXY ANCHORED INTO HANDHOLE WITH 4"

EMBEDMENT.

ENTERING A HANDHOLE. PROVIDE REINFORCEMENT

DUCT BANK NOTES:


- 1. DIMENSIONS FOR CONCRETE COVERAGE AND SEPARATION BETWEEN DUCTS ARE MINIMUM.
- 2. INCLUDE DUCT SPACERS AS MANUFACTURED BY UNDERGROUND DEVICES INC., OR APPROVED EQUAL TO MAINTAIN PROPER SEPARATION OF CONDUITS
- 3. REBAR IS REQUIRED TO ACCOMMODATE FUTURE DUCT EXTENSIONS & INTERFACE AT DUCT BANK TERMINATIONS. CONCRETE ENCASED DUCT BANKS TERMINATING IN HANDHOLES REQUIRE REBAR AT TERMINATIONS.
- 4. CONDUITS FOR CONCRETE ENCASED DUCT SHALL BE SCHEDULE 40 PVC CONFORMING TO ITEM 110.
- 5. MINIMUM DEPTH OF TOP OF DUCT ENCASEMENT SHALL
- 6. HIGH VOLTAGE AND LOW VOLTAGE CIRCUITS SHALL NOT BE INSTALLED IN THE SAME RACEWAY, CONDUIT, DUCT, HANDHOLE, OR MANHOLE,
- 7. HOMERUN CABLES FOR A RESPECTIVE CIRCUIT SHALL BE INSTALLED IN THE SAME RACEWAY OR DUCT.
- 8. DUCT INTERFACE TO HANDHOLES OR MANHOLES WILL BE CONSIDERED INCIDENTAL TO THE RESPECTIVE DUCT PAY

CABLE & DUCT MARKER NOTES:

1. THE COST OF ALL TURF AND PAVEMENT DUCT MARKERS SHALL BE INCIDENTAL TO THE DUCT. THE COST OF ALL CABLE MARKERS SHALL BE INCIDENTAL TO THE CABLE.


LI032

- 2. BITUMINOUS PAVEMENT DUCT MARKER AND CONCRETE DUCT MARKER TO BE PROVIDED AT EACH END OF EACH DUCT AS SHOWN ON THE LOCATION PLAN. FOR CONCRETE PAVEMENT. THE LETTER "D" SHALL BE IMPRESSED IN THE PAVEMENT INSTEAD OF THE MARKER. THE LETTER SHALL BE FORMED AS DESCRIBED IN NOTE 4.
- 3. CABLE MARKERS SHALL BE PLACED AT CHANGES OF DIRECTION AND APPROXIMATELY EVERY 200' ALONG CABLE
- 4. CONCRETE CABLE MARKERS AND DUCT MARKERS SHALL HAVE LETTERS 4" HIGH, 3" WIDE WITH WIDTH OF STROKE ½" AND ¼" DEEP. ALL LETTERS, NUMBERS AND ARROWS

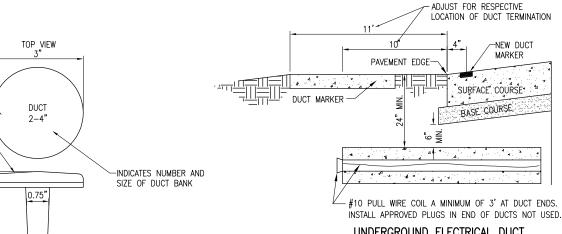


UNDERGROUND ELECTRICAL DUCT

(NOT TO SCALE)



TURF CABLE MARKERS "NOT TO SCALE"



0.15"-

BITUMINOUS PAVEMENT DUCT MARKERS

"NOT TO SCALE

TOP OF MARKER SHALL BE FLUSH WITH FINISHED

PAVEMENT SURFACE. MARKER MAY BE INSTALLED IN

A DRILLED HOLE AND SECURED WITH EPOXY GLUE.

"NOT TO SCALE"

PRESTAMPED OR-

3/16" R.

CHISELED ON THE JOB

(%" HIGH LETTERING MIN.)

TURF DUCT MARKERS "NOT TO SCALE"

IMPRESSED NUMBERS NOTING NUMBER & SIZE OF DUCTS. ADJUST FOR RESPECTIVE -CONCRETE QUANTITY & SIZE OF DUCTS DUCT MARKER 2-4" 2'-0" FINISHED GRADE DUCT-MARKER



SMOOTH TROWEL FINISH

(SLOPE TO DRAIN)

6" SCHED 40 PVC DRAIN

PIPE. FILL WITH PEA GRAVEL

TO ACCOMODATE DRAINAGE. NOTE 6" OF CA-7 GRAVEL

MAY BE PROVIDED, INSTEAD

OF 6" CONCRETE FLOOR

CONTRACTORS OPTION.

LIDS FOR LOW VOLTAGE HANDHOLES SHALL BE LABELED "LOW VOLTAGE". LIDS FOR HIGH VOLTAGE HANDHOLES SHALL BE LABELED "HIGH VOLTAGE". COORDINATE LETTERING WITH MFR.

 \bigcirc \bigcirc

 \bigcirc

6" SAND CUSHION

ADD "HIGH" OR "LOW" PER PLANS

-WAY, 3-WAY, OR 4-WAY

DUCT BANK AS APPLICABLE

HEAVY DUTY FRAME & LID SUITABLE FOR

-610 P.C.C.

H-20 LOADING, NEENAH CAT. NO.

- HANDHOLES MAY BE CAST IN PLACE OR PRECAST. PRECAST MANUFACTURERS MUST BE ON THE IDOT (ILLINOIS DEPT. OF TRANSPORTATION) APPROVED LIST OF CERTIFIED PRECAST CONCRETE PRODUCERS.
- ALL CORING, INTERFACE, AND LABOR ASSOCIATED WITH CONDUIT, DUCT, CABLE IN UNIT DUCT, AND / OR CABLE ENTRIES WILL BE CONSIDERED INCIDENTAL TO THE INSTALLATION OF THE HANDHOLE AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED.

ELECTRICAL HANDHOLE

HANSON

TAXIWAY "C" EXTENSION

LITCHFIELD MUNICIPAL AIRPORT LITCHFIELD, ILLINOIS

25