


8" MIN. TRENCH WALL 8" MIN.

SECTION

CONCRETE COLLAR DETAILS




FRAME AND LID TYPE 1

FRAME AND GRATE **TYPE 3 & 3V**

GRATE INV. ELEV.

TYPICAL LID/GRATE ELEVATION REFERENCE DETAIL


NOTE: ALL MANHOLE/INLET RELATED STATION/OFFSET CALLOUTS ARE REFERENCED TO THE CENTER OF GRATE OR LID (2' OPENING) ON TOP.




6' FOR ALL PIPE < 36" USED FOR QTY.'S 4' FOR ALL PIPE > 36" USED FOR QTY.'S (MODIFIES STD.)

REINFORCED CONCRETE PIPE TEE DETAIL


(SEE ALSO STANDARD 542606. NO ADDS OR DEDUCTS WILL BE MADE FOR DIFFERENT PIPE RUN LENGTHS IF THE CONTRATOR UTILIZES TEE DIMENSIONS DIFFERENT FROM THIS DETAIL)



VANE GRATE CURB FLOW ARROW DETAIL



STORM SEWER DETAILS

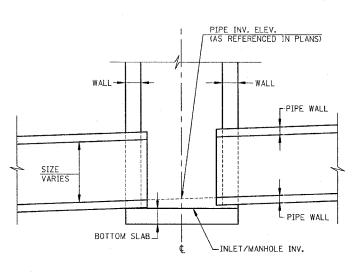

TYPICAL INLET/MANHOLE ELEVATION REFERENCE DETAIL


TO STA. FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT CONTRACT NO. 95500 WIDTH OF PAVEMENT PAVEMENT REMOVAL (INCLUDED IN COST OF CLASSIC PATCH)

F.A.U. SECTION

8419 99-00048-01-PV FAYETTE

COUNTY

142 57

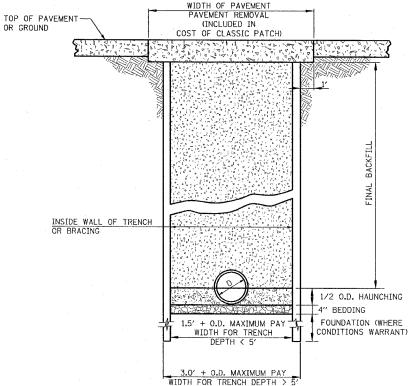

TRENCHING DETAIL

CA 15, CA-16, CM-15, OR CM-16 REQUIRED IN ALL LOCATIONS (INCLUDED IN THE COST OF PIPE)

HAUNCHING



CA 15, CA-16, CM-15, OR CM-16 REQUIRED IN ALL LOCATIONS (INCLUDED IN THE COST OF PIPE)

FINAL BACKFILL



CA 7 REQUIRED IN ALL LOCATIONS WHERE THE EDGE OF THE TRENCH IS LOCATED WITHIN TWO (2) FEET OF A PERMANENT SURFACE, INCLUDING DRIVEWAYS AND SIDEWALK AND IN ALL LOCATIONS WHERE EXISTING MAINS AND APPURTENANCES ARE TO BE REMOVED.

CA 7 PAID FOR AS TRENCH BACKFILL, SPECIAL.

CASE I BACKFILL FREE FROM ORGANICS AT ALL OTHER LOCATIONS (INCLUDED IN THE COST OF PIPE)

ILLINOIS DEPARTMENT OF TRANSPORTATION STORM SEWER DETAILS SCALE: VERT. HORIZ. DRAWN BY KOJ CHECKED BY BWC E.D.W. DATE