


U-BOLTS: DEPENDS ON THE SIZE OF THE 802T: MAX. OD 1-7/16" 803T: MAX. OD 2-1/8" 805T: MAX. OD 4~3/16"


> ALL PART NUMBERS ARE THOMPSON LIGHTNING PROTECTION INC., 901 SIBLEY HIGHWAY, ST. PAUL, MN 55118-1792, MANUFACTURERS, CONTRACTORS & ENGINEERS, 1-800-777-1230, (P) 651-455-7661, (F) 651-455-2545




AIR TERMINAL MOUNTING

DOWNLEAD CABLE SUPPORT OPTIONS


LIGHTNING PROTECTION DETAIL FOR GLIDE SLOPE ANTENNA TOWER

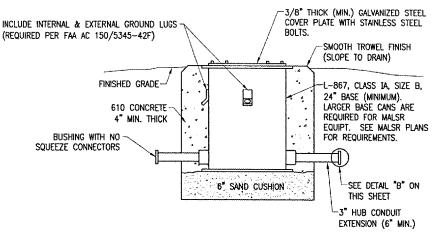

SPLICE CAN DETAIL (NOT TO SCALE)



DETAIL "B" (NOT TO SCALE)

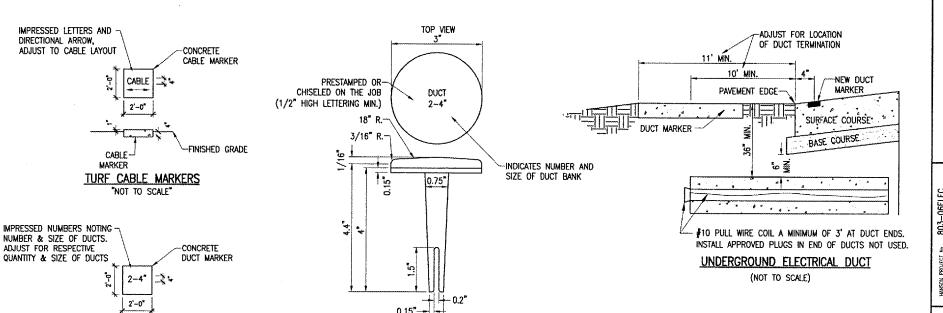

-FINISHED GRADE

DUCT-

TURF DUCT MARKERS


"NOT TO SCALE"

MARKER

TOP OF MARKER SHALL BE FLUSH WITH FINISHED PAVEMENT SURFACE. MARKER MAY BE INSTALLED IN A DRILLED HOLE AND SECURED WITH EPOXY GLUE.

BITUMINOUS PAVEMENT DUCT MARKERS

"NOT TO SCALE"

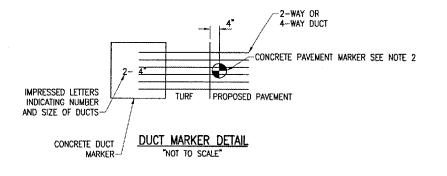

NOTES:

- 1. THE COST OF ALL TURF AND PAVEMENT DUCT MARKERS SHALL BE INCIDENTAL TO THE DUCT. THE COST OF ALL CABLE MARKERS SHALL BE INCIDENTAL TO
- 2. CONCRETE DUCT MARKER TO BE PROVIDED AT CHANGES OF DIRECTION AND AT EACH END OF EACH DUCT AS SHOWN ON THE LOCATION PLAN. FOR CONCRETE PAVEMENT, THE LETTER "D" SHALL BE IMPRESSED IN THE PAVEMENT INSTEAD OF THE MARKER. THE LETTER SHALL BE IMPRESSED AS DESCRIBED IN NOTE 4.
- 3. CABLE MARKERS SHALL BE PLACED AT CHANGES OF DIRECTION AND EVERY 200' ALONG CABLE RUNS. CABLE MARKERS SHALL BE INSTALLED IMMEDIATELY ABOVE THE CABLE.
- 4. CONCRETE CABLE MARKERS AND DUCT MARKERS SHALL HAVE LETTERS 4" HIGH, 3" WIDE WITH WIDTH OF STROKE 1/2" AND 1/2" DEEP. ALL LETTERS, NUMBERS AND ARROWS TO BE IMPRESSED.

DK051

HANSON

∞ర DETAILS MALSR INSTALL