



PLAN VIEW

MOTES

- EXPANSION JOINTS SHALL BE CONSTRUCTED AS SHOWN ON THE DETAILS FOR P.C.C. SIDEWALK.
- 2. THE CURB BETWEEN ADJACENT DRIVEWAYS SHALL BE FULL HEIGHT FOR A DISTANCE OF AT LEAST FOUR 4 FEET (1.2 METERS)
- P.C. CONCRETE DRIVEWAYS SHALL BE CONSTRUCTED AT LOCATIONS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
- Y" (20) PREFORMED EXPANSION JOINTS WILL NOT BE PAID FOR SEPARATELY BUT SHALL BE CONSIDERED INCIDENTAL TO P.C.C. DRIVEWAY PAVEMENT 8" (200).
- COMBINATION CONC. CURB AND GUTTER SHALL BE MEASURED STRAIGHT ACROSS THE DRIVEWAY. NO ADDITIONAL COMPENSATION WILL BE ALLOWED FOR THE TRANSITION CURB AND GUTTER.

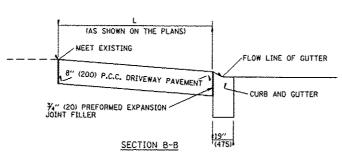

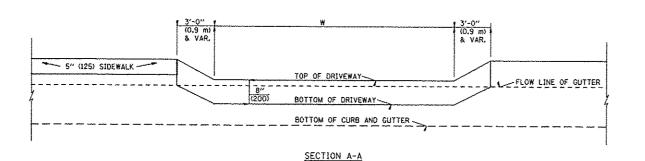

P.C.C. DRIVEWAY PAVEMENT DETAIL

ADJACENT BUILDING, RETAINING WALL OR OTHER STRUCTURE PRIVATE -R.O.W. SIDEWALK KEYSTONE. DRIVEWAY S00 -- SIDEWALK APRON _RAMP_SIDEWALK CURB AND GUTTER TO MEET CURB DEPRESSED CURB FIRE HYDRANT PLATFORM TRAFFIC SIGNAL, TROLLEY POWER THE PROPOSED CARRIAGE WALK SHALL DEPRESSED CURB POLE, LIGHT STANDARD OR COLUMN TO BE 3'-0" (0.9 m) SQUARE OR FOR OVERHEAD STRUCTURE. AS DIRECTED BY THE ENGINEER. BE CONSTRUCTED THE SAME WINTH AND LENGTH AS THE EXISTING CARRIAGE WALK AND PAID FOR AS PORTLAND CEMENT CONCRETE SIDEWALK, 5-INCHES (125). ____ PAVEMENT - PAVEMENT ----

1" (25) PREFORMED EXPANSION JOINT FILLER


SLOPE FOR SIDEWALK 1" (25) IN 3'-0" (0.9 m) IN CHICAGO


NOTES

- ONE-HALF INCH THICK EXPANSION JOINTS SHALL BE PLACED BETWEEN THE SIDEWALK AND ALL STRUCTURES SUCH AS LIGHT STANDARDS, TRAFFIC LIGHT STANDARDS, MANHOLES, WHICH EXTEND THROUGH THE SIDEWALK.
- 2. ¾4" (20) THICK EXPANSION JOINTS SHALL BE PLACED AT INTERVALS OF NOT MORE THAN 100 FEET (30 METERS) IN THE SIDEWALK, WHERE THE SIDEWALK IS CONSTRUCTED ADJACENT-TO PAVEMENT OR CURB HAVING EXPANSION JOINTS, THE EXPANSION JOINTS IN THE SIDEWALK SHALL BE PLACED OPPOSITE THE EXISTING EXPANSION JOINTS AS NEARLY AS PRACTICABLE. EXPANSION JOINTS SHALL ALSO BE PLACED WHERE THE SIDEWALK ABUTS EXISTING SIDEWALKS, BETWEEN DRIVEWAY PAVEMENT AND SIDEWALK, AND BETWEEN SIDEWALK ABUTS A CURB.

PORTLAND CEMENT CONCRETE SIDEWALK DETAILS

NOTES: NO EXTRA COMPENSATION SHALL BE ALLOWED FOR THE GUTTER FLARE

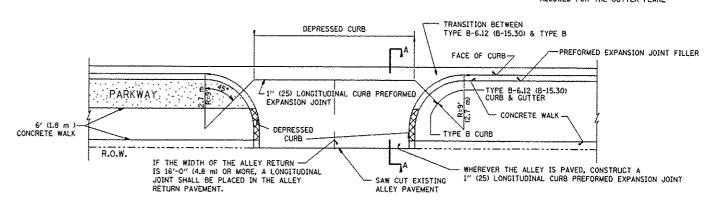

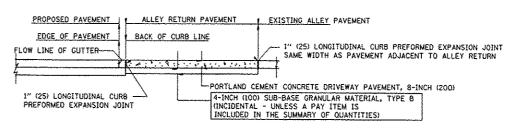

SECTION A-A

ALLEY RETURN DETAIL

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN

FILE NAME =	USER NAME = curryaw	DESIGNED - M. DE YONG	REVISED -
01/pr.work/pxidat/curryes/d8172364\P1698	29-Dasign.dgn	DRAWN -	REVISED -
	PLOT SCALE = 5000,0000 '/ in.	CHECKED -	REVISED -
	PLOT DATE = 6/15/2012	DATE - 06-13-90	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

-	CITY OF CHICAGO	RTE. SECTION COUNTY TOTAL SHEET NO.
-	DETAILS FOR P.C. CONCRETE DRIVEWAY, ALLEY RETURN AND SIDEWALK	VARIOUS 2012-042-1 COOK 20 18 BD400-03 (BD-17) CONTRACT NO. 60V31
	SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.	BD400-03 (BD-17) CONTRACT NO. 60V31 FEO. ROAD DIST, NO. 1 ILLINOIS FED. AID PROJECT