
CONTRACT NO. 60885

F.A. RTE.	SECTION	V	CC	UNT	Y	TOTAL	SHEET NO.
55	2006-03	BY	W	ILL		137	102
STA.	STA.		TO STA.				
FED. RO	DAD DIST, NO.	ILLIN	OIS FED.		AID	PROJECT	

24 m (80') O.C.  $\Leftrightarrow$ 


\*\*\* REDUCE TO 12 m (40') O.C. ON CURVES WITH POSTED OR ADVISORY SPEED 70 km/h (45 M.P.H.) OR LESS.

TWO-LANE/TWO-WAY

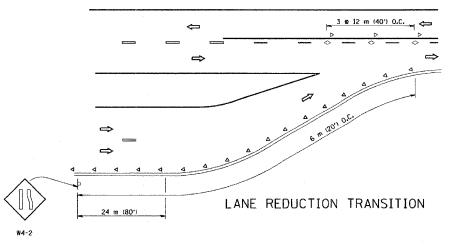


\_\_ 3 @ 24 m (80') O.C.

 $\Rightarrow$ 

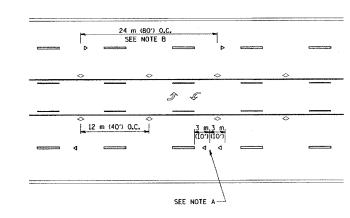


TWO-WAY LEFT TURN

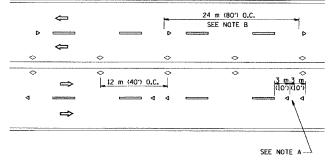

MULTI-LANE/UNDIVIDED

3 @ 12 m (40')

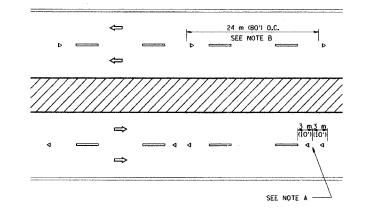

MULTI-LANE/DIVIDED

3 e 12 m (40')

## GENERAL NOTES

- MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 50 TO 75 (2 TO 3) TOWARD TRAFFIC AS SHOWN.
- 3. MARKERS THROUGH TANGENTS LESS THAN 150 m (500') IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

## LANE MARKER NOTES

- B. REDUCE TO 12 m (40") O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 20 km/h (10 M.P.H.) LOWER THAN POSTED SPEEDS.
- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.

## SYMBOLS

- --- YELLOW STRIPE
- WHITE STRIPE
- ☐ ONE-WAY AMBER MARKER
- TWO-WAY AMBER MARKER

## DESIGN NOTES

- 1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- 2. EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE LINES.
- 3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN THE PLANS.
- 4. MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

All dimensions are in millimeters (inches) unless otherwise shown.

REVISIO	NS	ILLINOIS DEPARTMENT OF TRANSPORTATION				
NAME	DATE	ILLINOIS DE ANTIQUENT OF THANSFORMATION				
T. RAMMACHER	09-19-94	TYDICAL ADDITOATIONS				
T. RAMMACHER	03-12-99					
T, RAMMACHER	01-06-00	RAISED REFLECTIVE PAVEMENT				
		MARKERS (SNOW-PLOW RESISTANT)				
	_					
		SCALE: NONE DRAWN BY CADD				
		DATE, 2 (15 (200))				

REVISION DATE: 01/06/00

3 @ 24 m (80') O.C.

⇔

12 m (40') 0.C.

LEFT TURN

12 m (40') 0.0

\* SEE TWO-LANE/TWO-WAY WHERE MARKERS CONTINUE \*\* WHERE THE MEDIAN WIDTH IS 2 m (6') OR LESS USE TWO-WAY MARKERS.

MINIMUM OF 3 W EQUALLY SPACED

O.C.