


EXISTING CONDITIONS:

- (A) P.C.C. PAVEMENT, 10" & VARIES
- (B) SUB-BASE GRANULAR MATERIAL, 4" & VARIES
- (C) COMBINATION CONCRETE CURB & GUTTER, TYPE B-6.24
- (C1) COMBINATION CONCRETE CURB & GUTTER, TYPE B-9.12
- (C2) COMBINATION CONCRETE CURB & GUTTER, TYPE B-6.12
- (D) P.C. CONCRETE MEDIAN, TYPE B-9.12
- (D1) P.C. CONCRETE MEDIAN, TYPE B-6.12
- (D2) P.C. CONCRETE MEDIAN SURFACE, 4"
- (E) TIE BARS

PROPOSED IMPROVEMENTS:

- (1) P.C.C. SURFACE REMOVAL (VARIABLE DEPTH), 0" TO 1 1/2" MAX.
- (2) POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90, 1 3/4"
- (3) POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, 3/4"
- (4) COMB. CONC. CURB AND GUTTER REMOVAL AND REPLACEMENT (LOCATION AS DETERMINED BY THE ENGINEER)
- (5) AGGREGATE WEDGE SHOULDER, TYPE B
- (6) LONGITUDINAL JOINT REPAIR (LOCATION AS DETERMINED BY THE ENGINEER)

LONGITUDINAL JOINTS SHALL BE REPAIRED AT LOCATIONS AS DIRECTED BY THE ENGINEER. SEE DETAIL BELOW.

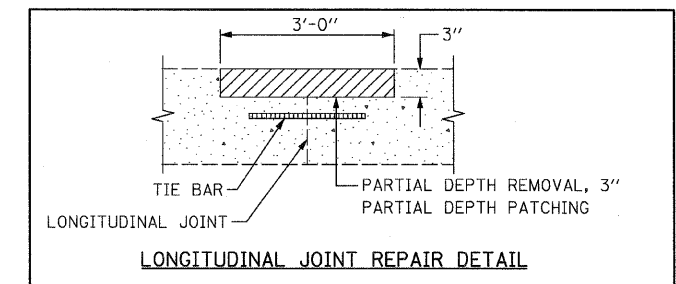

FILE NAME = D160H14-sht-typical.dgn
PLOT DATE = 4/15/2009

CHRISTIAN-ROGE & ASSOCIATES, INC.
ENGINEERS-PLANNERS-SURVEYORS
211 WEST WACKER DRIVE
CHICAGO, ILLINOIS 60606
PHONE: (312)372-2023 FAX: (312)372-5274

DESIGNED - M.P.	REVISED -
DRAWN - B.K.	REVISED -
CHECKED - G.F.L.	REVISED -
DATE - APRIL 2009	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS
WILLOW ROAD (SOO LINE R.R. TO IL. RTE. 43)

SCALE: NONE SHEET NO. 2 OF 2 SHEETS STA. TO STA.

F.A.P. RTE. 305	SECTION 1518 RS-2	COUNTY COOK	TOTAL SHEETS 19	SHEET NO. 5
CONTRACT NO. 60H14				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				