


## DETAIL STONE RIPRAP DITCH

(ON EXISTING PAVED DITCH)

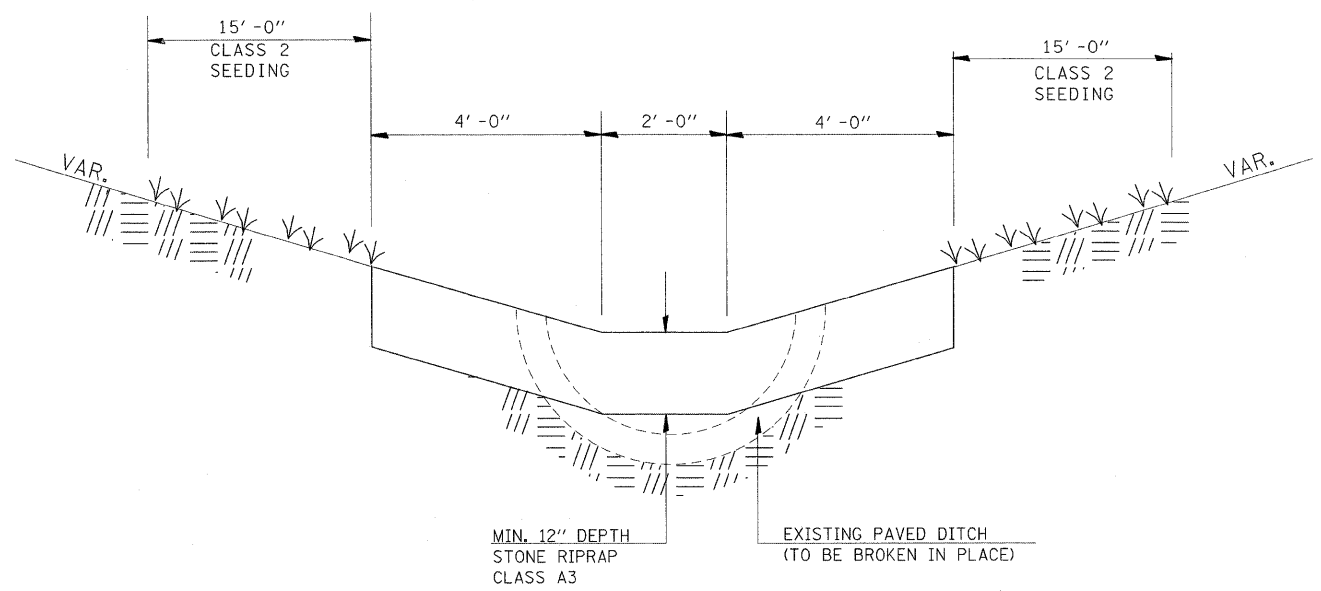

**NOTES:** THIS WORK SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE PER TON, FOR **STONE RIPRAP DITCH**, WHICH PRICE SHALL INCLUDE ALL MATERIAL LABOR AND EQUIPMENT TO COMPLETE THE WORK IN PLACE AS SHOWN AND DETAILED IN THE SPECIAL PROVISIONS. THE FINISHED SIDE SLOPES OF THE STONE RIPRAP DITCH SHALL MATCH THE EXISTING GRADE.

**TO BE USED:**  
SEE RIPRAP SCHEDULE

FILE NAME =	USER NAME = naasdp	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>DETAILS: STONE RIPRAP DITCH</b>	F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
es:\pw_work\PW\DOT\NAASDP\123680\78118	sht-details.dgn	DRAWN -	REVISED -			57	77-(2,3)RS	PULASKI	17	16	
	PLOT SCALE = 2.0250' / IN.	CHECKED -	REVISED -			CONTRACT NO. 78051					
	PLOT DATE = 3/12/2009	DATE -	REVISED -			SCALE:	SHEET NO.	OF	SHEETS	STA.	TO STA.