

**DE068** 



## INLET PROTECTION DETAIL

"NOT TO SCALE"

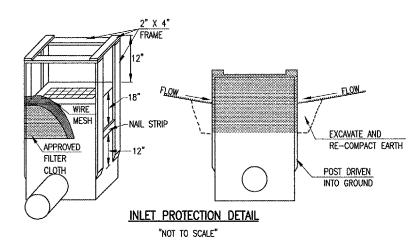

## **NOTES**

- 1. FILTER WRAP TO BE PLACED IN ALL PROPOSED AND EXISTING INLETS LOCATED IN PAVED AREAS.
- 2. FABRIC SHALL BE IN CONFORMANCE WITH MATERIALS SPECIFIED FOR EROSION CONTROL FENCING.
- 3. FABRIC SHALL OVERLAY FRAME BY 2" MIN.
- 4. THE CONTRACTOR SHALL CLEAR DEBRIS AND SILT AS REQUIRED FROM FABRIC TO MAINTAIN DRAINAGE THROUGH THE STRUCTURE.
- 5. FABRIC SHALL REMAIN IN PLACE UNTIL TURFED AREAS HAVE DEVELOPED A MIN. OF 80% COVERAGE.
- 6. INLET PROTECTION WILL NOT BE PAID FOR SEPARATELY BUT SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT AND NO ADDITIONAL COMPENSATION ALLOWED.

## **LEGEND**

EXISTING PAVEMENT PROPOSED BITUMINOUS PAVEMENT --- EXISTING STORM SEWER PROPOSED INLET PROTECTION

EXISTING INLET

FULL SIZE SCALE: 1"= 50' HALF SIZE SCALE: 1"= 100'

HANSON