| FRAME EXTENSION INTO PAVEMENT | INNER HOOP REINFORCEMENT DIAMETER | SEMI CIRCULAR FORM DIAMETER | OUTER HOOP REINFORCEMENT DIAMETER |
|----------------------------------|---|--------------------------------|---|
| UP TO 8" (200) | 3'-6" (1.1 m) | 4'-0'' (1 <u>.</u> 2 m) | 5'-0" (1.5 m) |
| > 8" (200) TO 14" (360) | 4'-0'' (1 . 2 m) | 4'-6'' (1.4 m) | 5′-0′′ (1.5 m) |

DESIGNER NOTE: THIS DETAIL IS TO BE USED | WHEN THE GUTTER FLAG IS LESS THAN 24"

LEGEND:

DESIGNED -

CHECKED - A. ABBAS

DRAWN

DATE

USER NAME = gaglianobt

PLOT SCALE = 50.0000 '/ IN.

PLOT DATE = 1/4/2008

A. ABBAS

- 01-04-99

TOM MATOUSEK

REVISED

- T. MATOUSEK 08-28-00

- T. MATOUSEK 10-02-00

REVISED - T. MATOUSEK 04-25-02

REVISED - P. LAFLEUR 08-27-02

FILE NAME =

W:\diststd\22x34\bd48.dgn

NOTES:

- 1. THE ROUNDOUT AND ADDED REINFORCEMENT WILL NOT BE PAID SEPARATELY, BUT SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE FOR THE PAVEMENT.
- 2. TRANSVERSE JOINTS MAY BE MOVED TO ACCOMMODATE ROUNDOUT, EDGE OF CIRCULAR JOINT SHALL BE MINIMUM 12" (300) FROM TRANSVERSE JOINT. RELOCATED TRANSVERSE JOINT SHALL BE CONTINUOUS FROM EDGE OF PAVEMENT TO EDGE OF PAVEMENT.
- 3. SEMI-CIRCULAR FORM SHALL BE REMOVED PRIOR TO DRILL AND GROUT OF TIE BARS.
- 4. ALL REINFORCED BARS SHALL BE EPOXY COATED.
- 5. DRILL AND GROUT IS PREFERRED, HOWEVER TIE BARS CAN BE POURED IN PLACE IF CLEARANCE IS PROVIDED TO OUTER EDGE OF FRAME. MINIMUM 2" (50) CLEARANCE.
- 6. WOOD SHIMS SHALL BE USED TO ADJUST ALL FRAMES. AFTER ADJUSTING MORTAR HAS CURED, THE WOOD SHIMS SHALL BE REMOVED AND THE VOIDS UNDER THE FRAMES FILLED WITH NON SHRINK GROUT.

SECTION

BD-48

(113R-2)N

FED. ROAD DIST. NO. 1 | ILLINOIS | FED. AID PROJECT

COUNTY

WILL

CONTRACT NO. 60T95

38 | 25

- 7. HOOP REINFORCEMENT SHALL BE ONE PIECE CONSTRUCTION.
- 8. CIRCULAR FRAMES AND GRATES MAY BE SUBSTITUTED.
- 9. CURB DOWELS MUST BE PLACED LEVEL & TRUE TO ALLOW CONTRACTION MOVEMENT.


PCC PAVEMENT ROUNDOUTS AT

CURB AND GUTTER

TO STA.

SHEET NO. 1 OF 1 SHEETS STA.

SCALE: NONE

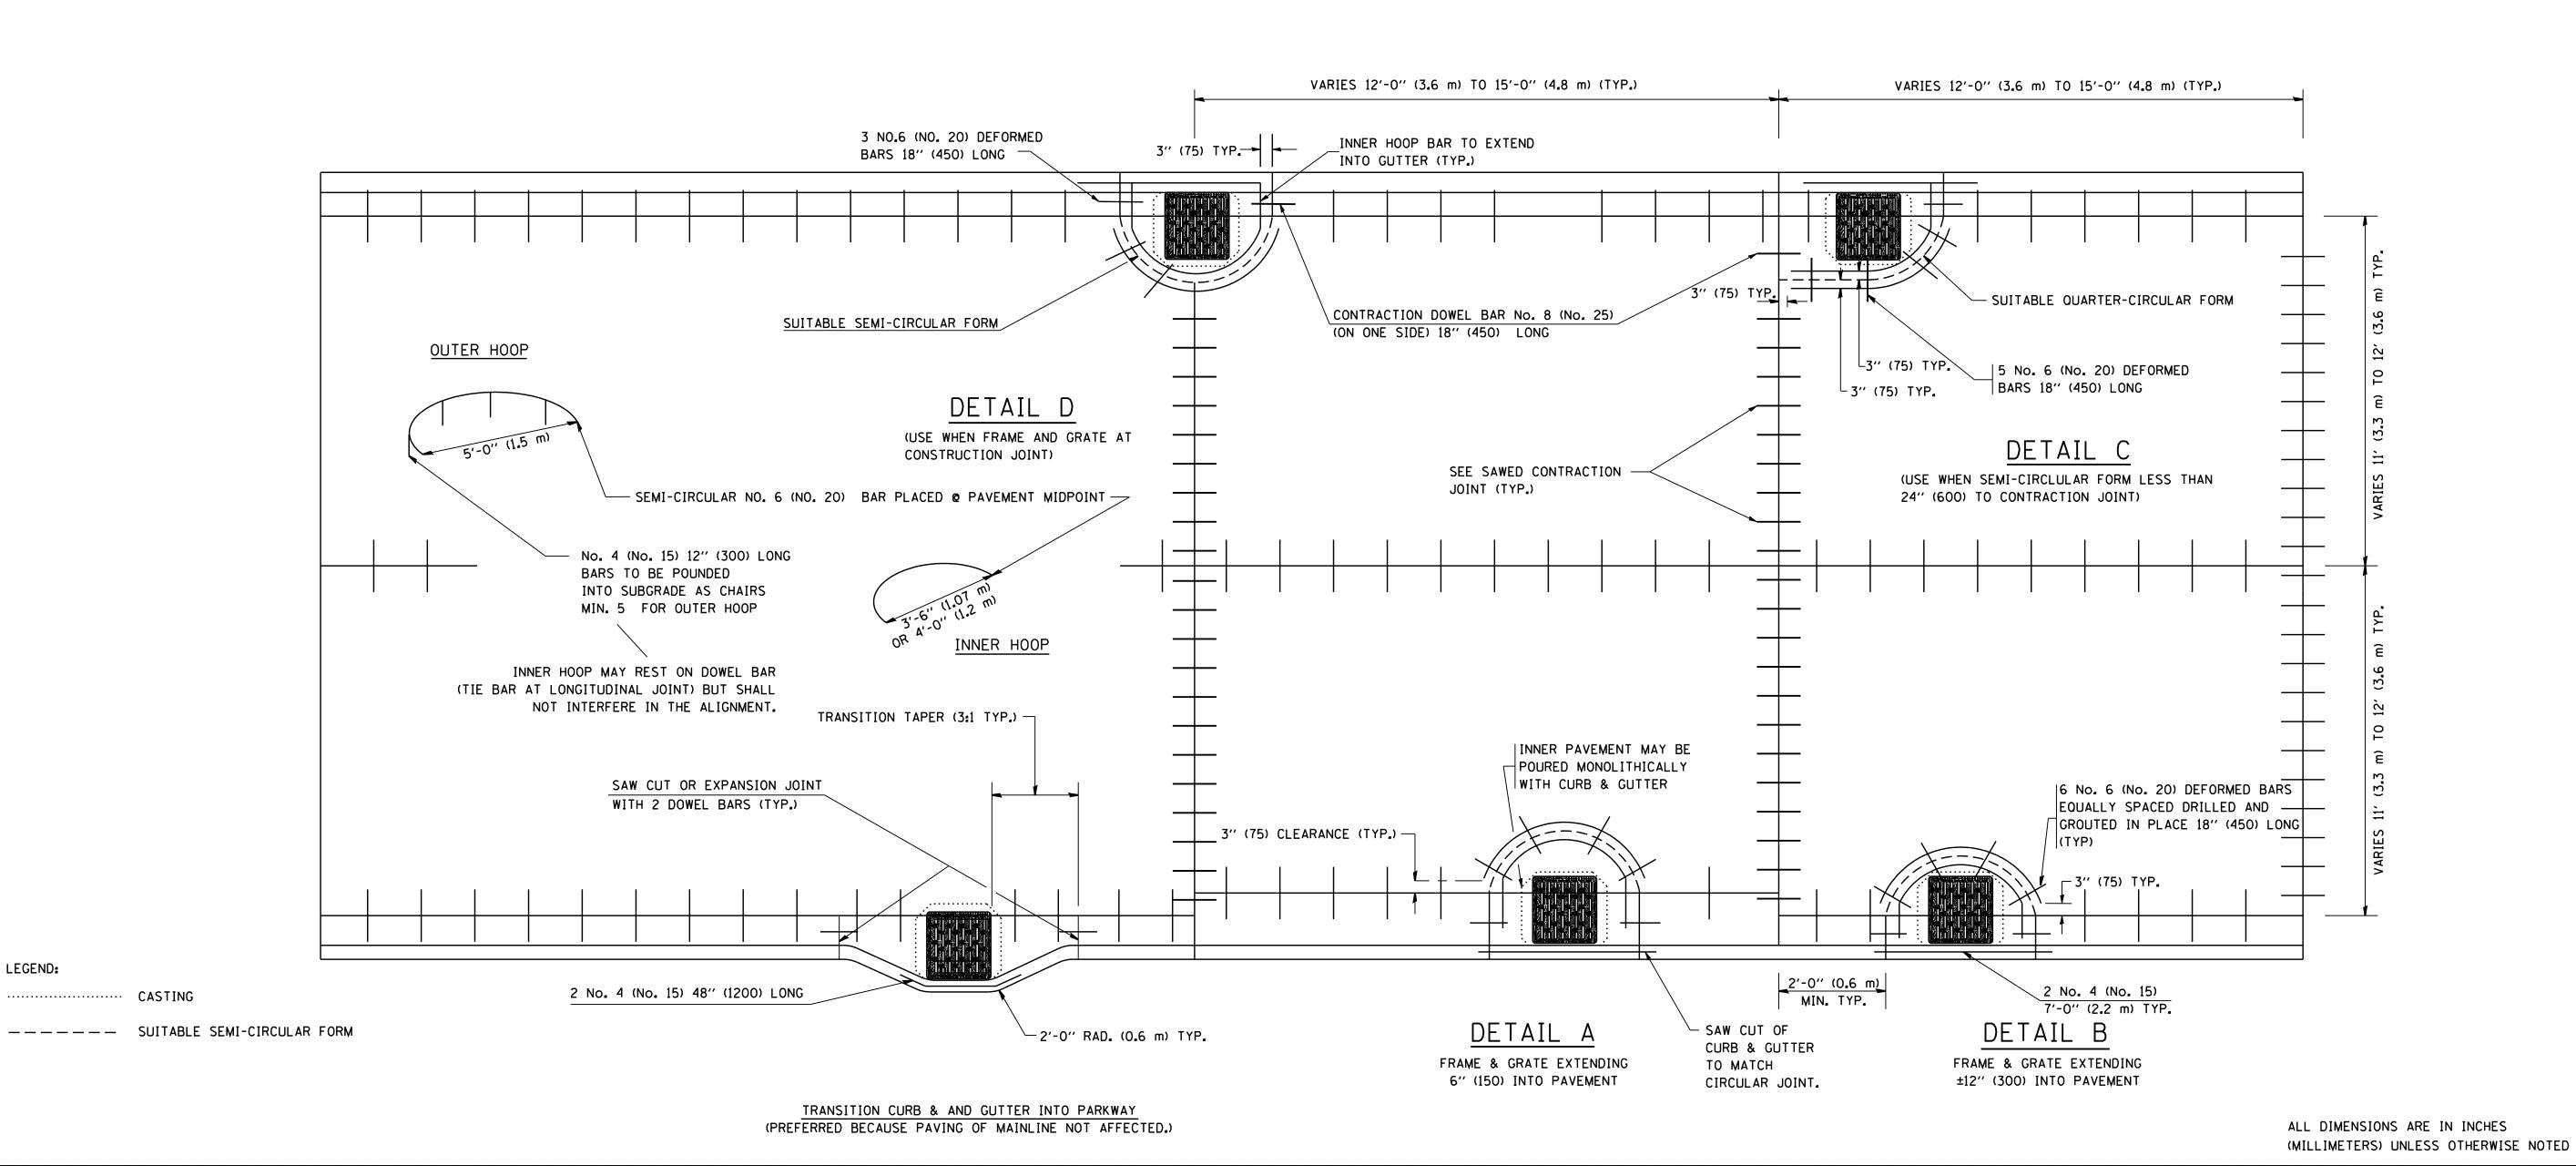

STATE OF ILLINOIS

DEPARTMENT OF TRANSPORTATION