

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BEAM B10


Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection
Bk. W. Abut.	3607+96.62	6.01	647.63	647.63
W. Abut.	3607+98.11	5.99	647.64	647.64
A	3608+08.07	5.90	647.70	647.70
B	3608+18.03	5.82	647.76	647.76
C	3608+27.98	5.75	647.82	647.82
D	3608+37.94	5.69	647.88	647.88
W. Brg.	3608+43.91	5.65	647.91	647.91
Pier 1	3608+44.91	5.65	647.91	647.91
E. Brg.	3608+45.91	5.64	647.92	647.92
E	3608+54.87	5.60	647.97	648.01
F	3608+64.82	5.56	648.02	648.09
G	3608+74.78	5.52	648.07	648.17
H	3608+84.74	5.50	648.12	648.24
I	3608+94.70	5.49	648.17	648.30
J	3609+04.65	5.48	648.22	648.36
K	3609+14.61	5.48	648.27	648.40
L	3609+24.57	5.49	648.31	648.43
M	3609+34.52	5.51	648.36	648.46
N	3609+44.48	5.54	648.40	648.48
O	3609+54.44	5.58	648.44	648.49
W. Brg.	3609+67.38	5.64	648.49	648.49
Pier 2	3609+68.38	5.65	648.50	648.50
E. Brg.	3609+69.37	5.65	648.50	648.50
P	3609+78.33	5.70	648.54	648.54
Q	3609+88.29	5.77	648.57	648.57
R	3609+98.25	5.85	648.61	648.61
S	3610+08.20	5.93	648.64	648.64
E. Abut.	3610+15.17	5.99	648.67	648.67
Bk. E. Abut.	3610+16.67	6.01	648.67	648.67

BEAM B11

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection
Bk. W. Abut.	3607+96.69	13.30	647.74	647.74
W. Abut.	3607+98.18	13.29	647.75	647.75
A	3608+08.13	13.20	647.81	647.81
B	3608+18.08	13.11	647.87	647.87
C	3608+28.03	13.04	647.93	647.93
D	3608+37.98	12.98	647.99	647.99
W. Brg.	3608+43.95	12.94	648.02	648.02
Pier 1	3608+44.95	12.94	648.02	648.02
E. Brg.	3608+45.94	12.93	648.03	648.03
E	3608+54.90	12.89	648.08	648.12
F	3608+64.85	12.85	648.13	648.20
G	3608+74.80	12.82	648.18	648.28
H	3608+84.75	12.79	648.23	648.35
I	3608+94.70	12.78	648.28	648.41
J	3609+04.65	12.77	648.33	648.47
K	3609+14.60	12.77	648.38	648.51
L	3609+24.56	12.79	648.42	648.54
M	3609+34.51	12.81	648.47	648.57
N	3609+44.46	12.83	648.51	648.59
O	3609+54.41	12.87	648.55	648.60
W. Brg.	3609+67.34	12.93	648.60	648.60
Pier 2	3609+68.34	12.94	648.61	648.61
E. Brg.	3609+69.33	12.94	648.61	648.61
P	3609+78.29	13.00	648.65	648.65
Q	3609+88.24	13.06	648.68	648.68
R	3609+98.19	13.14	648.72	648.72
S	3610+08.14	13.22	648.75	648.75
E. Abut.	3610+15.11	13.29	648.78	648.78
Bk. E. Abut.	3610+16.60	13.30	648.78	648.78


BEAM B12

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection
Bk. W. Abut.	3607+96.76	20.59	647.85	647.85
W. Abut.	3607+98.25	20.58	647.86	647.86
A	3608+08.19	20.49	647.92	647.92
B	3608+18.14	20.41	647.98	647.98
C	3608+28.08	20.33	648.04	648.04
D	3608+38.03	20.27	648.09	648.09
W. Brg.	3608+43.99	20.24	648.13	648.13
Pier 1	3608+44.99	20.23	648.13	648.13
E. Brg.	3608+45.98	20.22	648.14	648.14
E	3608+54.93	20.18	648.19	648.23
F	3609+64.88	20.14	648.20	648.27
G	3608+74.82	20.11	648.29	648.39
H	3608+84.77	20.08	648.34	648.46
I	3608+94.71	20.07	648.39	648.52
J	3609+04.66	20.06	648.44	648.58
K	3609+14.60	20.07	648.49	648.62
L	3609+24.54	20.08	648.53	648.65
M	3609+34.49	20.10	648.58	648.68
N	3609+44.43	20.13	648.62	648.70
O	3609+54.38	20.16	648.66	648.71
W. Brg.	3609+67.31	20.22	648.71	648.71
Pier 2	3609+68.30	20.23	648.72	648.72
E. Brg.	3609+69.29	20.24	648.72	648.72
P	3609+78.24	20.29	648.75	648.75
Q	3609+88.19	20.35	648.79	648.79
R	3609+98.13	20.43	648.83	648.83
S	3610+08.08	20.51	648.86	648.86
E. Abut.	3610+15.04	20.58	648.89	648.89
Bk. E. Abut.	3610+16.53	20.59	648.89	648.89



To determine "f": After all precast prestressed beams have been erected, elevations of the top flanges of the beams shall be taken at intervals shown below. These elevations subtracted from the "Theoretical Grade Elevations Adjusted for Dead Load Deflections" shown below, minus slab thickness, equals the fillet heights "f" above top flanges of beams.

FILLET HEIGHTS

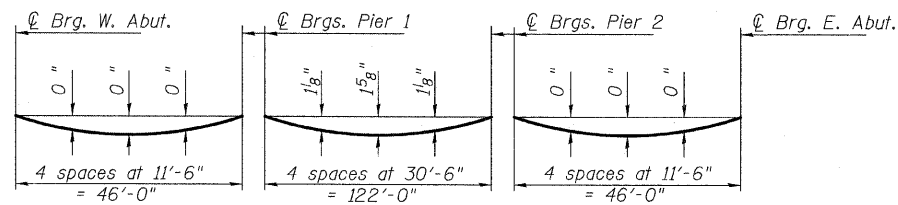

DEAD LOAD DEFLECTION DIAGRAM

Note: (Includes weight of concrete, excluding beams).
The above deflections are not to be used in the field if the engineer is working from the grade elevations adjusted for dead load deflections as shown below.

DESIGNED	IM
CHECKED	PDF
DRAWN	IM
CHECKED	PDF

TOP OF SLAB ELEVATIONS - II
STRUCTURE NO. 006-0174 (EB)

SHEET NO. 6	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	80	*	BUREAU	344	204
39 SHEETS	FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		CONTRACT NO. 66908

TYLIN INTERNATIONAL