



NOTE:  
 PAVEMENT SECTION FOR DELEVAN ST, MEADOW LN, AND CLAREMONT CT:  
 -POLYMERIZED HOT MIX ASPHALT SURFACE COURSE, MIX E, N90 2"  
 -HOT-MIX ASPHALT BINDER COURSE, IL-19, N90, 2 1/4"  
 -AGGREGATE BASE COURSE, TYPE A, 8"

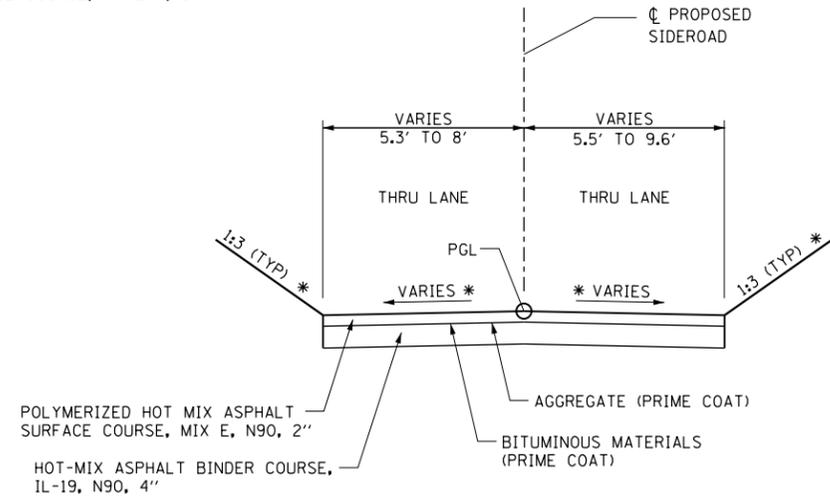

**TYPICAL SECTION - SIDEROADS**


- ALLEY @ STA 168+75.37 STA 0+00.00 TO STA 1+00.00
- ALLEY @ STA 190+65.00 STA 0+00.00 TO STA 1+26.00
- ALLEY @ STA 193+03.40 STA 0+00.00 TO STA 0+96.00
- ALLEY @ STA 194+20.09 STA 0+00.00 TO STA 0+86.00
- ALLEY @ STA 196+76.00 STA 0+00.00 TO STA 0+67.00
- ALLEY @ STA 199+96.02 STA 0+00.00 TO STA 0+57.00
- ALLEY @ STA 223+94.02 STA 0+00.00 TO STA 1+00.00

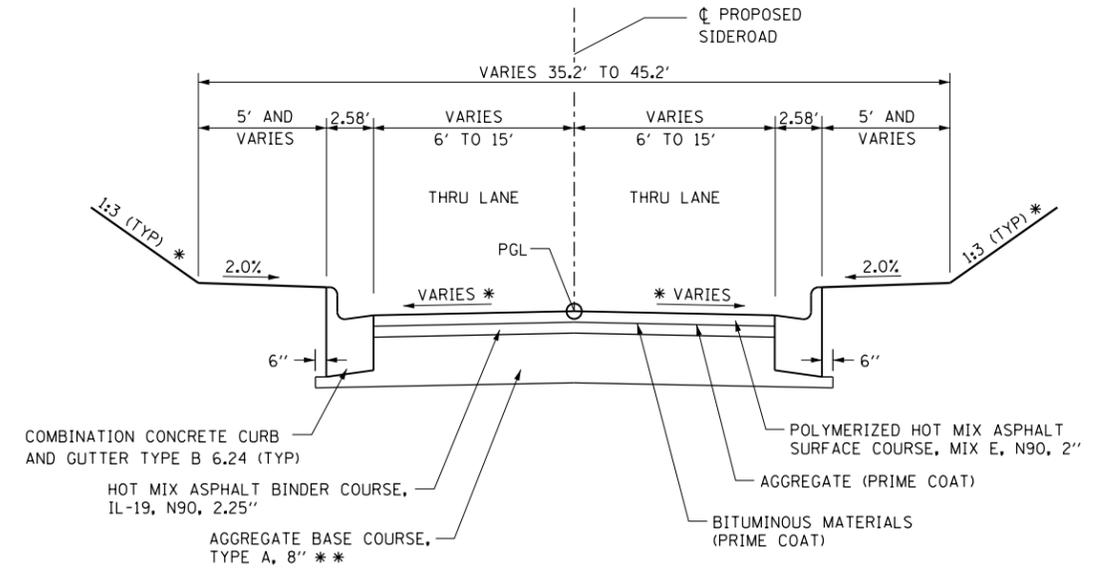

**TYPICAL SECTION - SIDEROADS**


- VALLEY AVE. STA 0+00.00 TO STA 1+20.00
- VALLEY LN STA 0+00.00 TO STA 1+65.00
- WADSWORTH ST. STA 0+00.00 TO STA 0+70.00
- REBECCA AVE. STA 0+00.00 TO STA 1+10.00
- UNION AVE. STA 0+00.00 TO STA 1+60.00

NOTE:  
 - DEPRESSED CURB AT ENTRANCES

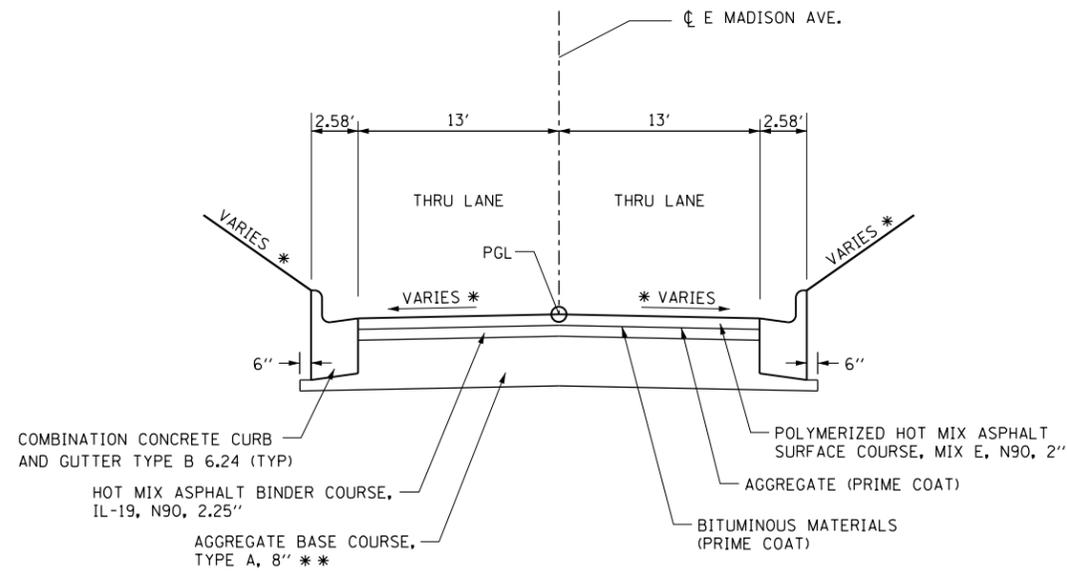

**TYPICAL SECTION - E. MADISON AVE**

STA 0+00.00 TO STA 2+07.00

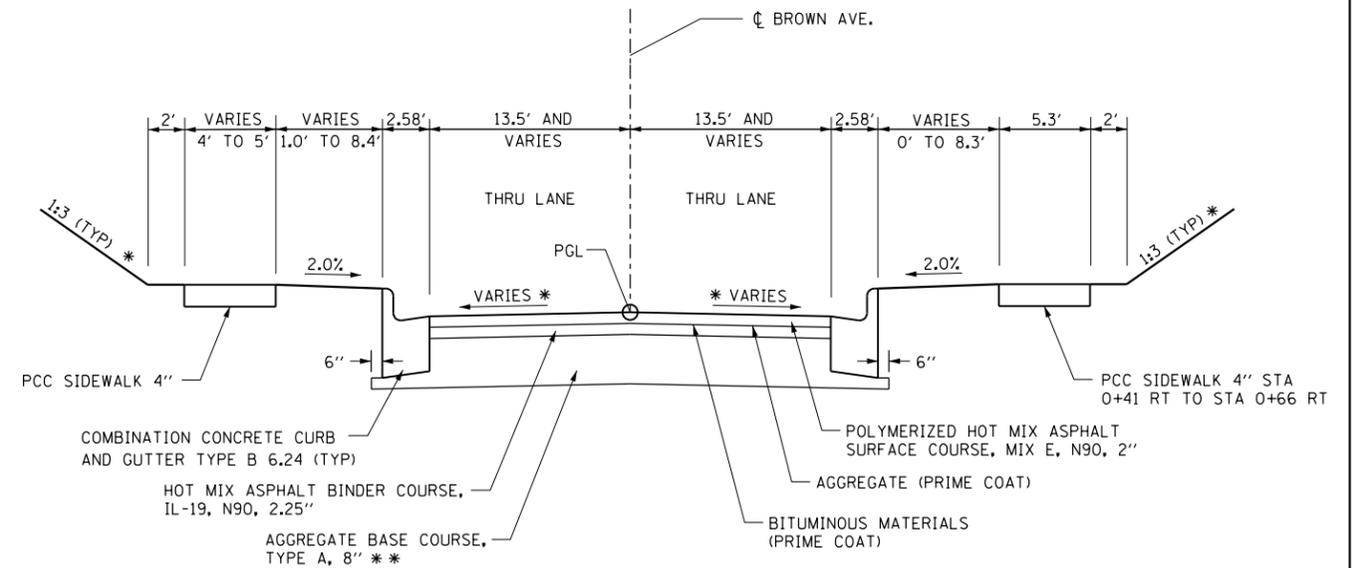

**TYPICAL SECTION - BROWN AVE.**

STA 0+00.00 TO STA 0+90.00

\* SEE CROSS SECTIONS AND/OR INTERSECTION DETAILS FOR SLOPE  
 \*\* DEPTH SHOULD BE FIELD VERIFIED WITH A DCP AND ADJUSTED ACCORDINGLY. MINIMUM THICKNESS IS SHOWN ON TYPICAL SECTION.

FILE NAME =	USER NAME = default	DESIGNED - CLS	REVISED -
P:\Projects\513501\CADD\DN\0876885-sh1	typical.dgn	DRAWN - AGF	REVISED -
	PLOT SCALE = 100.0000' / 1in.	CHECKED - MAM	REVISED -
	PLOT DATE = 1/25/2013	DATE - 01/25/2013	REVISED -

**STATE OF ILLINOIS  
 DEPARTMENT OF TRANSPORTATION**

**PROPOSED TYPICAL SECTIONS  
 SIDE ROADS**

SCALE: N/A SHEET NO. 5 OF 10 SHEETS STA. N/A TO STA. N/A

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
600	60-(30,31,128)-3	MADISON	529	29
CONTRACT NO. 76885				
ILLINOIS FED. AID PROJECT				