
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

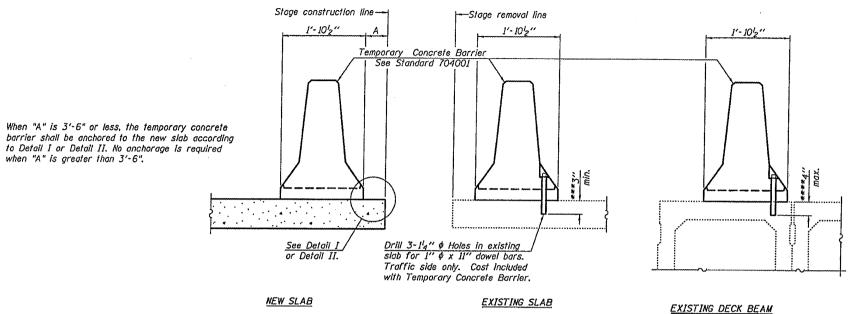

NOTES

Detail I - With Bar Splicer or Couplers: Connect one (1) 1"x7"x10" steel R to the top layer of couplers with $2^{-5}8$ " ϕ boits screwed to coupler at approximate ℓ of each barrier panel.

Detail II - With Extended Reinforcement Bars:
Connect one (I) 1"x7"x 10" steel £ to the concrete slab or concrete wearing surface with 2-58" \$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate & of each barrier panel.


Cost of anchorage is included with Temporary Concrete Barrier.

The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready


SECTIONS THRU SLAB OR DECK BEAM


- *** Dimension shown is minimum required embedment into concrete.

 If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.
- **** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

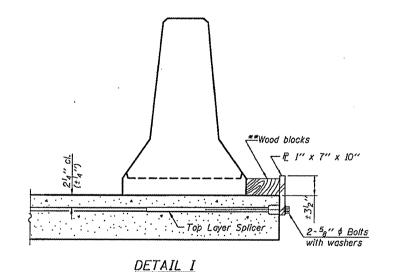

when "A" is greater than 3'-6".

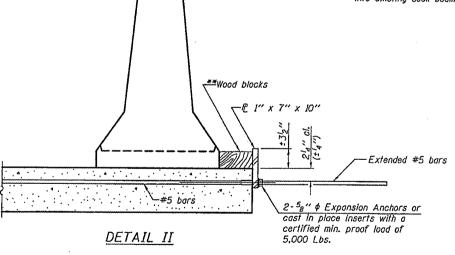

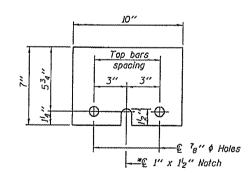

STEEL RETAINER & 1" x 7" x 10"

* Required only with Detail II

TEMPORARY CONCRETE BARRIER **US RTE 150 OVER I-74** SN 057-0073

SHEET NO. 7	F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.			
	2466	(57-18)BJR	MC LEAN	17	17			
7 SHEET	's		CONTRACT	NO. 70	807			
	FED. F	FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT						

**Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blacks are amilted, the concrete barrier shall be in direct contact with the steel retainer plate.

			3
DESIGNED		GGE	SEPTEMBER 16, 2009
CHECKED		AJB	EXAMINED & Carl Prayey
DRAWN		baliva	PASSED Ralph E. andless
CHECKED	GGE	AJB	ENGINEER OF BRIDGES AND STRUCTURES
0.07			

R-27 10-1-08

0070070 --- D/40/0000 0. CC. 40 AM