


SEQUENCE OF CONSTRUCTION
(Coordinate work with Roadway Staging plans)

- Excavate behind wall to the limits shown on the plans
- Remove and reconstruct top of existing Retaining Wall.
- Backfill with approved Lightweight Cellular Concrete Fill in lifts not exceeding two (2) feet.
- Place Sub-Base Granular Material, Type B, Stabilized Sub-Base and construct Moment Slab and Parapet.
- Construct Pavement.

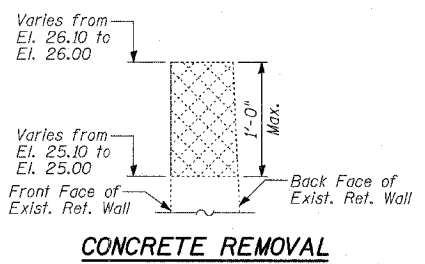

BILL OF MATERIAL

ITEM	UNIT	TOTAL
Concrete Removal	CU YD	5
Structure Excavation	CU YD	821
Lightweight Cellular Concrete Fill	CU YD	987

NOTES:

- Lightweight Cellular Concrete Fill shall be placed in layers not exceeding 2 feet in thickness.

LEGEND

- Concrete Removal
- F.F. denotes Front Face of Wall.

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
F.A.I. 94 (DAN RYAN EXPRESSWAY)

WALL C MODIFICATIONS SECTIONS AND DETAILS

S.N. _____ DESIGNED BY: TD, DJR
SCALE: _____ DRAWN BY: DJR
DATE: MARCH 7, 2006 CHECKED BY: MI