

06-10-2016 LETTING ITEM 154

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

**PROPOSED
HIGHWAY PLANS**

VARIOUS ROUTES
SECTION D9 GUARDRAIL END SECT FY16-1
PROJECT ACHSIP-000V(070)
GUARDRAIL END SECTION REPLACEMENT
VARIOUS COUNTIES

FOR INDEX OF SHEETS, SEE SHEET NO. 3


VARIOUS LOCATIONS

ROUTE

INTERSTATE 24
INTERSTATE 57
INTERSTATE 64
ILLINOIS ROUTE 1
ILLINOIS ROUTE 13
ILLINOIS ROUTE 148
ILLINOIS ROUTE 149
US ROUTE 45

COUNTY

JOHNSON & MASSAC COUNTIES
ALEXANDER, JEFFERSON, & WILLIAMSON COUNTIES
JEFFERSON COUNTY
GALLATIN, HARDIN, & WHITE COUNTIES
GALLATIN, JACKSON, SALINE, & WILLIAMSON COUNTIES
JEFFERSON & WILLIAMSON COUNTIES
FRANKLIN COUNTY
JOHNSON, MASSAC, SALINE, & WHITE COUNTIES

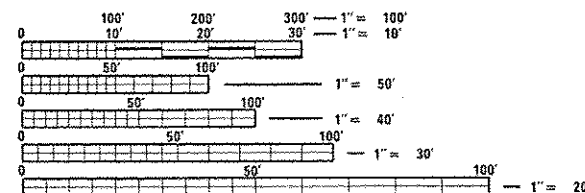


FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER LISA PRITCHETT (618)549-2171
PROJECT MANAGER CHARLES STEIN (618)351-5210

CONTRACT NO. 78525

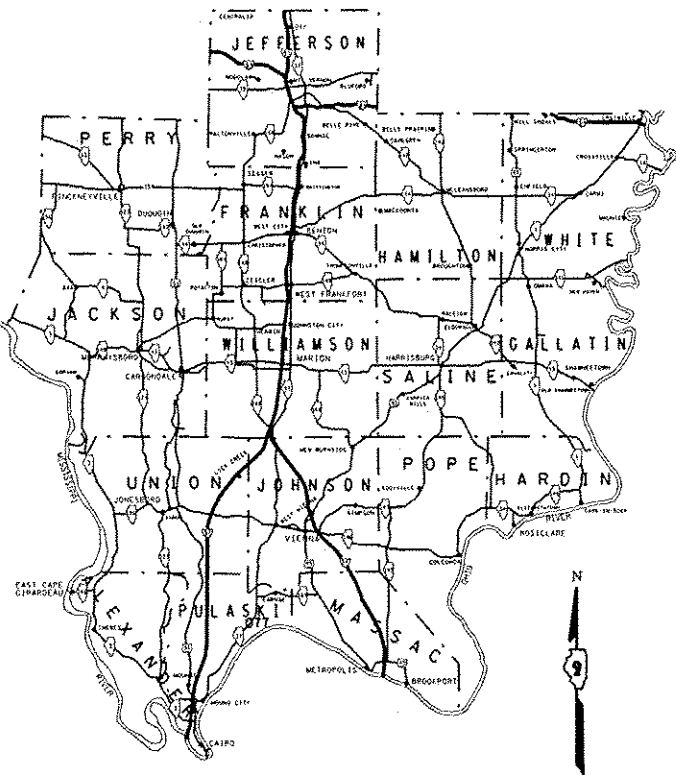

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	**	VARIOUS	16	1
ILLINOIS			CONTRACT NO. 78525	

• VARIOUS
• D9 GUARDRAIL END SECT FY16-1

D-99-027-16



LOCATION OF SECTION INDICATED THUS: —

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED March 18, 2016
Jeffrey L. Kinn REGION FIVE ENGINEER
May 6, 2016
Mauden M. Addis P.E. ENGINEER OF DESIGN AND ENVIRONMENT
May 6, 2016
Director of Program Development 2

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

Prepared By:

[Signature]
DISTRICT STUDIES & PLANS ENGINEER

Examined By:

[Signature]
DISTRICT LAND ACQUISITION ENGINEER

Examined By:

[Signature]
DISTRICT PROGRAM DEVELOPMENT ENGINEER

Examined By:

[Signature]
DISTRICT OPERATIONS ENGINEER

Examined By:

[Signature]
DISTRICT PROJECT IMPLEMENTATION ENGINEER

Examined By:

[Signature]
DISTRICT CONSTRUCTION ENGINEER

Examined By:

[Signature]
DISTRICT MATERIALS ENGINEER

FILE NAME: \\ILL04E010NTEG\illinois\go\WIDOT\...		USER NAME: pritchestil	DESIGNED: -	REVISED: -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SIGNATURE SHEET				* VARIOUS ** D9 GUARDRAIL END SECT FY16-1							
DRAWN: \\ILL04E010NTEG\illinois\go\WIDOT\...		PROJECT: 1201 Office District 9 Projects 785	CHECKED: -	REVISED: -		SCALE: 1"=40'	SHEET	OF	SHEETS	STA.	TO STA.	F.A. R.T.E.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
PLOT SCALE: 1"=40'		PLOT DATE: 3-8-2016	DATE: -	REVISED: -											VARIOUS	16	2
MODEL NAME: -															CONTRACT NO. 78525		

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	COVER SHEET
2	SIGNATURE SHEET
3	INDEX OF SHEETS, STANDARDS, COMMITMENTS, GENERAL NOTES
4 - 5	SUMMARY OF QUANTITIES
6 - 11	GUARDRAIL SCHEDULE
12 - 16	STRUCTURE MAPS

GENERAL NOTES

EARTHWORK COMPACTION SHALL BE TO THE SATISFACTION OF THE ENGINEER.

GUARDRAIL REMOVAL SHALL NOT BE SALVAGED BY THE DISTRICT.

STANDARDS

000001-06	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
630001-10	STEEL PLATE BEAM GUARDRAIL
630301-06	SHOULDER WIDENING FOR TYPE 1 (SPECIAL) GUARDRAIL TERMINALS
701006-05	OFF-RD OPERATIONS, 2L, 2W, 15' TO 24" FROM PAVEMENT EDGE
701011-04	OFF-RD MOVING OPERATIONS, 2L, 2W, DAY ONLY
701101-05	OFF-RD OPERATIONS MULTILANE, 15' TO 24" FROM PAVEMENT EDGE
701201-04	LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS $\geq$ 45 MPH
701301-04	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701400-08	APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
701406-10	LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
701421-07	LANE CLOSURE, MULTILANE, DAY OPERATIONS ONLY, FOR SPEEDS $\geq$ 45 MPH TO 55MPH
701428-01	TRAFFIC CONTROL SETUP AND REMOVAL FREEWAY/EXPRESSWAY
701456-03	PARTIAL EXIT RAMP CLOSURE FREEWAY/EXPRESSWAY
701602-07	URBAN LANE CLOSURE, MULTILANE, 2W WITH BIDIRECTIONAL LEFT TURN LANE
701901-05	TRAFFIC CONTROL DEVICES
725001	OBJECT AND TERMINAL MARKERS
782006	GUARDRAIL AND BARRIER WALL REFLECTOR MOUNTING DETAILS

										• VARIOUS •• D9 GUARDRAIL END SECT FY16-1			
FILE NAME =	USER NAME = pritchettll	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS, GENERAL NOTES STANDARDS, SIGNATURE BLOCK				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
p:\11\0846BID\INTEG.illinois.gov\FWIDOT\Documents\IDOT Offices\District 9\Projects\782006\782006-std.dgn		CHECKED -	REVISED -						*	**	VARIOUS	16	3
PLOT SCALE = 100.0000' / 1" = 1'		CHECKED -	REVISED -		CONTRACT NO. 78525								
PLOT DATE = 3/18/2016		DATE -	REVISED -		ILLINOIS FED. AID PROJECT								
Default					SCALE:	SHEET	OF	SHEETS	STA.	TO	STA.		

SUMMARY OF QUANTITIES

COUNTY: Various Counties
ROUTE: Various Routes, Various Routes
FUNDING: 90 % FEDERAL 10 % STATE
LOCATION: RURAL
ROADWAY
0021

CODE NUMBER	ITEM DESCRIPTION	UNIT	
63000003	STEEL PLATE BEAM GUARDRAIL, TYPE A, 9 FOOT POSTS	FOOT	2,850
63100085	TRAFFIC BARRIER TERMINAL, TYPE 6	EACH	14
63100167	TRAFFIC BARRIER TERMINAL, TYPE 1 (SPECIAL) TANGENT	EACH	200
63200310	GUARDRAIL REMOVAL	FOOT	11,266
64300260	IMPACT ATTENUATORS (FULLY REDIRECTIVE, NARROW), TEST LEVEL 3	EACH	2
67100100	MOBILIZATION	LSUM	1
70100310	TRAFFIC CONTROL AND PROTECTION, STANDARD 701421	LSUM	1
70100450	TRAFFIC CONTROL AND PROTECTION, STANDARD 701201	LSUM	1
70100700	TRAFFIC CONTROL AND PROTECTION, STANDARD 701406	LSUM	1
70102633	TRAFFIC CONTROL AND PROTECTION, STANDARD 701602	EACH	1
72501000	TERMINAL MARKER - DIRECT APPLIED	EACH	202
78200410	GUARDRAIL MARKERS, TYPE A	EACH	69

SUMMARY OF QUANTITIES - CON

COUNTY:	Various Counties
ROUTE:	Various Routes, Various Routes
FUNDING:	90 % FEDERAL 10 % STATE
LOCATION:	RURAL

CODE NUMBER	ITEM DESCRIPTION	UNIT	ROADWAY
			0021
X7010410	SPEED DISPLAY TRAILER	CAL MO	1

- * VARIOUS
- ** D9 GUARDRAIL END SECT FY16-1

FILE NAME =	USER NAME = prstshettell	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES				09 GUARDRAIL END SECT PT108-1			
pw\\IL064EBID\INTEG.illinois.gov\PI007\Documents\IDOT Offices\District 9\Projects\79525\Drawings\CAD\Sheets\79525-sht.dgn		REVISIONS	REVISED -						F.A. R.T.E.	SECTION	COUNTY	TOTAL SHEETS
					..			VARIOUS	16	5		
PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -			CONTRACT NO. 79525							
PLOT DATE = 3/10/2016	DATE	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		

GUARDRAIL SCHEDULE

	STEEL PLATE BEAM GUARDRAIL TYPE A, 9 FOOT POSTS	GUARDRAIL MARKERS, TYPE B	GUARDRAIL REMOVAL	IMPACT ATTENUATORS (FULLY REDIRECTIVE, NARROW)	TRAFFIC BARRIER TERMINAL , TYPE 1 (SPECIAL) TANGENT	TRAFFIC BARRIER TERMINAL , TYPE 6	TERMINAL MARKER - DIRECT APPLIED
	FOOT	EACH	FOOT	EACH	EACH	EACH	EACH
INTERSTATE 24 (JOHNSON COUNTY)							
MP 6.6 NWQ			50.0		1		1
MP 11.6 EB			50.0		1		1
MP 17.2 EB			50.0		1		1
SN 044-0050 WB			50.0		1		1
INTERSTATE 24 (MASSAC COUNTY)							
SN 064-0014 SWQ	162.5	4	137.5		1	1	1
SN 064-0015 NEQ	162.5	4	137.5		1	1	1
SN 064-0017 SWQ	162.5	4	137.5		1	1	1
SN 064-0018 NEQ	162.5	4	137.5		1	1	1
SN 064-0020 SWQ	162.5	4	137.5		1	1	1
SN 064-0021 NEQ	162.5	4	137.5		1	1	1
SN 064-0023 SWQ	162.5	4	112.5		1	1	1
SN 064-0024 NEQ	162.5	4	112.5		1	1	1
SN 064-0025 SWQ	162.5	4	112.5		1	1	1
SN 064-0026 NEQ	162.5	4	112.5		1	1	1
SN 064-0027 SWQ	162.5	4	112.5		1	1	1
SN 064-0028 NEQ	162.5	4	112.5		1	1	1
SN 064-0030 SWQ	162.5	4	137.5		1	1	1
SN 064-0031 NEQ	162.5	4	137.5		1	1	1
SN 064-0037 SEQ			52.2		1		1
SN 064-0037 SWQ			52.2		1		1
SN 064-0038 NEQ			52.2		1		1
SN 064-0038 NWQ			52.2		1		1
SUBTOTAL INTERSTATE 24							
	2,275.0	56	2,183.8	0	22	14	22
INTERSTATE 57 (ALEXANDER COUNTY)							
SN 002-0025 NB NEQ			50.0		1		1
SN 002-0025 SB SEQ			50.0		1		1
SN 002-0025 SB SWQ			50.0		1		1
INTERSTATE 57 (JEFFERSON COUNTY)							
SN 041-0025 SEQ			50.0		1		1
SN 061-0027 SEQ			50.0		1		1
MP 98.6 SB NWQ			50.0		1		1
INTERSTATE 57 (WILLIAMSON COUNTY)							
SN 100-0085 NWQ			50.0		1		1
EXIT 44 NEQ			50.0		1		1
MP 44.5 NB SEQ			50.0		1		1
MP 44.7 SB NWQ			50.0		1		1
Ramp onto I-57 from IL 13, NB SEQ			50.0		1		1
MP 61.6 NB SEQ			50.0		1		1
SUBTOTAL INTERSTATE 57							
	0.0	0	600.0	0	12	0	12

• VARIOUS
•• D9 GUARDRAIL END SECT FY16-1

FILE NAME = p:\11\084EBID\INTEG\illinois.gov\PWIDOT\Documents\IDOT Offices\District 9\Projects\78525\Drawings\CAD\Sheets\78525-sht.dgn Default	USER NAME = pritchettll	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	GUARDRAIL SCHEDULE			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
			REVISED -					*	**		16	6
	PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -		SCALE:			SHEET OF SHEETS STA. TO STA.			CONTRACT NO. 78525	
	PLOT DATE = 3/18/2016	DATE -	REVISED -					ILLINOIS FED. AID PROJECT				

GUARDRAIL SCHEDULE

	STEEL PLATE BEAM GUARDRAIL TYPE A, 9 FOOT POSTS	GUARDRAIL MARKERS, TYPE B	GUARDRAIL REMOVAL	IMPACT ATTENUATORS (FULLY REDIRECTIVE, NARROW)	TRAFFIC BARRIER TERMINAL , TYPE 1 (SPECIAL) TANGENT	TRAFFIC BARRIER TERMINAL , TYPE 6	TERMINAL MARKER - DIRECT APPLIED
	FOOT	EACH	FOOT	EACH	EACH	EACH	EACH
INTERSTATE 64 (JEFFERSON COUNTY)							
SN 041-0083 SEQ			50.0		1		1
SN 041-0086 SEQ			50.0		1		1
SUBTOTAL INTERSTATE 64	0.0	0	100.0	0	2	0	2
ILLINOIS 1 (GALLATIN COUNTY)							
SN 030-0018 NEQ			52.2		1		1
SN 030-0018 NWQ			52.2		1		1
SN 030-0018 SEQ			52.2		1		1
SN 030-0018 SWQ			52.2		1		1
SN 030-0019 NEQ			52.2		1		1
SN 030-0019 NWQ			52.2		1		1
SN 030-0019 SEQ			52.2		1		1
SN 030-0019 SWQ			52.2		1		1
SN 030-7008 NEQ			52.2		1		1
SN 030-7008 NWQ			52.2		1		1
SN 030-7008 SEQ			52.2		1		1
SN 030-7008 SWQ			52.2		1		1
ILLINOIS 1 (HARDIN COUNTY)							
SN 035-0001 NEQ			52.2		1		1
SN 035-0001 NWQ			52.2		1		1
SN 035-0001 SEQ			52.2		1		1
SN 035-0001 SWQ			52.2		1		1
SN 035-0002 NEQ			52.2		1		1
SN 035-0002 SEQ			52.2		1		1
SN 035-0002 SWQ			52.2		1		1
SN 035-0003 NEQ			52.2		1		1
SN 035-0003 NWQ			52.2		1		1
SN 035-0003 SWQ			52.2		1		1
SN 035-2000 NEQ			52.2		1		1
SN 035-2000 NWQ			52.2		1		1
SN 035-2000 SEQ			52.2		1		1
SN 035-2000 SWQ			52.2		1		1
SN 035-2003 NEQ			37.5		1		1
SN 035-2003 NWQ			37.5		1		1
SN 035-2003 SEQ			37.5		1		1
SN 035-2003 SWQ			37.5		1		1

- VARIOUS
- D9 GUARDRAIL END SECT FY16-1

GUARDRAIL SCHEDULE

		STEEL PLATE BEAM GUARDRAIL TYPE A, 9 FOOT POSTS	GUARDRAIL MARKERS, TYPE B	GUARDRAIL REMOVAL	IMPACT ATTENUATORS (FULLY REDIRECTIVE, NARROW)	TRAFFIC BARRIER TERMINAL , TYPE 1 (SPECIAL) TANGENT	TRAFFIC BARRIER TERMINAL , TYPE 6	TERMINAL MARKER - DIRECT APPLIED
		FOOT	EACH	FOOT	EACH	EACH	EACH	EACH
ILLINOIS 1 (HARDIN COUNTY)								
0.7 Miles South of Hardin/Gallatin Co Line	NEQ			50.0		1		1
0.7 Miles South of Hardin/Gallatin Co Line	SEQ			50.0		1		1
0.9 Miles South of Hardin/Gallatin Co Line	NEQ			50.0		1		1
0.9 Miles South of Hardin/Gallatin Co Line	SEQ			50.0		1		1
1.2 Miles South of Hardin/Gallatin Co Line	NEQ			50.0		1		1
1.2 Miles South of Hardin/Gallatin Co Line	NWQ			50.0		1		1
1.2 Miles South of Hardin/Gallatin Co Line	SEQ			50.0		1		1
1.2 Miles South of Hardin/Gallatin Co Line	SWQ			50.0		1		1
2.9 Miles South of Hardin/Gallatin Co Line	NEQ			50.0		1		1
2.9 Miles South of Hardin/Gallatin Co Line	SEQ			50.0		1		1
4.6 Miles South of Hardin/Gallatin Co Line	NEQ			50.0		1		1
4.6 Miles South of Hardin/Gallatin Co Line	SEQ			50.0		1		1
4.8 Miles South of Hardin/Gallatin Co Line	NEQ			50.0		1		1
4.8 Miles South of Hardin/Gallatin Co Line	NWQ			50.0		1		1
4.8 Miles South of Hardin/Gallatin Co Line	SEQ			50.0		1		1
ILLINOIS 1 (WHITE COUNTY)								
SN 097-0001	SEQ			52.2		1		1
SN 097-0002	NWQ			52.2		1		1
SN 097-0005	NEQ			52.2		1		1
SN 097-0005	NWQ			52.2		1		1
SN 097-0005	SEQ			52.2		1		1
SN 097-0005	SWQ			52.2		1		1
SN 097-0011	NEQ			52.2		1		1
SN 097-0011	NWQ			52.2		1		1
SN 097-0011	SEQ			52.2		1		1
SN 097-0011	SWQ			52.2		1		1
SN 097-0012	NEQ			52.2		1		1
SN 097-0012	NWQ			52.2		1		1
SN 097-0012	SEQ			52.2		1		1
SN 097-0012	SWQ			52.2		1		1
SN 097-0026	SEQ			50.0		1		1
SN 097-0026	SEQ			50.0		1		1
SN 097-0054	NEQ			50.0		1		1
SN 097-0054	NWQ			50.0		1		1
SN 097-0054	SEQ			50.0		1		1
SN 097-0054	SWQ			50.0		1		1
SN 097-0065				52.2		1		1
SN 097-7038	NEQ			52.2		1		1
SN 097-7038	NWQ			52.2		1		1
SN 097-7038	SEQ			52.2		1		1
SN 097-7038	SWQ			52.2		1		1
North of County Road 700N	NEQ			52.2		1		1
North of County Road 700N	SEQ			52.2		1		1
SUBTOTAL ILLINOIS 1		0.0	0	3,653.4	0	72	0	72

- * VARIOUS
- ** D9 GUARDRAIL END SECT FY16-1

FILE NAME =		USER NAME = pritchetill	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	GUARDRAIL SCHEDULE					F.A. R.T.E.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
pw\NL084EBID\INTE\Gullinois.gov\PIDOT\Documents\IDOT Offices\District 9\Projects\78525\Drawings\CA\Sheets\78525-sht.dgn			CHECKED -	REVISED -											
		PLOT SCALE = 100.0000 ' / in.													
Default		PLOT DATE = 3/18/2016	DATE -	REVISED -											
						SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	CONTRACT NO. 78525			
											ILLINOIS FED. AID PROJECT				

GUARDRAIL SCHEDULE

		STEEL PLATE BEAM GUARDRAIL TYPE A, 9 FOOT POSTS	GUARDRAIL MARKERS, TYPE B	GUARDRAIL REMOVAL	IMPACT ATTENUATORS (FULLY REDIRECTIVE, NARROW)	TRAFFIC BARRIER TERMINAL , TYPE 1 (SPECIAL) TANGENT	TRAFFIC BARRIER TERMINAL , TYPE 6	TERMINAL MARKER - DIRECT APPLIED
		FOOT	EACH	FOOT	EACH	EACH	EACH	EACH
ILLINOIS 13 (GALLATIN COUNTY)								
IL 13 Cross Street	NEQ			50.0		1		1
IL 13 Cross Street	NWQ			50.0		1		1
Field Entrance	SEQ			50.0		1		1
Field Entrance	SWQ			50.0		1		1
Old Shawneetown Road	NEQ			50.0		1		1
Old Shawneetown Road	NWQ			50.0		1		1
Field Entrance	SEQ			50.0		1		1
Field Entrance	SWQ			50.0		1		1
Dual Field Entrance	NEQ			50.0		1		1
Dual Field Entrance	NWQ			50.0		1		1
Dual Field Entrance	SEQ			50.0		1		1
Dual Field Entrance	SWQ			50.0		1		1
SN 030-7005	NEQ			52.2		1		1
SN 030-7005	NWQ			52.2		1		1
SN 030-7005	SEQ			52.2		1		1
SN 030-7005	SWQ			52.2		1		1
ILLINOIS 13 (JACKSON COUNTY)								
SN 039-0050	NEQ			52.2		1		1
SN 039-0051	NEQ			52.2		1		1
1.3 Miles West of Williamson/Jackson Co Line	NEQ			52.2		1		1
ILLINOIS 13 (SALINE COUNTY)								
SN 083-0045	NEQ			50.0		1		1
SN 083-0045	NWQ			50.0		1		1
SN 083-0045	SEQ			50.0		1		1
SN 083-0045	SWQ			50.0		1		1
ILLINOIS 13 (WILLIAMSON COUNTY)								
SN 100-0071	NWQ			52.2		1		1
SN 100-0071	SWQ			52.2		1		1
SUBTOTAL ILLINOIS 13		0.0	0	1,269.8	0	25	0	25
ILLINOIS 148 (JEFFERSON COUNTY)								
SN 041-0096	NEQ			52.2		1		1
SN 041-0096	NWQ			52.2		1		1
SN 041-0096	SEQ			52.2		1		1
SN 041-0096	SWQ			52.2		1		1
East of SN 041-0096	NWQ			52.2		1		1
East of SN 041-0096	SWQ			52.2		1		1
West of SN 041-0096	NWQ			52.2		1		1
West of SN 041-0096	SWQ			52.2		1		1

GUARDRAIL SCHEDULE



	STEEL PLATE BEAM GUARDRAIL TYPE A, 9 FOOT POSTS	GUARDRAIL MARKERS, TYPE B	GUARDRAIL REMOVAL	IMPACT ATTENUATORS (FULLY REDIRECTIVE, NARROW)	TRAFFIC BARRIER TERMINAL , TYPE 1 (SPECIAL) TANGENT	TRAFFIC BARRIER TERMINAL , TYPE 6	TERMINAL MARKER - DIRECT APPLIED
	FOOT	EACH	FOOT	EACH	EACH	EACH	EACH
ILLINOIS 148 (WILLIAMSON COUNTY)							
SN 100-0032 NEQ			25.0		1		
SN 100-0032 NWQ			52.2		1		
SN 100-0032 SEQ			52.2		1		
SN 100-0032 SWQ			25.0		1		
SN 100-0033 NEQ			25.0		1		
SN 100-0033 NWQ			52.2		1		
SN 100-0033 SEQ			52.2		1		
SN 100-0033 SWQ			25.0		1		
SN 100-0037 NWQ			50.0		1		
SN 100-0039 SWQ			50.0		1		
SN 100-7041 NEQ			52.2		1		
SN 100-7041 NWQ			52.2		1		
SN 100-7041 SEQ			52.2		1		
SN 100-7041 SWQ			52.2		1		
Little Grassy Road SWQ			50.0		1		
SUBTOTAL ILLINOIS 148	0.0	0	1,085.2	0	23	0	23
ILLINOIS 149 (FRANKLIN COUNTY)							
LT STA 1130+38 TO STA 1136+38	500.0	9			2		2
SUBTOTAL ILLINOIS 149	500.0	9	0.0	0	2	0	2
US 45 (JOHNSON COUNTY)							
SN 044-0010 NEQ			50.0		1		1
SN 044-0010 NWQ			50.0		1		1
SN 044-0058 NWQ			50.0		1		1
SN 044-0058 SEQ			50.0		1		1
SN 044-7041 NWQ			50.0		1		1
2.8 Miles North of Johnson/Massac Co Line NWQ			52.2		1		1
US 45 (MASSAC COUNTY)							
SN 064-0036 NEQ			50.0		1		1
SN 064-0036 NWCL	75.0	4	137.5	1			1
SN 064-0041 ENEQ			52.2		1		1
SN 064-0041 ESEQ			52.2		1		1
SN 064-0041 WNWQ			52.2		1		1
SN 064-0043 SWCL			62.5	1			1
SN 064-0044 SWQ			50.0		1		1
SN 064-7034 SEQ			50.0		1		1
SN 064-9901 NEQ			39.7		1		1
SN 064-9901 NWQ			52.2		1		1


- * VARIOUS
- ** D9 GUARDRAIL END SECT FY16-1



FILE NAME =	USER NAME = pritchett1	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	GUARDRAIL SCHEDULE					F.A. RT.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
pwt\1\084EBIDINTEGullinois.gov\PIDOT\Documents\IDOT Offices\District 9\Projects\78525\Drawings\CA\Sheets\78525-sht.dgn		CHECKED -	REVISED -							•	••	VARIOUS	16	10
	PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -		CONTRACT NO. 78525									
Default	PLOT DATE = 3/18/2016	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT			

GUARDRAIL SCHEDULE



	STEEL PLATE BEAM GUARDRAIL TYPE A, 9 FOOT POSTS	GUARDRAIL MARKERS, TYPE B	GUARDRAIL REMOVAL	IMPACT ATTENUATORS (FULLY REDIRECTIVE, NARROW)	TRAFFIC BARRIER TERMINAL , TYPE 1 (SPECIAL) TANGENT	TRAFFIC BARRIER TERMINAL , TYPE 6	TERMINAL MARKER - DIRECT APPLIED
	FOOT	EACH	FOOT	EACH	EACH	EACH	EACH
US 45 (SALINE COUNTY)							
0.1 Miles North of SN 083-0001			50.0		1		1
SN 083-0042 SEQ			50.0		1		1
Peabody Rd			42.0				
US 45 (WHITE COUNTY)							
SN 097-0013 NEQ			50.0		1		1
SN 097-0013 NWQ			50.0		1		1
SN 097-0013 SEQ			50.0		1		1
SN 097-0013 SWQ			50.0		1		1
SN 097-0014 NEQ			50.0		1		1
SN 097-0014 NWQ			50.0		1		1
SN 097-0014 SEQ			50.0		1		1
SN 097-0014 SWQ			50.0		1		1
SN 097-0023 NEQ			52.2		1		1
SN 097-0023 NWQ			52.2		1		1
SN 097-0024 NEQ			52.2		1		1
SN 097-0024 NWQ			52.2		1		1
SN 097-0024 SEQ			52.2		1		1
SN 097-0024 SWQ			52.2		1		1
SN 097-0062 NEQ			52.2		1		1
SN 097-0062 NWQ			52.2		1		1
SN 097-0062 SEQ			52.2		1		1
SN 097-0062 SWQ			52.2		1		1
SN 097-0063 NEQ			52.2		1		1
SN 097-0063 NWQ			52.2		1		1
SN 097-0063 SEQ			52.2		1		1
SN 097-0063 SWQ			52.2		1		1
1.4 Miles North of White/Gallatin Co Line NEQ			50.0		1		1
1.4 Miles North of White/Gallatin Co Line NWQ			50.0		1		1
1.4 Miles North of White/Gallatin Co Line SEQ			50.0		1		1
1.4 Miles North of White/Gallatin Co Line SWQ			50.0		1		1
SUBTOTAL US 45	75.0	4	2,373.5	2	42	0	44
TOTAL	2,850.0	69	11,370.1	2	202	14	204

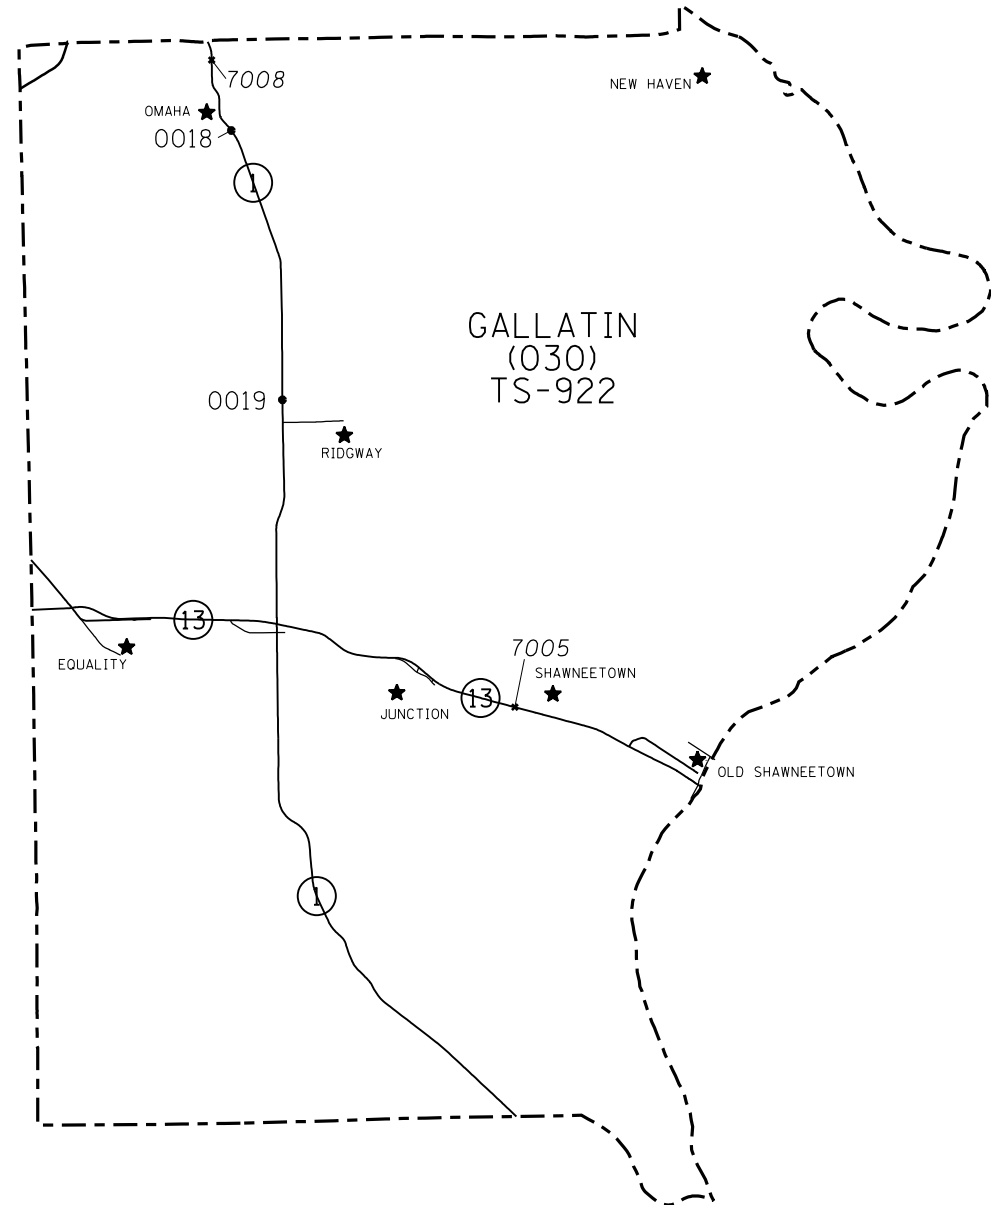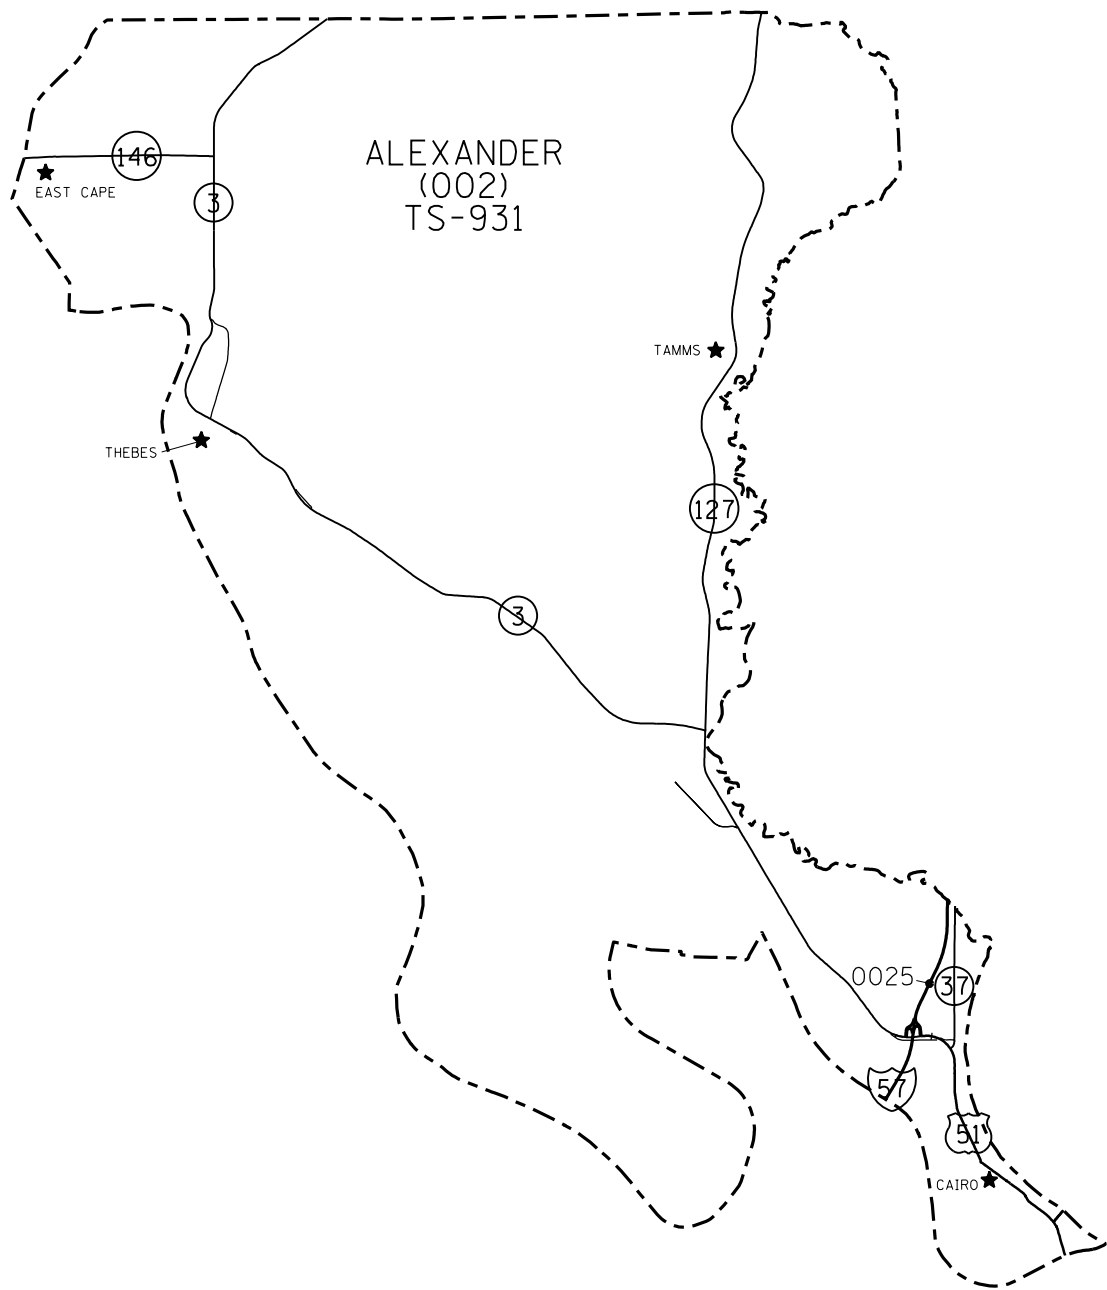

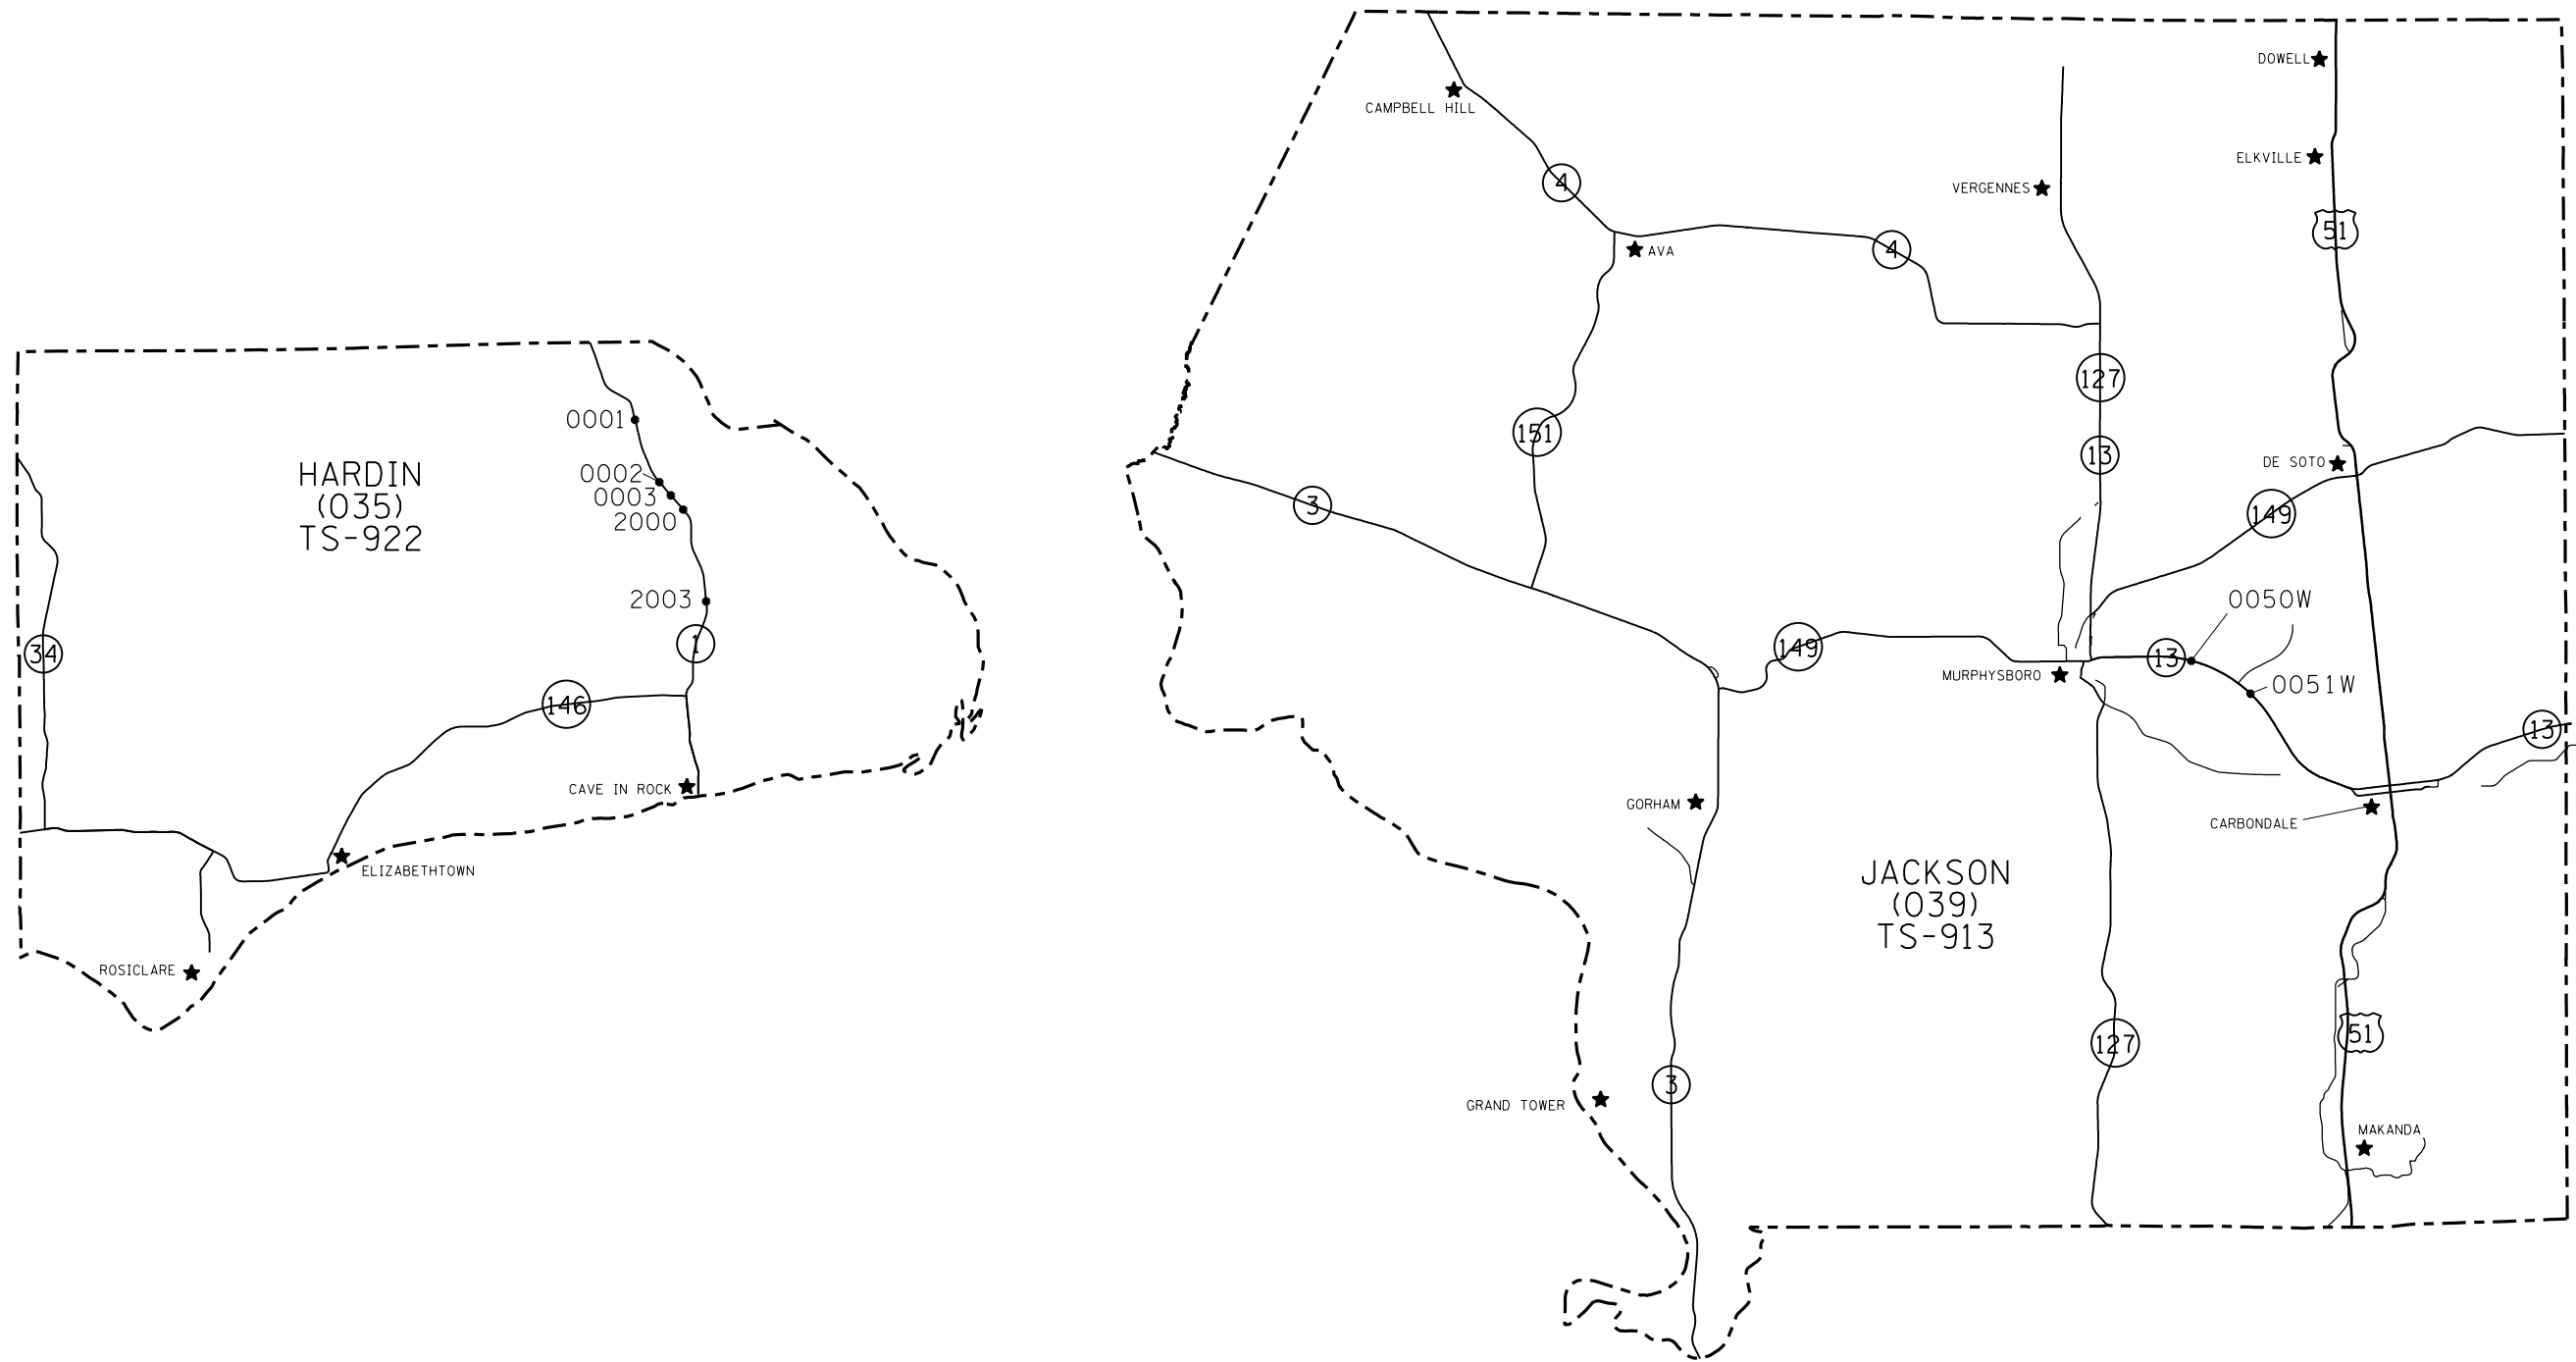

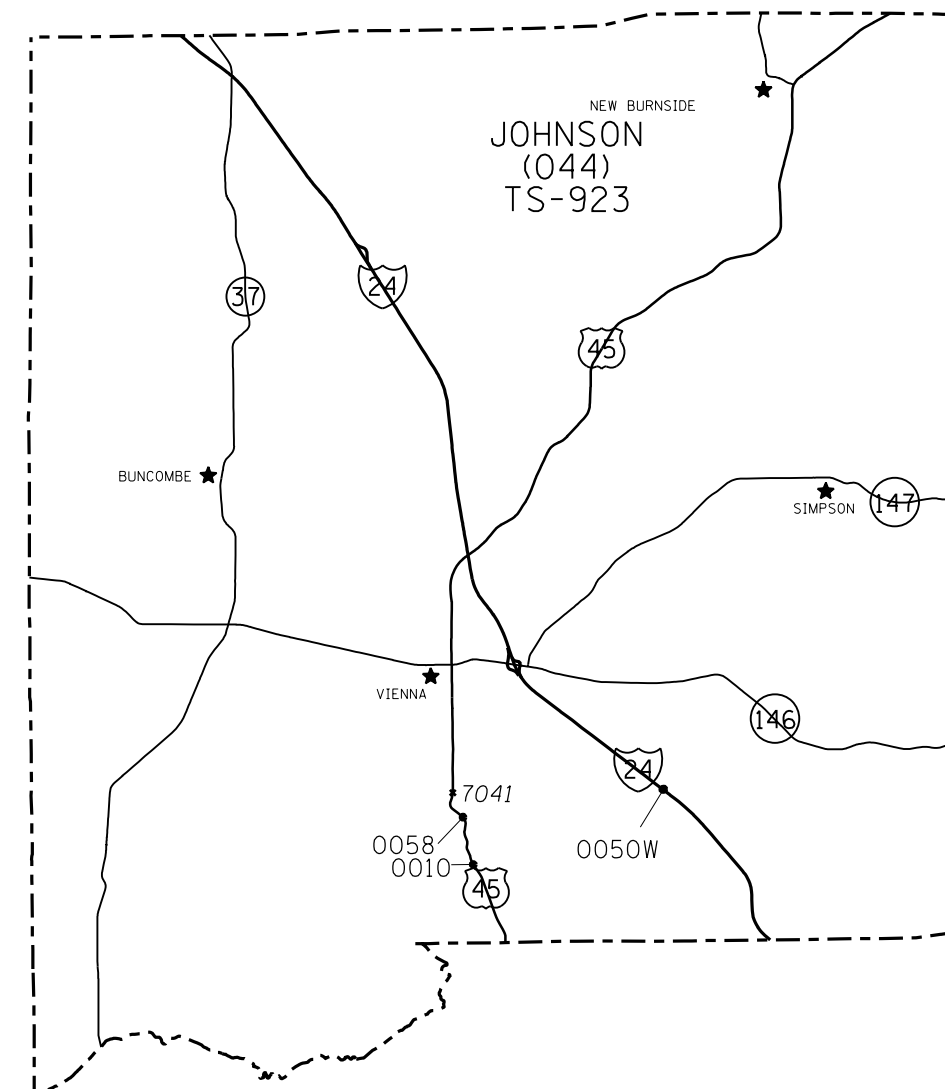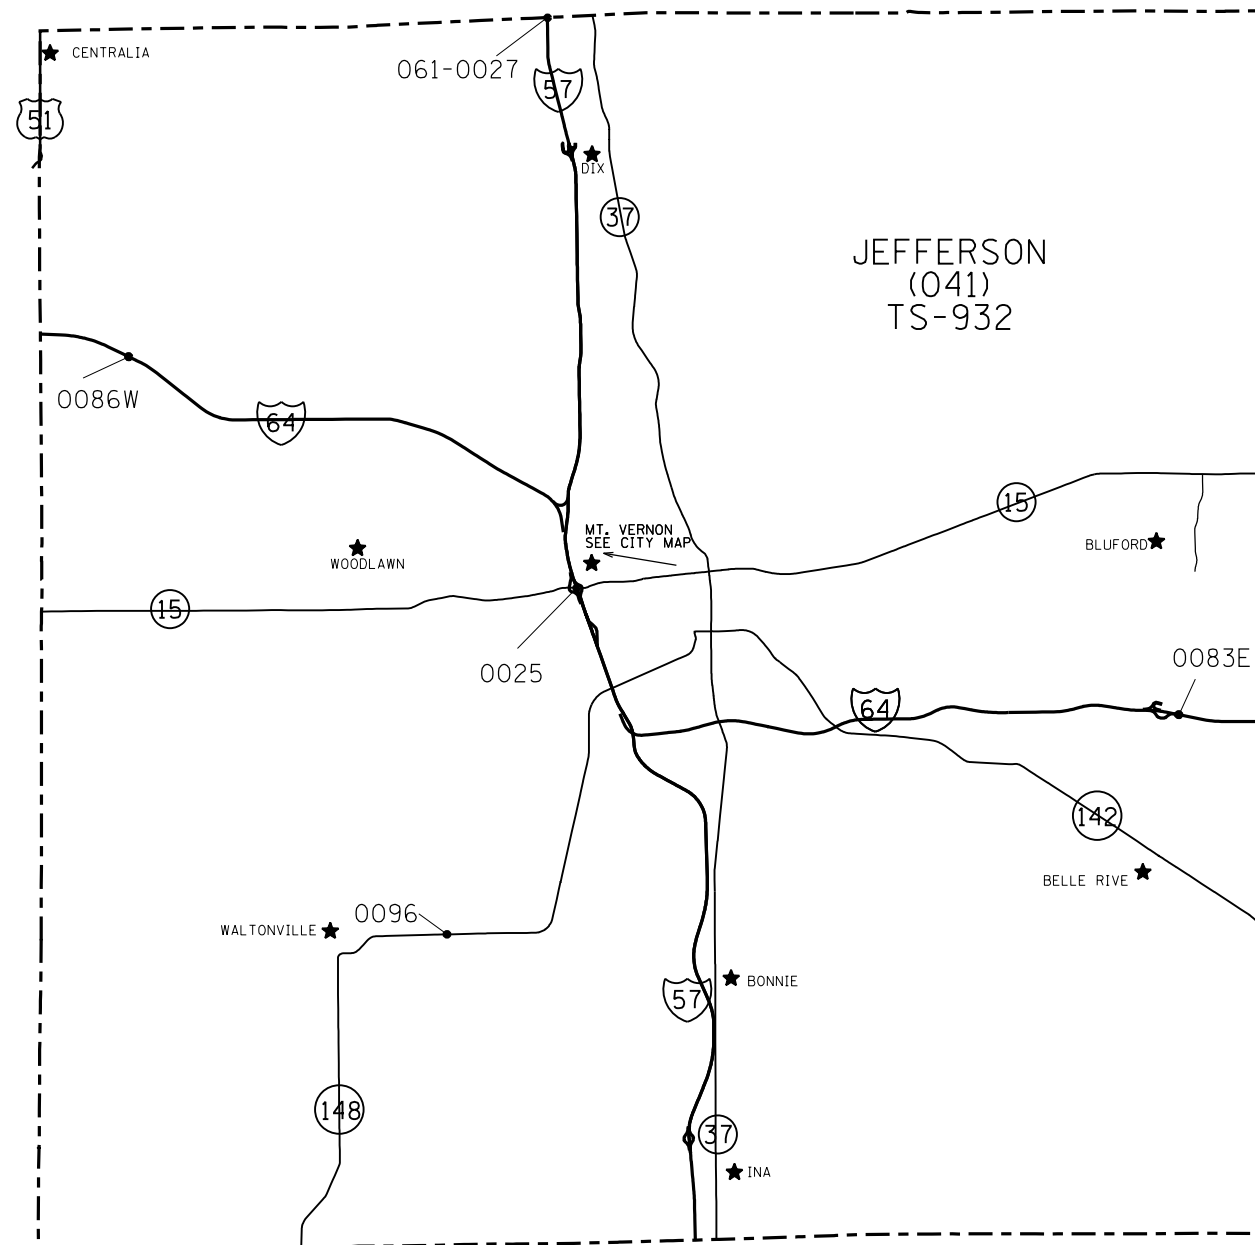

FILE NAME = USER NAME = pritchett1 DESIGNED - REVISED - pr\\IL084EBIDINTEG.illinois.gov\\PIDOT\\Documents\\IDOT Offices\\District 9\\Projects\\78525- DEAIN\\78525-CA0\\sheets\\78525-sht.dgn REVISED - PLOT SCALE = 100.0000 ' / in. CHECKED - REVISED - Default PLOT DATE = 3/18/2016 DATE - REVISED -				STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION		STRUCTURE MAP JEFFERSON & JOHNSON COUNTY				F.A. RTE. SECTION COUNTY TOTAL SHEETS SHEET NO. .. D9 GUARDRAIL END SECT FY16-1 .. VARIOUS VARIOUS 16 14 CONTRACT NO. 78525	
						SCALE: SHEET OF SHEETS STA. TO STA.				ILLINOIS FED. AID PROJECT	

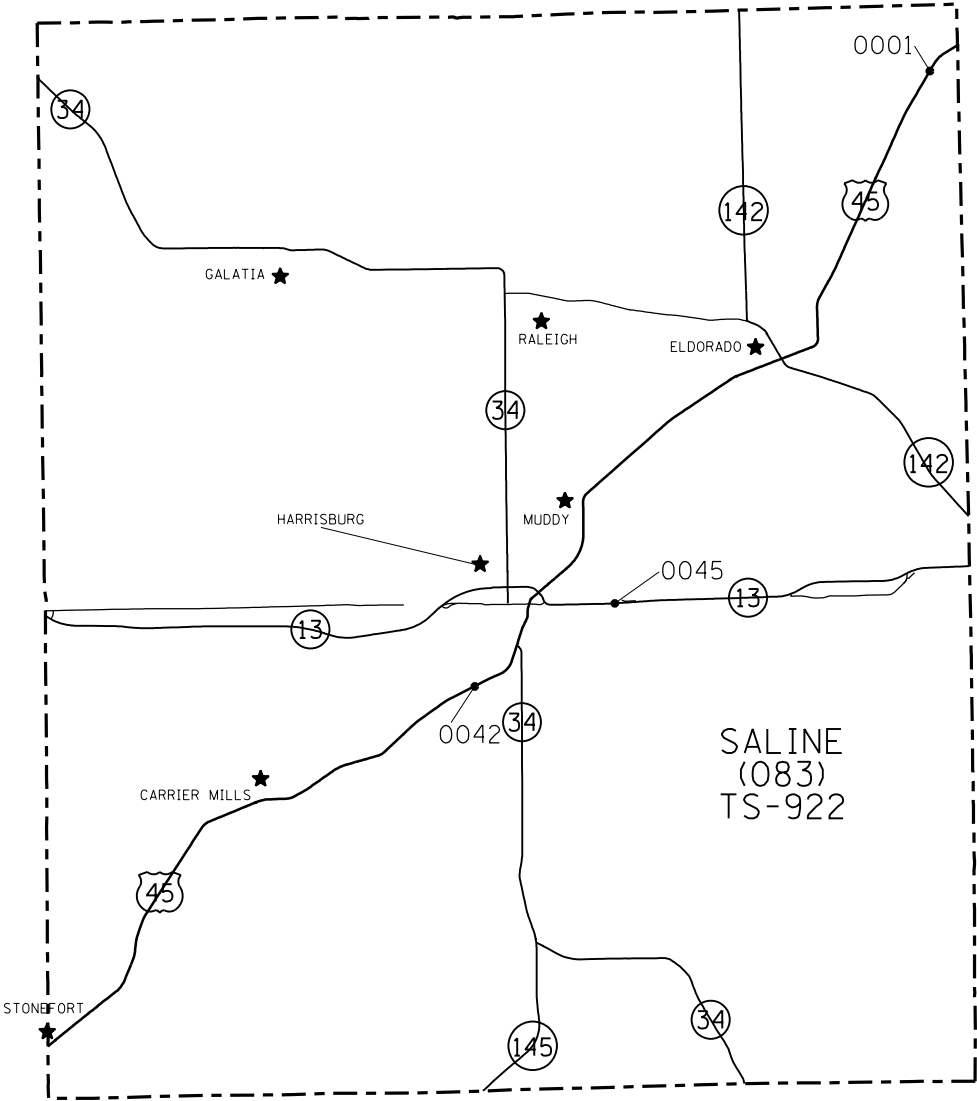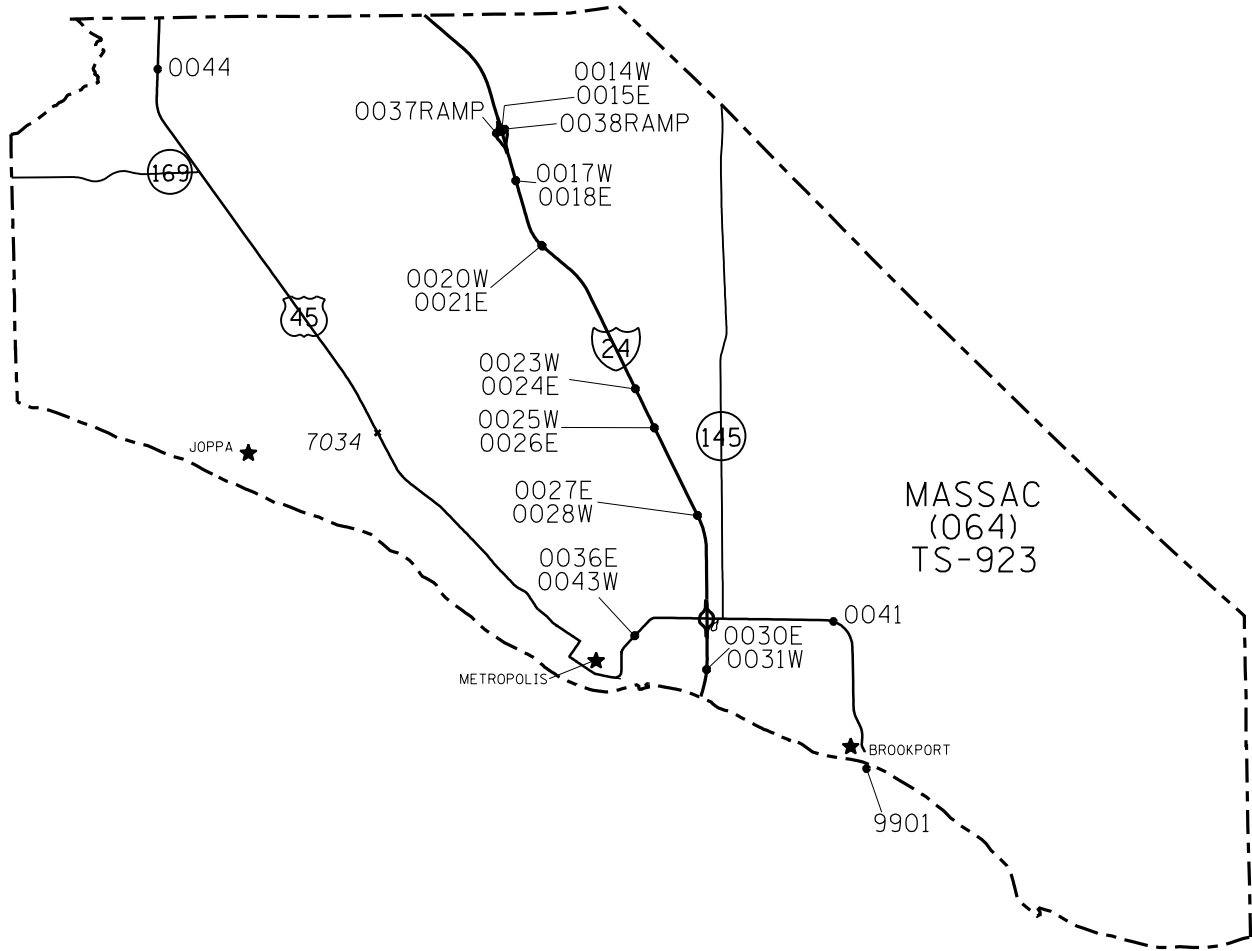

• VARIOUS
• D9 GUARDRAIL END SECT FY16-1

FILE NAME =	USER NAME = pritchettll	DESIGNED -	REVISED -
p:\11\084EBIDINTEG\illinois.gov\PWIDOT\Documents\IDOT Offices\District 9\Projects\78525\Drawn to CAD\Drawn to CAD sheets\78525-sht.dgn		DESIGNED -	REVISED -
Default	PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
	PLOT DATE = 3/18/2016	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

STRUCTURE MAPS
MASSAC & SALINE COUNTY

SCALE: SHEET OF SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	••	VARIOUS	16	15
		CONTRACT NO. 78525		
ILLINOIS		FED. AID PROJECT		

